

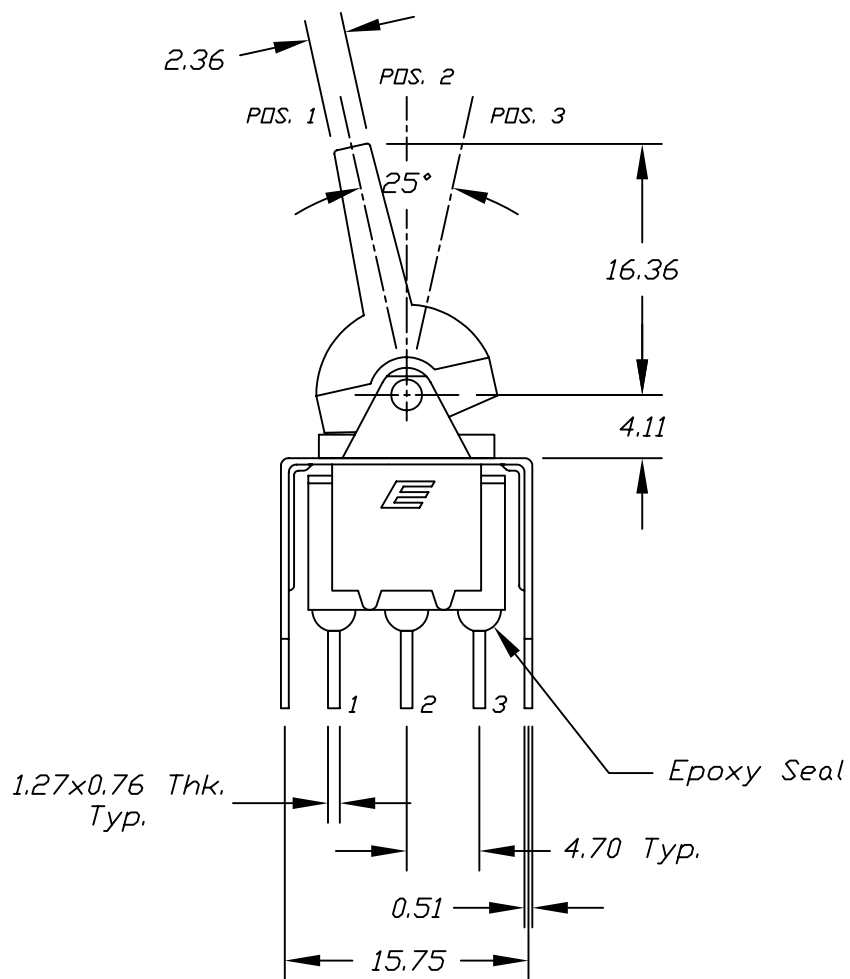
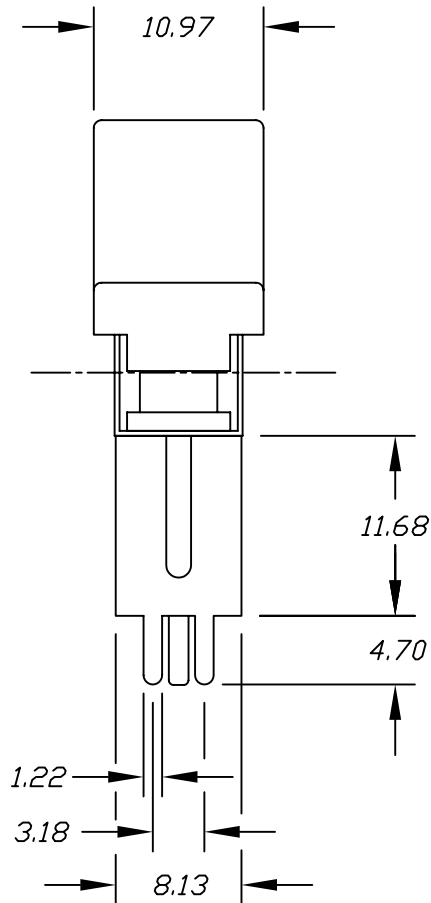


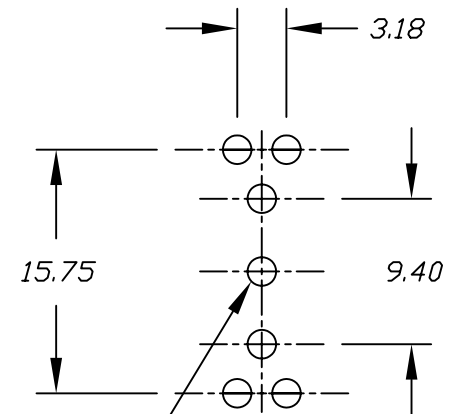

RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	(ON)
2-3	OPEN	2-1

()=Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: 0.4 (VA) Max. @20V Max. (AC or DC)

2. TERM. NOS. FOR REF ONLY				TOLERANCES	±0.4	±0.25	E-SWITCH®					
3. RATING: 0.4 (VA) Max. @20V Max. (AC or DC)							TITLE					
A	RELEASED FOR PRODUCTION						300 SP-5 J6 VS2 R E					
REV.	DESCRIPTION		DATE				CHKD	SCALE			DATE	DR
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				0.0	0.00	2:1		7/20/98		MM	T315010	A