SHEET OF

TOP VIEW -SHOW ORIENTATION OF LEGENDS
IN RESPECT TO THE PCB PIN TERMINALS.

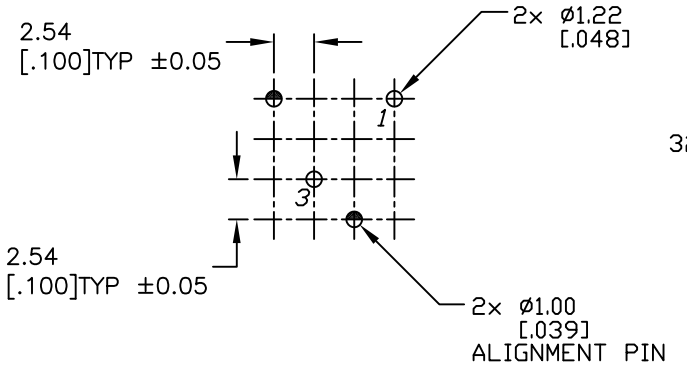

RECOMMENDED P.C.B. LAYOUT

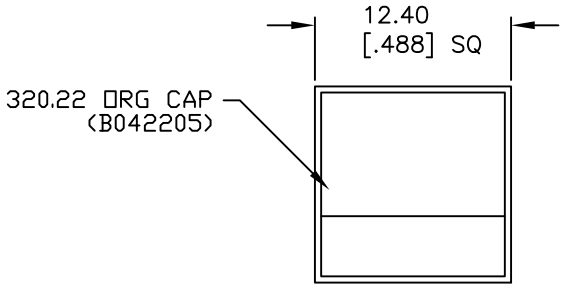

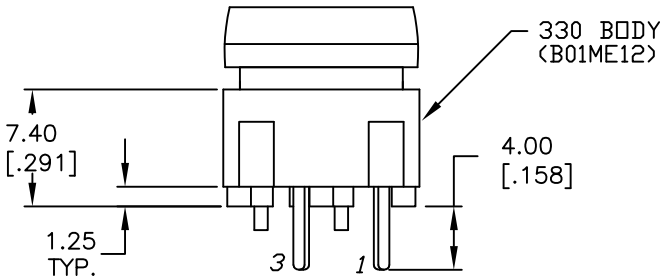



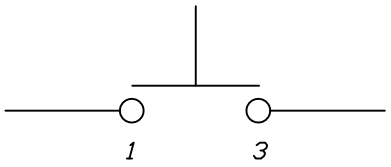

CIRCUIT: SPST
CONTACT CONFIGURATION

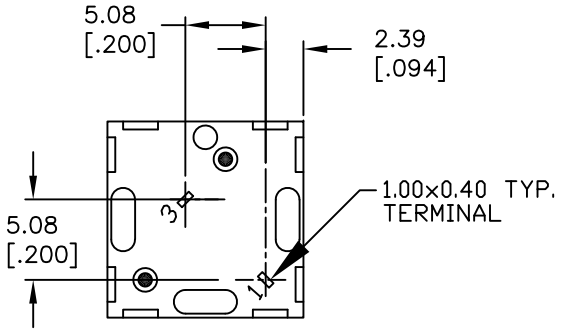

NOTES:
1. ALL DIMINSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NO'S FOR REFERENCE ONLY.
4. RATING: 25mA, @50VDC
▲ 5. MATERIALS: TERMINALS GOLD PLATED
6. OPERATING FORCE: 120gF
7. TRAVEL TO MAKE: 0.7mm
8. OPERATING TEMP: −25° TO 75°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	20188	CORRECT BODY CALL-OUT	09/29/11	BMA
A	11797	RELEASED FOR PRODUCTION	10/29/01	CJC

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 330.22 E1-1 ORG (Gold Contacts)

SCALE	DATE	DR	DWG	REV
2:1	10/29/01	CJC	XB0881P	B