


SHEET 1 OF 1

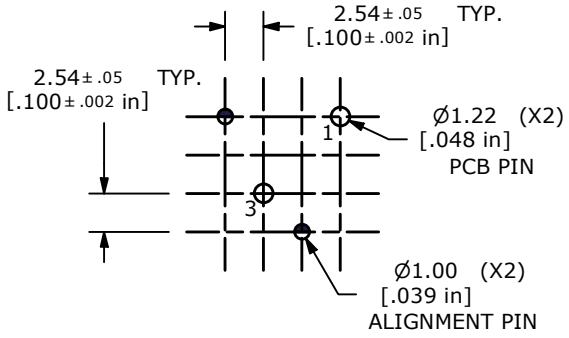


RECOMMENDED P.C.B. LAYOUT

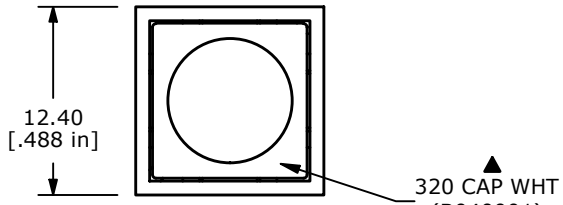






ISOMETRIC



CIRCUIT: SPST
CONTACT CONFIGURATION

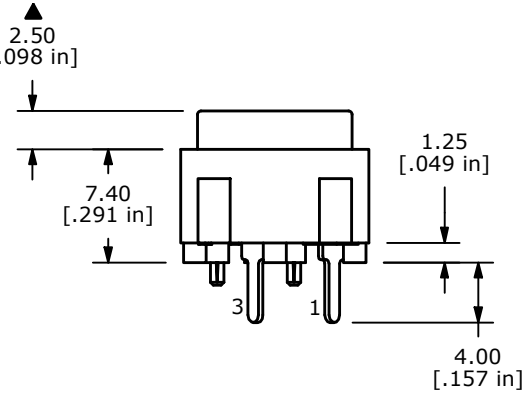

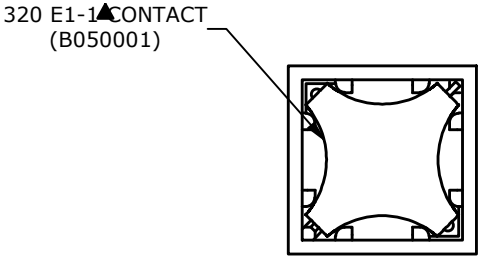

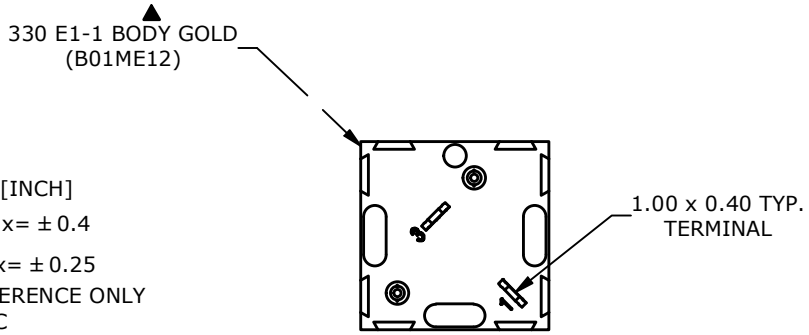

TOP VIEW W/CAP REMOVED

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x= ± 0.4
   x.xx= ± 0.25
3. TERMINAL NO'S FOR REFERENCE ONLY
4. RATING: 25mA, @ 50VDC
▲ 5. OPERATING FORCE: 120 GRAMS
6. TRAVEL TO MAKE: 0.7MM
7. ▲DENOTES CRITICAL PARAMETER
8. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	16053	REVISED AND REDRAWN	5/25/06	CT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE	SCALE	DATE	DR	DWG	REV
330E11WHT	2:1	1/12/2001	CJB	XB0811P	B