



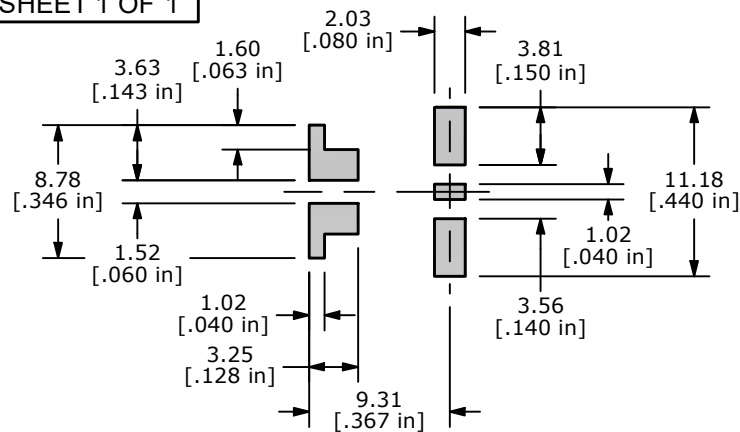







RECOMMENDED P.C.B. LAYOUT

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1



NOTES:

- ALL DIMENSIONS IN MM[INCH].
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NOS. FOR REFERENCE ONLY.
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- ▲ 5. CONTACT MATERIAL: SILVER
6. CONTACT RATING: 1 AMP @250 VAC
3 AMPS @120 VAC OR 28 VDC
7. CONTACT RESISTANCE: 20MILLI-OHMS MAX. INITIAL @2-4 VDC
8. OPERATING TEMPERATURE: -30°C to 85°C.
- ▲ 9. TERMINALS TO BE COPLANAR TO WITHIN 0.1[.004]
- ▲ 10. ▲ DENOTES CRITICAL PARAMETER
11. PACKAGING: TAPE AND REEL 450 PCS. PER REEL

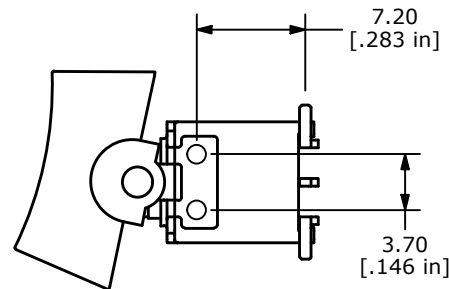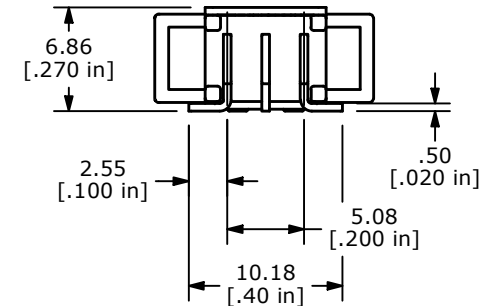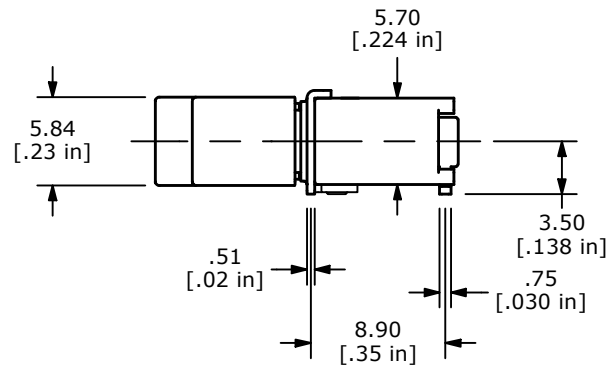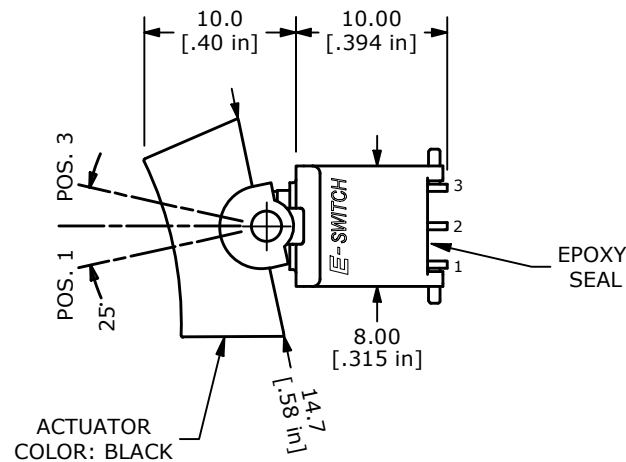

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
G	ECO-103397	Release	04/25/25	MW	TITLE 400BWMSP1R2BLKSM6QE				000025500
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	4/17/2008	BLR	T460000	G