


SHEET 1 OF 1

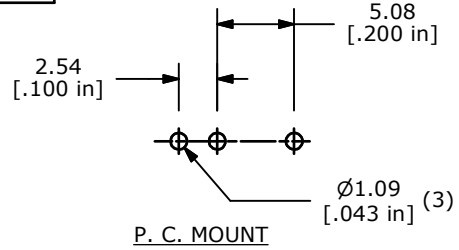

P. C. MOUNT

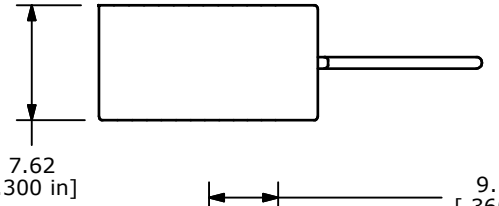


ISOMETRIC

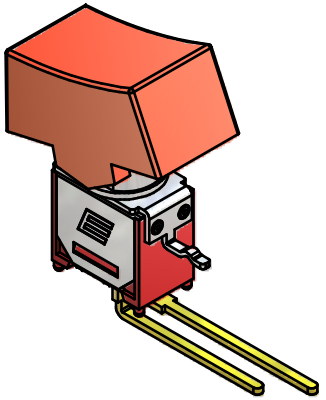



▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	OFF
2-1	N/A	OPEN



CIRCUIT: SPST

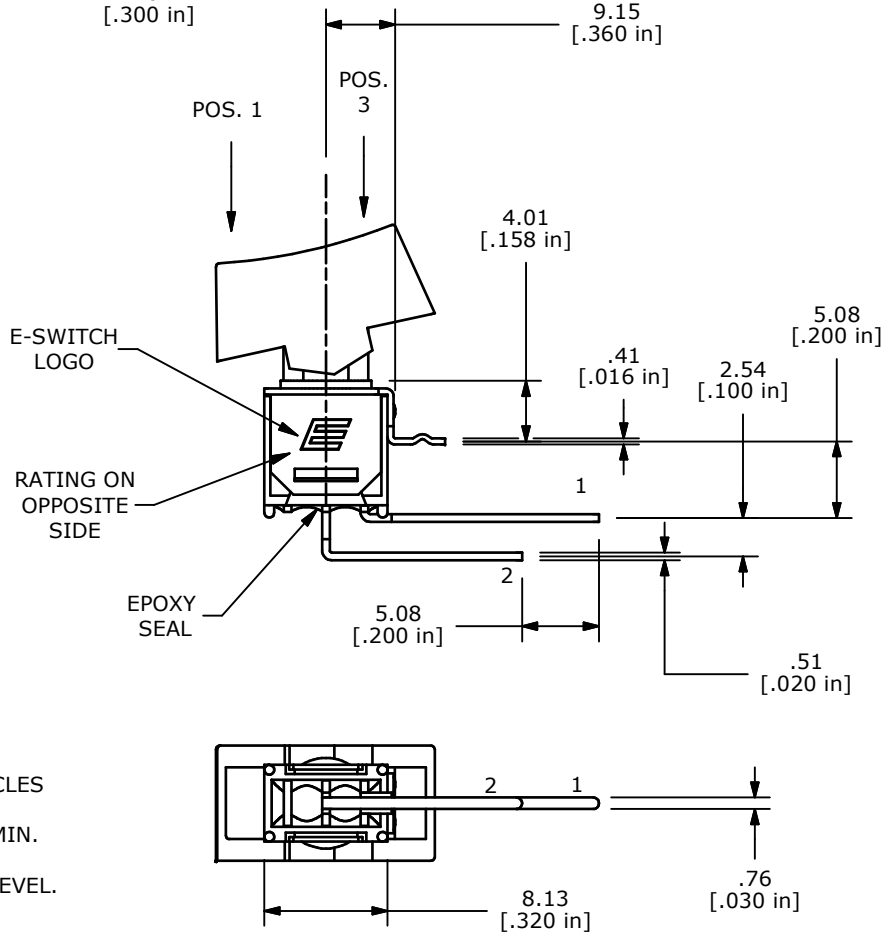

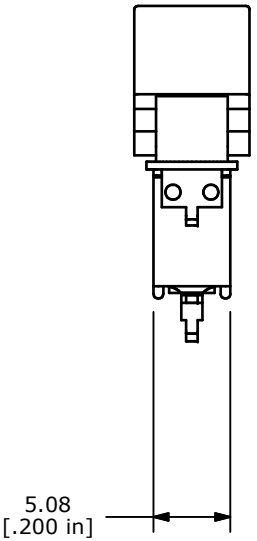

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. PLATING MATERIAL: SILVER
5. RATING: 3A @120VAC (or 28 VDC)
   1A @250VAC
6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 Mega-OHM MIN.
8. CONTACT RESISTANCE: 20 Milli-OHMS MAX.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	19130	RELEASED FOR PRODUCTION	6/28/10	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH® | LAMB™ INDUSTRIES

TITLE 400MSP9R1REDM71QE

SCALE	DATE	DR	DWG	REV
2:1	6/28/2010	BLR	T416114	A