


SHEET 1 OF 1

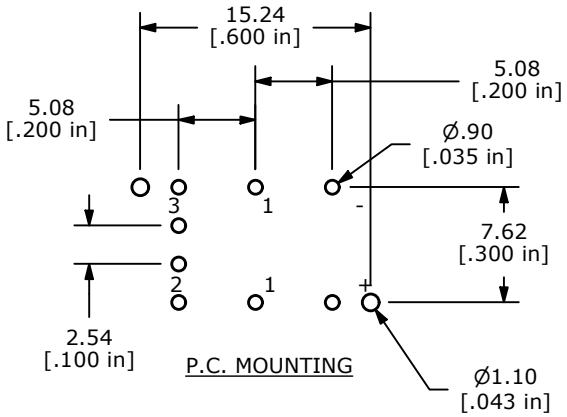



P.C. MOUNTING




CIRCUIT: SPDT

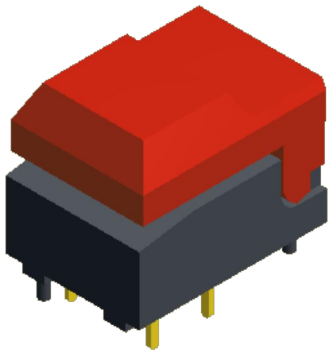

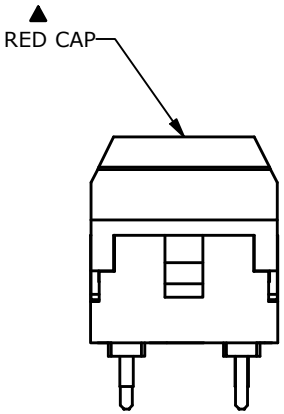

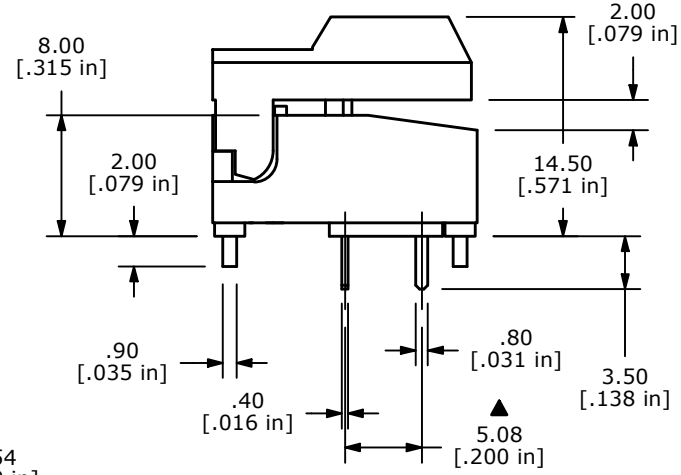

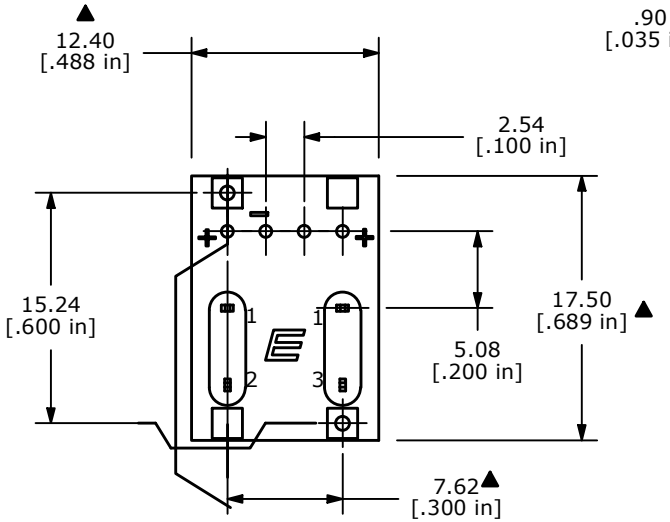

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
▲ 4. RATING: 12mA @ 24VDC
5. CONTACT RESISTANCE: 50mΩ MAX
6. INSULATION RESISTANCE: 100MΩ
7. CONTACTS: FIXED AND MOVING:
   COPPER ALLOY W/GOLD PLATE
8. OPERATING FORCE: 170± 50grams
9. TRAVEL: 2.5± 0.5
10. OPERATING LIFE: 500,000 CYCLES MIN
11. OPERATING TEMPERATURE: -10˚C TO 60˚C
12. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-103909	CAP COLOR RED WAS BLUE	01/29/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000028338

TITLE 5501M5X

SCALE	DATE	DR	DWG	REV
2:1	10/27/2014	AS	XR0146P	C