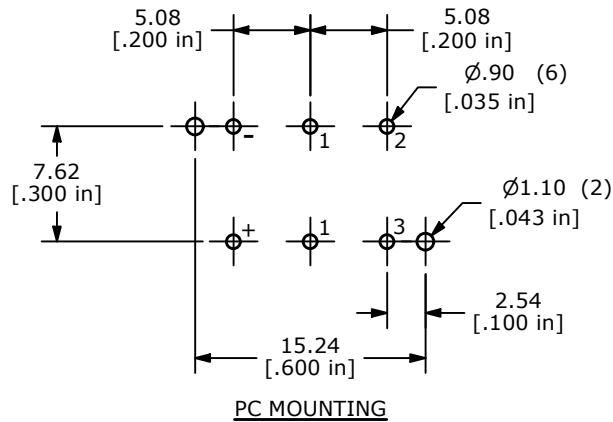
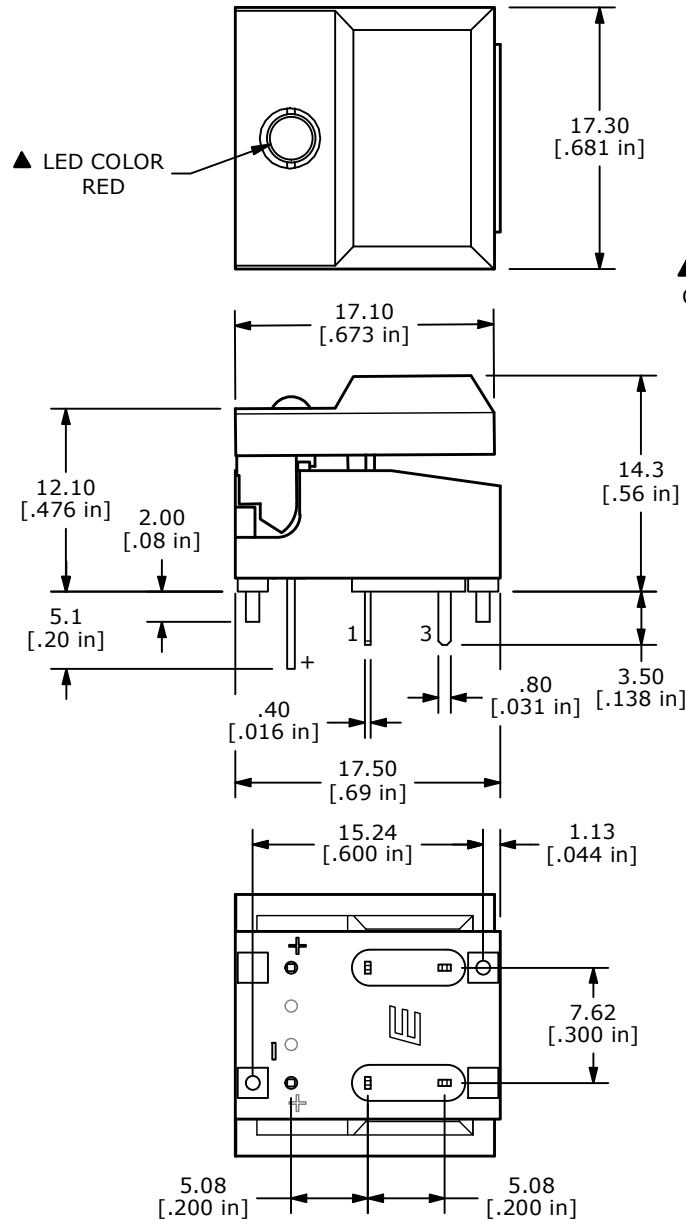
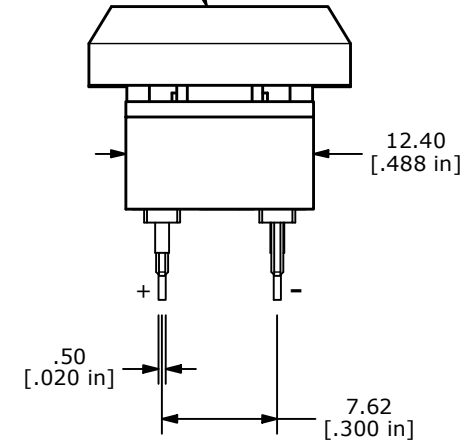


CIRCUIT: SPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATINGS: 30mA @ 12VDC
5. CONTACTS: FIXED AND MOVING:
COPPER ALLOY W/GOLD PLATE
6. OPERATING LIFE: 500,000 CYCLES
7. CONTACT RESISTANCE: 50M OHM MAX (INITIAL)
8. OPERATING FORCE: 150 ± 50 gf
9. OPERATING TRAVEL: 2.5 ± 0.5 mm
10. ▲ DENOTES CRITICAL PARAMETER.

▲ ACTUATOR
COLOR: BLACK

LED SPECS	UNITS	RED
FORWARD CURRENT	mA	30 MAX
FORWARD VOLTAGE	V	1.9 - 2.8
LUMINOUS INTENSITY	mcd	22 TYP

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID			
A	ECO-102418	Release	12/28/23	MW						100126420			
					TITLE 5511MBLKREDX								
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1		DATE 12/13/2023		DR MW		DWG XR0254P		REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED