


SHEET 1 OF 1

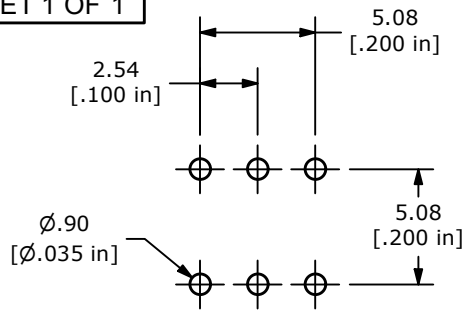


PC MOUNTING

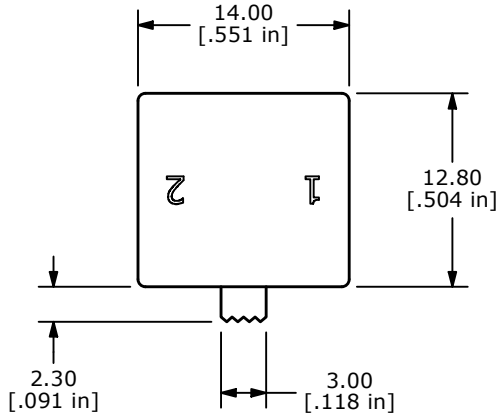





▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
2-1, 5-4	OPEN	2-3, 5-6



CIRCUIT DIAGRAM

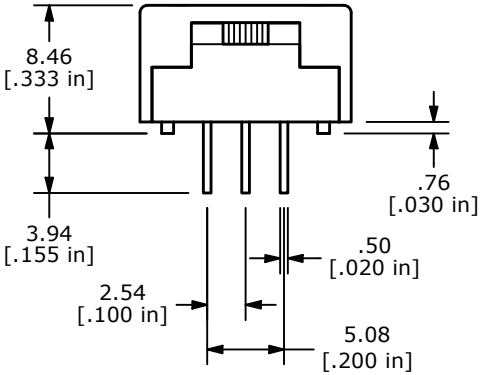

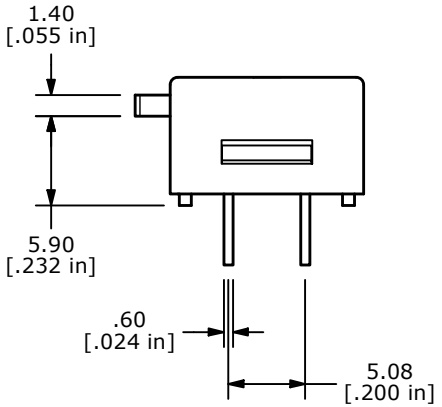

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 1A @ 250VAC
   3A @ 120VAC OR 28VDC
6. ELECTRICAL LIFE: 6,000 ACTUATIONS AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -40°C to 80°C
▲10. TRAVEL: 2.00mm
11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
F	ECO-104317	Print update	08/26/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000025670

TITLE 600DP3S3M2Q

SCALE	DATE	DR	DWG	REV
2:1	9/25/2007	BF	T620306	F