
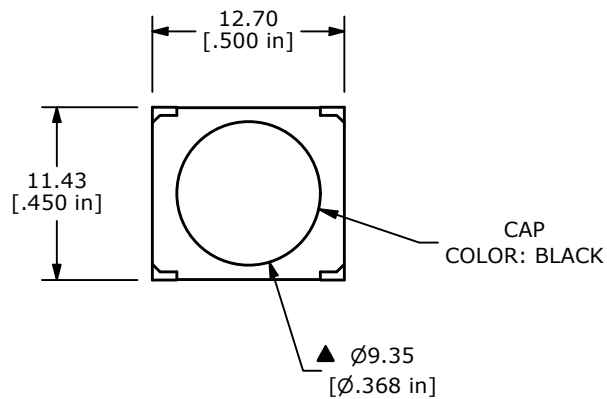
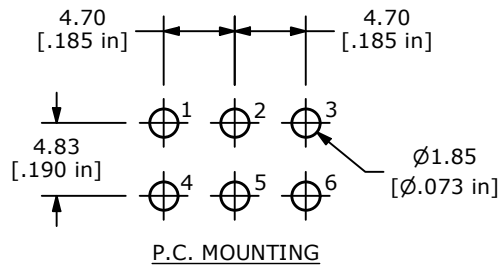




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

() = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: RATING: 1 AMP @ 250 VAC
3 AMP @ 120 VAC or 28VDC
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
7. MECHANICAL LIFE: 50,000 CYCLES
- ▲ 8. INSULATION RESISTANCE: 1,000 M Ω MIN.
9. ACTUATION FORCE: 800 ± 200 gf
10. TRAVEL: 1.0 ± 0.2 mm
11. CONTACT RESISTANCE: 20 m Ω MAX.
TYPICAL @ 2-4 VDC
12. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
13. OPERATING TEMP.: -40°C to 85°C
14. ▲ DENOTES CRITICAL PARAMETER.

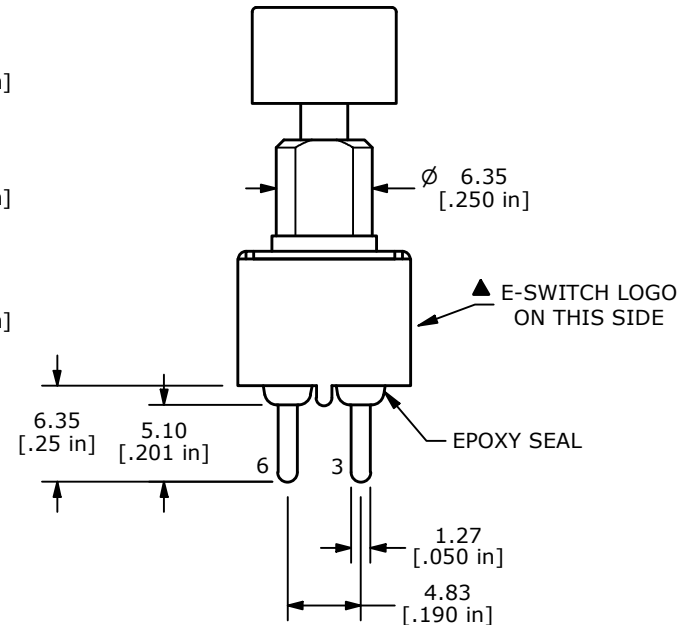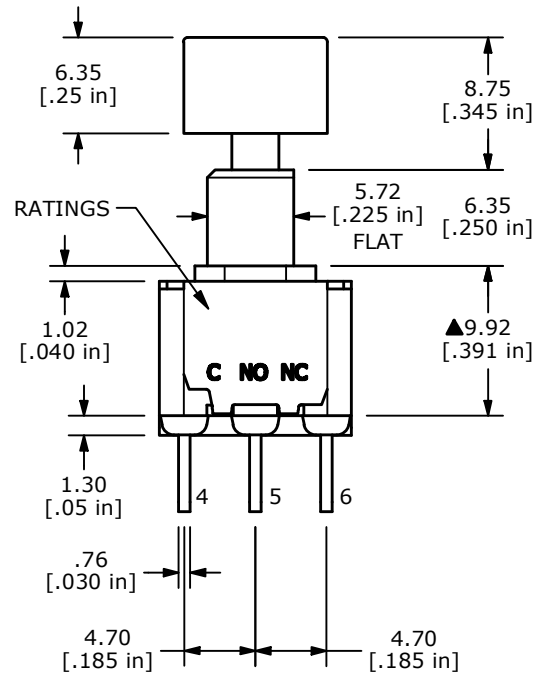

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102933	700 SERIES UPDATE	09/25/24	JS	TITLE 700DP7B21M2QEC2BLK				100118078
					SCALE 2:1	DATE 8/20/2021	DR MW	DWG T721033	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED