





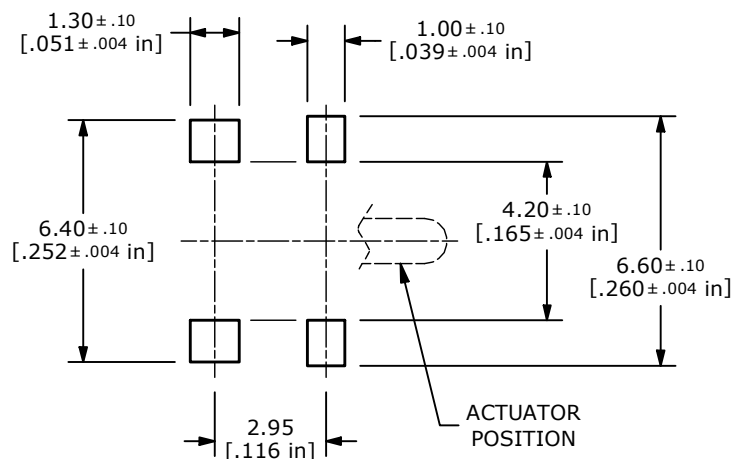


RECOMMENDED PCB LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT/TERMINAL PLATING: SILVER
5. RATING: 100mA 12VDC (RESISTIVE LOAD)
6. OPERATING FORCE: 100gf MAX.
7. OPERATING LIFE: 50,000 CYCLES min.
8. INSULATION RESISTANCE: 100M OHMS min @500VDC
9. OPERATING TEMPERATURE: -40°C to 105°C
10. DIELECTRIC STRENGTH: >1,000 VRMS AT SEA LEVEL
11. ▲ DENOTES CRITICAL PARAMETER

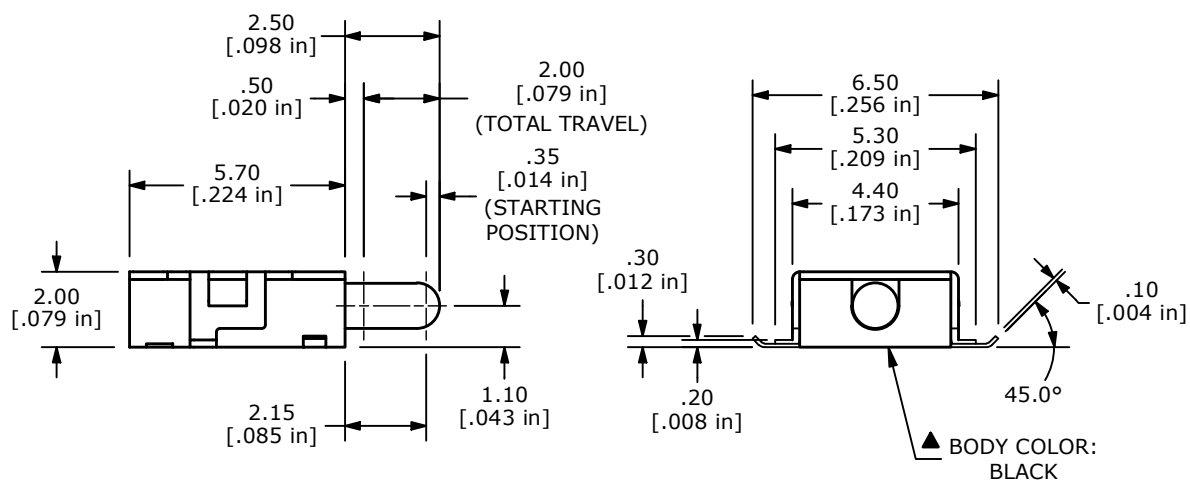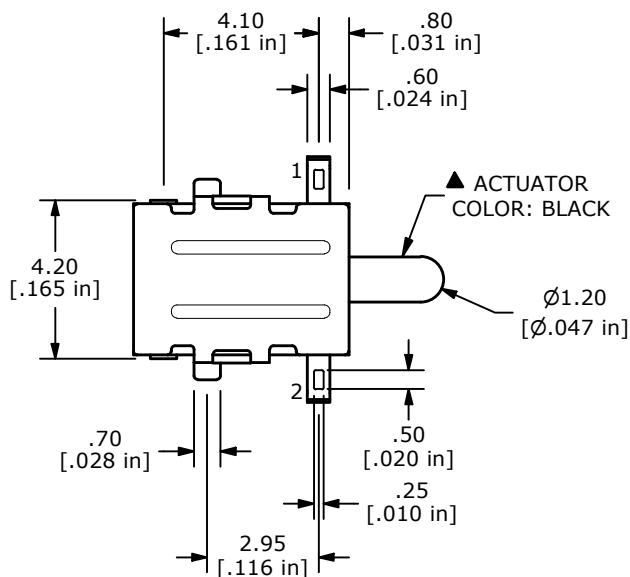

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
H	ECO-104199	Print update	06/25/26	MW	TITLE 900AGQ				000018041
					SCALE	DATE	DR	DWG	REV
					5:1	5/10/2002	CJB	P010900	H

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED