



SHEET 1 OF 1

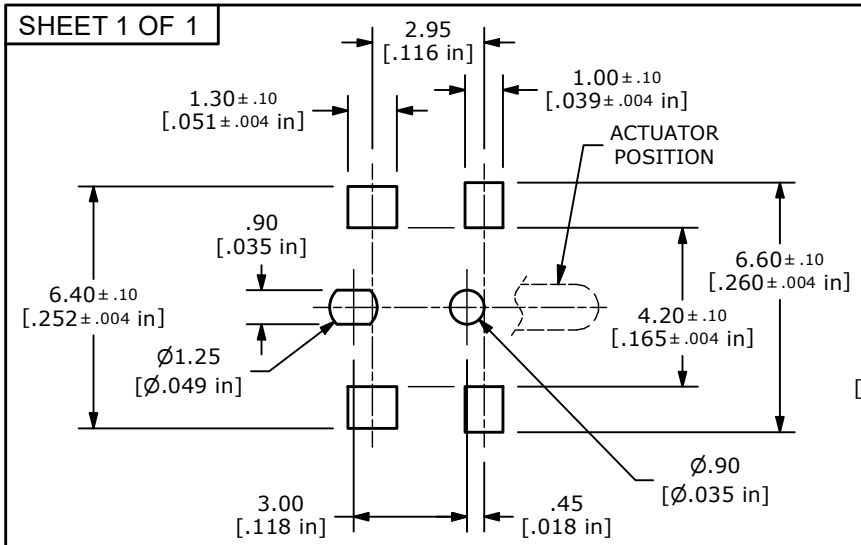


RECOMMENDED PCB LAYOUT

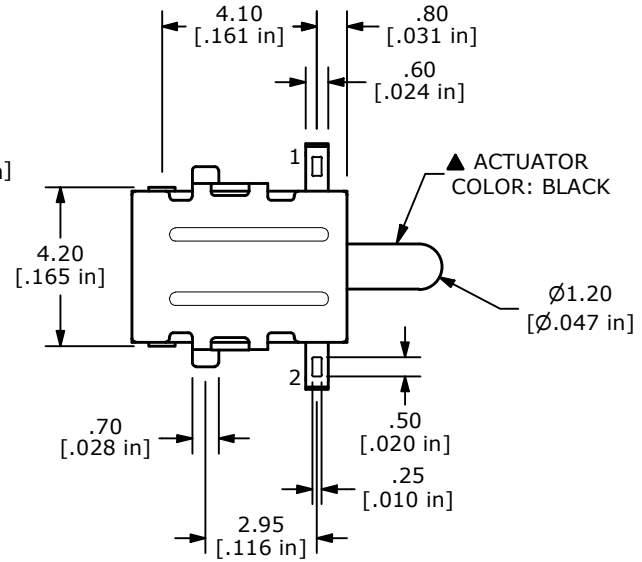






▲ CIRCUIT: SPST
NORMALLY OPEN

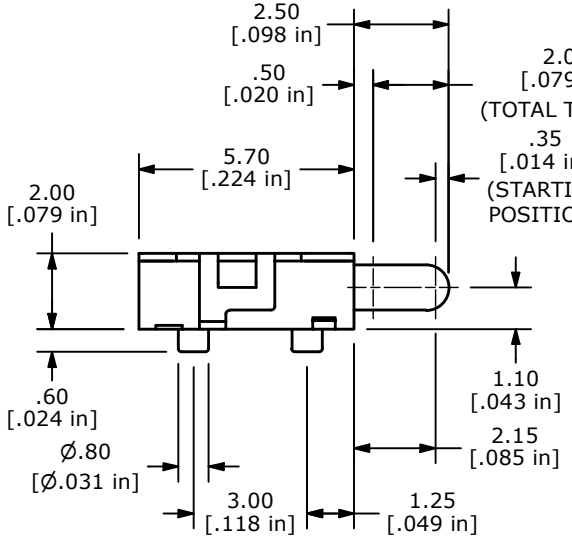

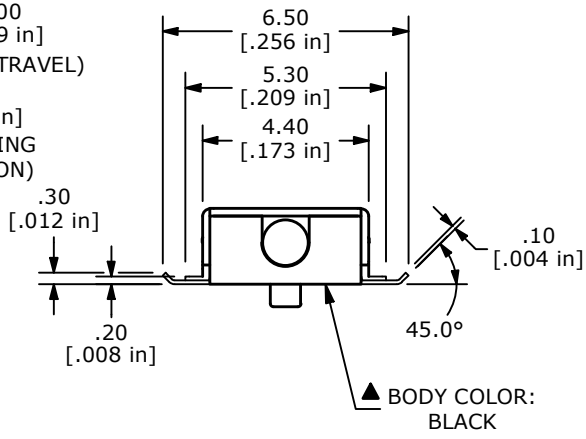

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT/TERMINAL PLATING: SILVER
5. RATING: 100mA 12VDC (RESISTIVE LOAD)
6. OPERATING FORCE: 100gf MAX.
7. OPERATING LIFE: 50,000 CYCLES min.
8. INSULATION RESISTANCE: 100M OHMS min @500VDC
9. OPERATING TEMPERATURE: -40°C to 105°C
10. DIELECTRIC STRENGTH: >1,000VRMS AT SEA LEVEL
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
I	ECO-104199	Print update	06/25/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000018042

TITLE 900BGQ

SCALE	DATE	DR	DWG	REV
5:1	8/24/1998	MM	P010901	I