


SHEET 1 OF 1




RECOMMENDED PANEL CUTOUT
MAX. PANEL TICKNESS 5mm

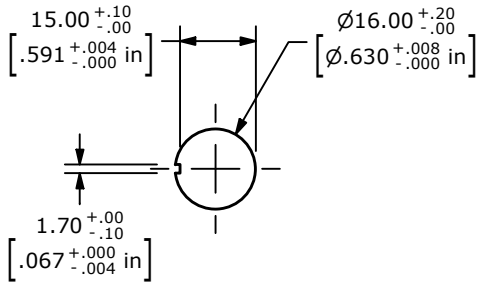




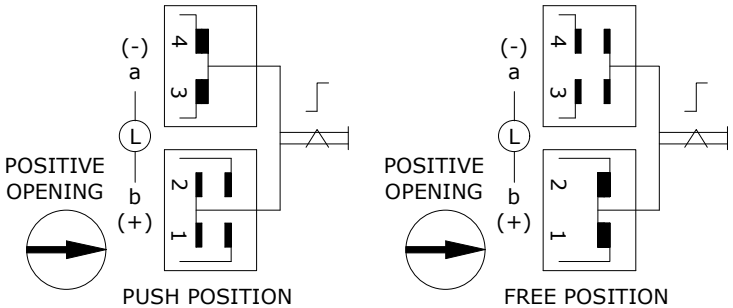


PUSHLOCK TURN TO RESET
1NC+1NO

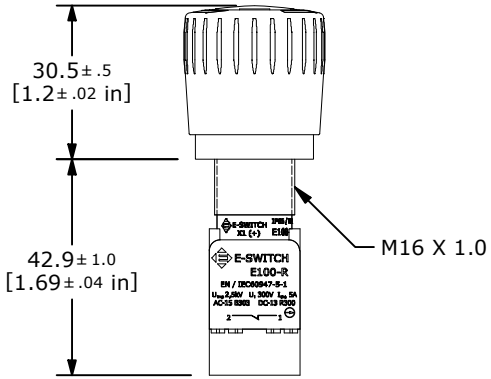

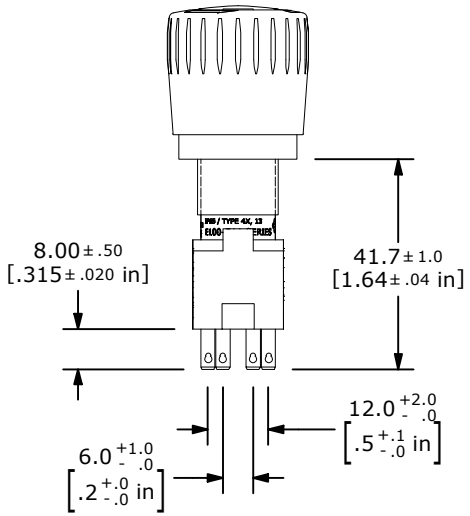

SIDE VIEW SHOWN
WITHOUT TERMINAL SHROUD

NOTE:
1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATINGS: 3A @ 125VAC, 1.5A @ 250VAC
   0.22A @ 24VDC, 0.11A @ 250VDC
5. AGENCY APPROVALS: TUV, EN 60947-5-1 : EN 60947-5-5
6. CONTACT RESISTANCE: 50mΩ MAX. (INITAL)
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. MECHANICAL LIFE: 100,000 CYCLES
11. OPERATING TEMPERATURE: -25°C TO 55°C
12. ▲ DENOTES CRITICAL PARAMETER
▲ 13. ILLUMINATION VOLTAGE: 20mA 24V
14. HARDWARE INCLUDED (NOT SHOWN): 1 GASKET, 1 EMERGENCY STOP ID PLATE, & 1 MOUNTING RING

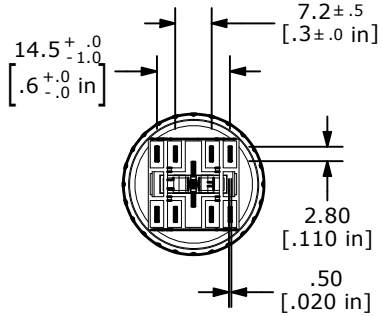

BOTTOM VIEW SHOWN
WITHOUT SHROUD ACTUATOR

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-102018	E100 TITLE UPDATES	09/28/23	MR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100123342

TITLE E100-R11-H1KR

SCALE	DATE	DR	DWG	REV
2:3	2/22/2023	MJR	F011000	B