


SHEET OF

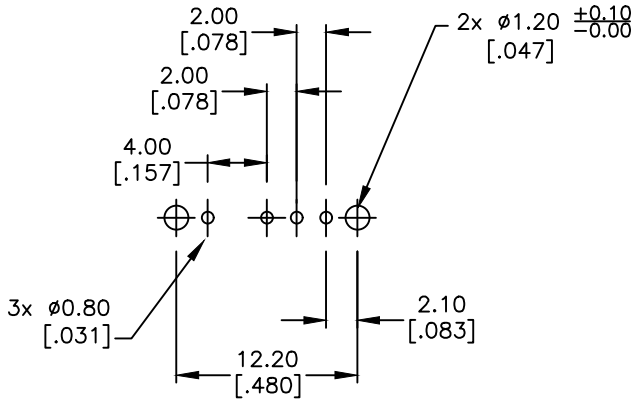


RECOMMENDED P.C.B. LAYOUT



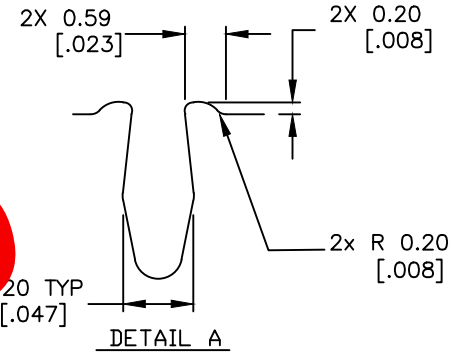



DETAIL A

OBSOLETED
JAN. 2020
PCR 24140



CIRCUIT: SP3T

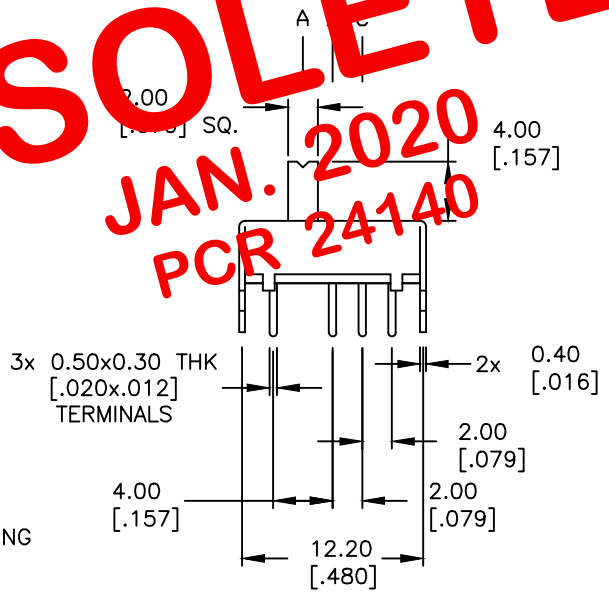

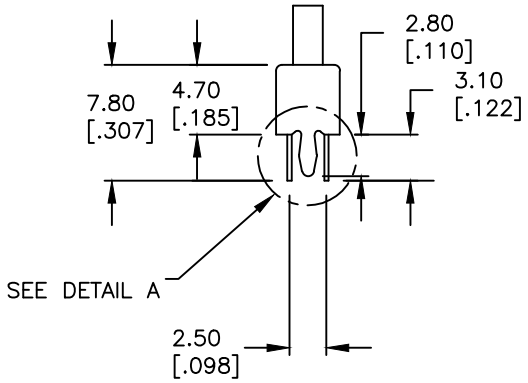

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. ▲ CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING
5. RATING: 0.3A @30V DC
6. CONTACT RESISTANCE: >20mILLI−OHMS max.
7. INSULATION RESISTANCE: 500VDC−100Mega−OHMS min.
8. WITHSTAND VOLTAGE: 500V−1minute
9. OPERATING FORCE: A−B, C−B 200±100gf
   B−A, B−C 250±150gf
10. STOKE: 2mm
11. FULL TRAVEL: 4mm
12. TIMING: NON−SHORTING

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12159	RELEASED	5/20/02	CJC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: EG 1230

SCALE	DATE	DR	DWG	REV
2:1	5/20/02	CJC	P040032	A