

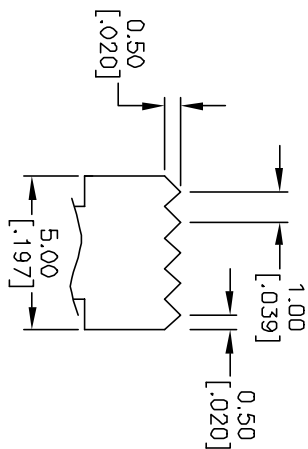


RECOMMENDED P.C.B. LAYOUT

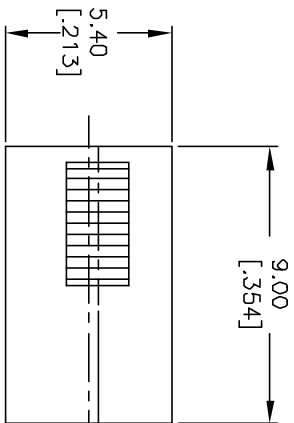

KNDB DETAIL



SCALE 4:1



SWITCH FUNCTION	
POS. 1	POS. 2
2-1,5-4	2-3,5-6

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.XX=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1A@ 30VDC
5. CONTACT RESISTANCE: 20mILLI-OHMS max.
6. INSULATION RESISTANCE: 500VDC 100Mega-OHMS min.
7. TRAVEL: 2.0mm
8. TIMING: SHORTING
9. OPERATING TEMP: -40° TO +85°

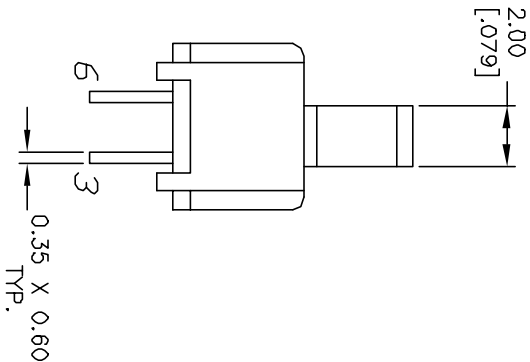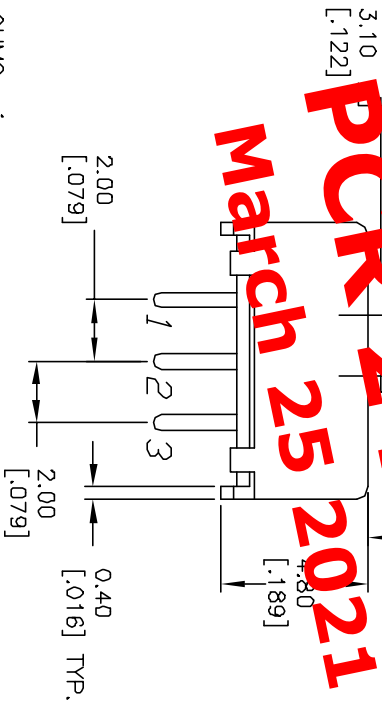

OBSOLETE
PCR 24818
March 25 2021

8. TIMING: SHORTING					E-SWITCH®						
9. OPERATING TEMP: -40° TO +85°											
					TITLE						
B	11944		ADDED NOTE 9	1/24/02						CJC	
REV.	ECN No.	DESCRIPTION			DATE	CHKD	EG2263				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											
SCALE					DATE	DR	DWG	REV			
2:1					1/24/02	CJC	P122380	B			