


▲ SWITCH FUNCTION




POS. 1	POS. 2
ON	(ON)
1-2	2-3

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 1A @ 9 VDC
- ELECTRIC LIFE: 20,000 CYCLES
- INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC
- ACTUATION FORCE: 1700 $\pm$ 700gf
- TRAVEL: 2.7mm
- CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
- DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL
- OPERATING TEMP.: -10°C to 70°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE TO BE SHIPPED BULK:
T081101 - LOCK WASHER, QTY 1
T100025 - WASHER, QTY 1
T081102 - HEX NUT, QTY 2

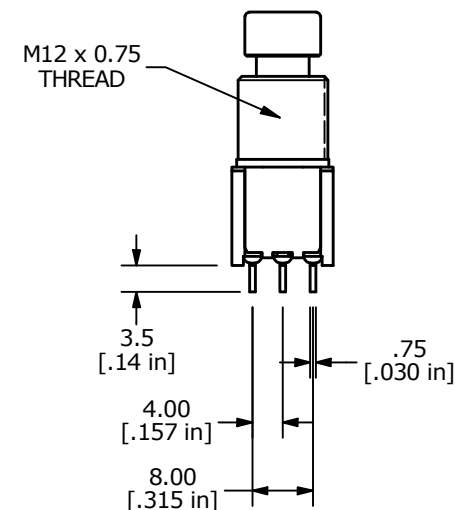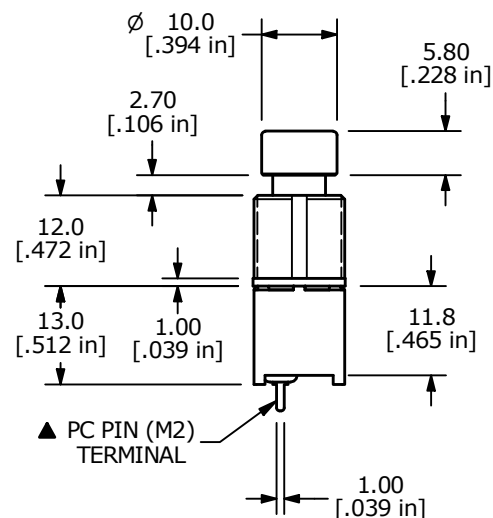

TITLE FS5700SPMT2B2M2QEH

SCALE 1:1

DATE 3/18/2021

DR MW

DWG ST790007

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED