

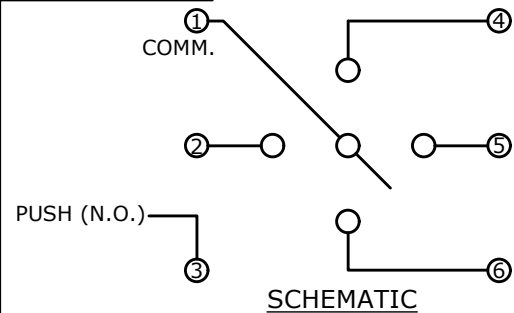

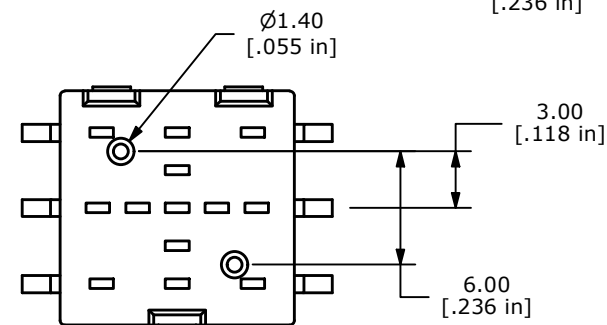
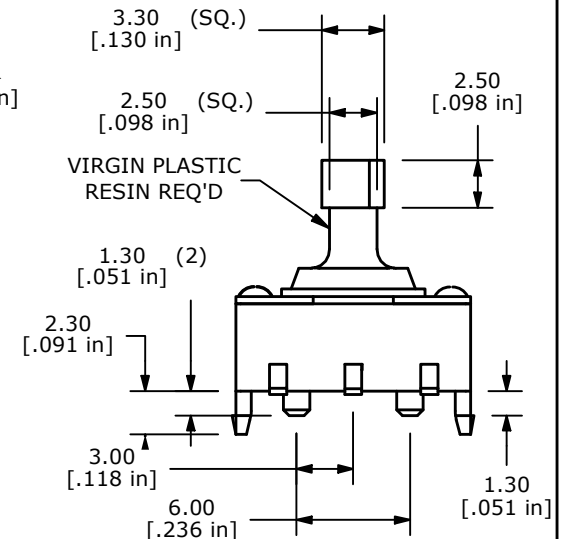


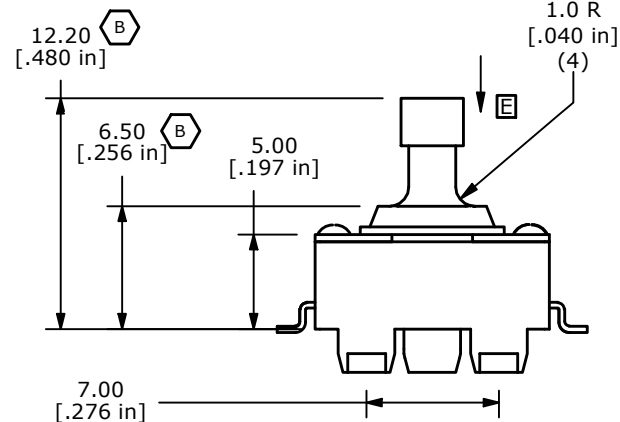

SWITCH FUNCTION	
POSITION	CONNECTED TERM. #
A	1 - 4
B	1 - 2
C	1 - 6
D	1 - 5
PUSH E	1 - 3

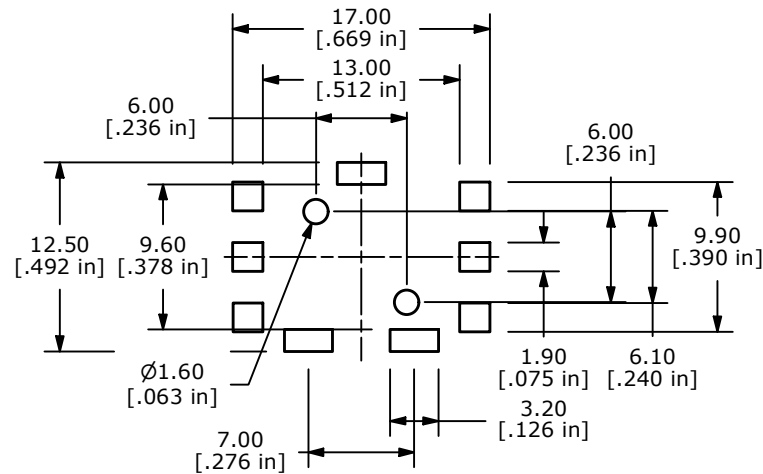

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X=±0.3
X.XX=±0.125
4. TRAVEL: LEVER 8°±2°; PUSH: 1.0mm +/- 0.2
- ▲ 5. OPERATION FORCE: LEVER=600 +/- 100 gf
PUSH=500 +/- 150 gf
6. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
7. ▲ DENOTES CRITICAL PARAMETER
8. NICKEL UNDERPLATE ³ 40 MILLIONTHS
(STATIONARY TERMINALS ONLY)
9. 2002/95/EC (ROHS) COMPLIANT



B	19723	CHANGED DIMS was 12.02 & 6.59	2/28/11	BGL
A	19050	Release For Production	5/6/10	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE JS5208HF

SCALE 2.5 : 1

DATE 5/6/2010

DR BLR

DWG P200021

REV B