
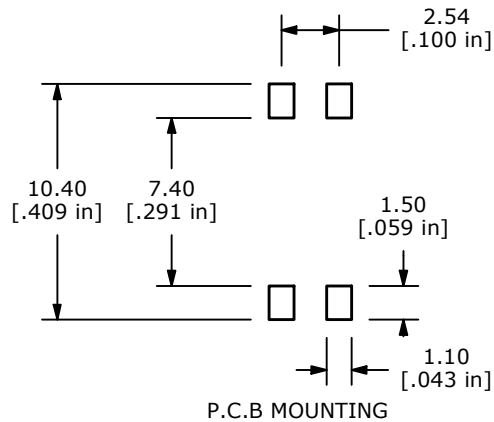
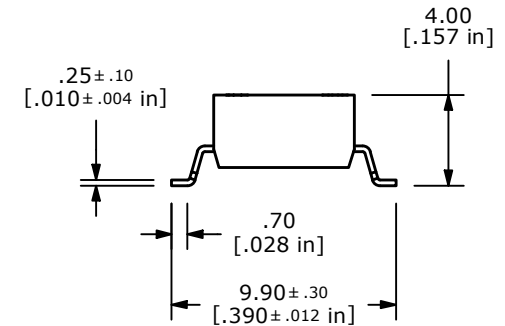




▲ CIRCUIT - 2 POSITION

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD FLASH PLATE
6. INSULATION RESISTANCE: 100 MΩ MIN. @500VDC
7. CONTACT RESISTANCE: 50 mΩ MAX INITIAL
8. OPERATING TEMP: -40°C TO +105°C
9. STORAGE TEMP: -40°C TO +105°C
10. ELECTRICAL LIFE: 1,000 CYCLES
11. MECHANICAL LIFE: 1,000 CYCLES
- ▲ 12. PACKAGE: TAPE AND REEL, WITH ALL
POLES IN THE "OFF" POSITION
13. ▲ DENOTES CRITICAL PARAMETER
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 15. OPERATING FORCE: 1000gf MAX.

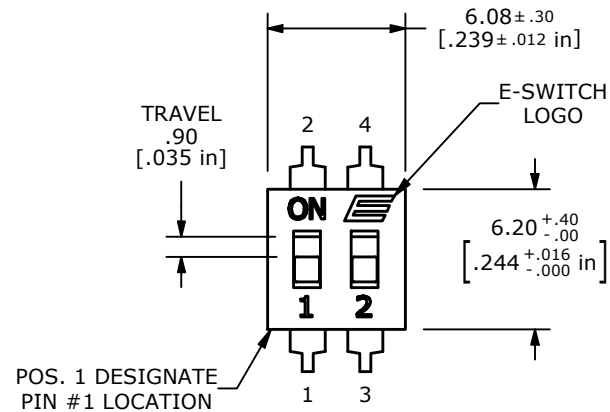

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104064	RELEASE	05/14/26	JS	TITLE KAG02SGGR				100132529
					SCALE	DATE	DR	DWG	REV
					3:1	4/16/2026	JS	P800016	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED