

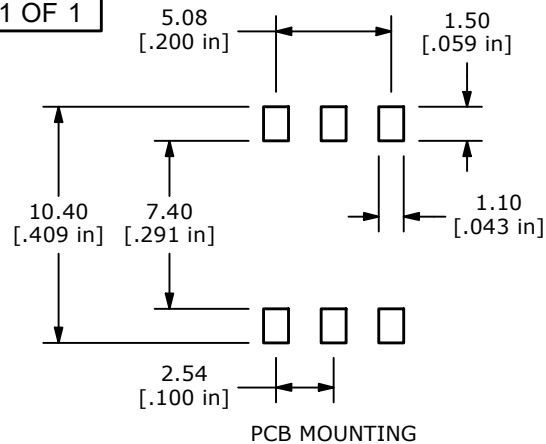
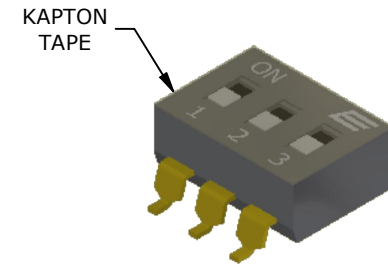
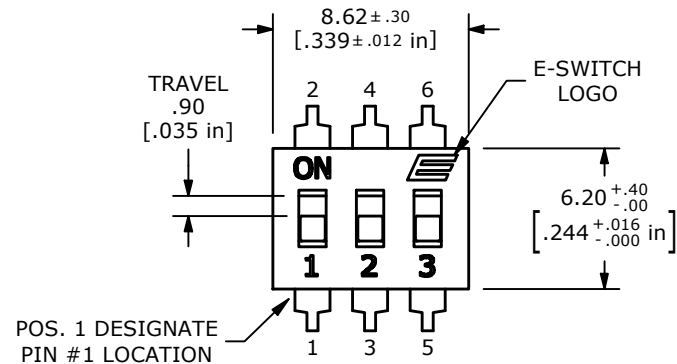


▲CIRCUIT - 3 POSITION

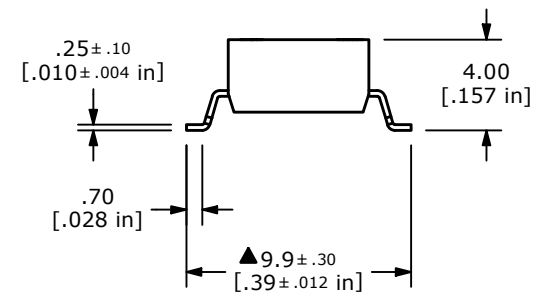

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD FLASH PLATED
6. INSULATION RESISTANCE: 100 M Ω MIN. @500VDC
7. CONTACT RESISTANCE: 50 m Ω MAX INITIAL
8. OPERATING TEMP: -40°C to +105°C
9. STORAGE TEMP: -40°C to +105°C
10. ELECTRICAL LIFE: 1000 CYCLES @ 25mA, 24VDC
11. MECHANICAL LIFE: 1000 CYCLES
- ▲ 12. PACKAGING: TAPE AND REEL WITH ALL
POLES IN THE "OFF" POSITION
13. ▲ DENOTES CRITICAL PARAMETER
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 15. OPERATING FORCE: 1000gf MAX.

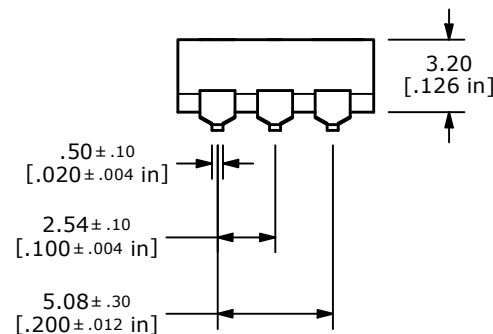

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104064	RELEASE	05/14/26	JS	TITLE KAG03TGGR				100132571
					SCALE	DATE	DR	DWG	REV
					3:1	4/21/2026	JS	P800020	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED