
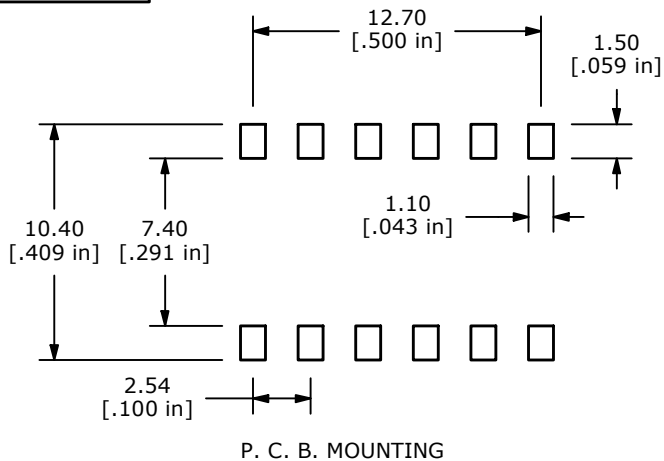
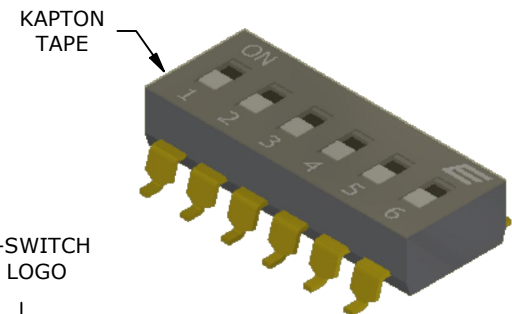


▲ CIRCUIT - 6 POSITION

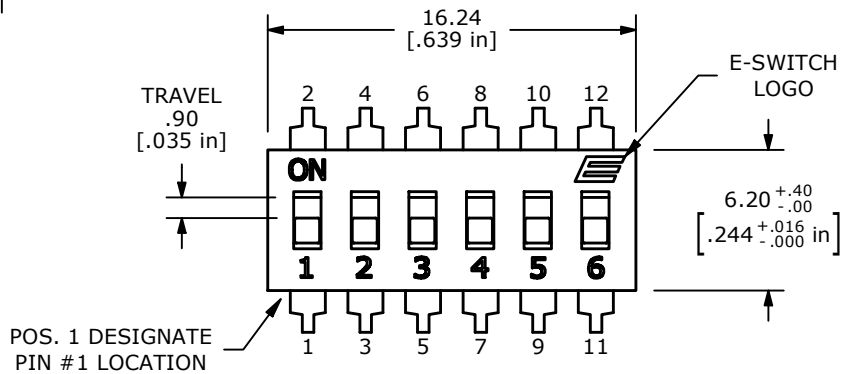

- NOTES:

1. ALL DIMENSIONS IN MM [INCH].

2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$

3. TERM. NOS. FOR REFERENCE ONLY

4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)
100mA @50VDC. (CARRY)

- ▲ 5. CONTACT/TERMINAL: GOLD FLASH PLATED

6. INSULATION RESISTANCE: 100 MΩ MIN. @500VDC

7. CONTACT RESISTANCE: 50 mΩ MAX INITIAL

8. OPERATING TEMP: -40°C TO +105°C

9. STORAGE TEMP: -40°C TO +105°C

10. ELECTRICAL LIFE: 1,000 CYCLES



11. MECHANICAL LIFE: 1,000 CYCLES

- ▲ 12. PACKAGE: TAPE AND REEL WITH ALL
POLES IN THE "OFF" POSITION

13. ▲ DENOTES CRITICAL PARAMETER

14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE

- ▲15. OPERATING FORCE: 1000gf MAX.

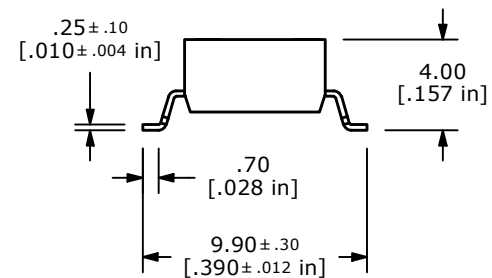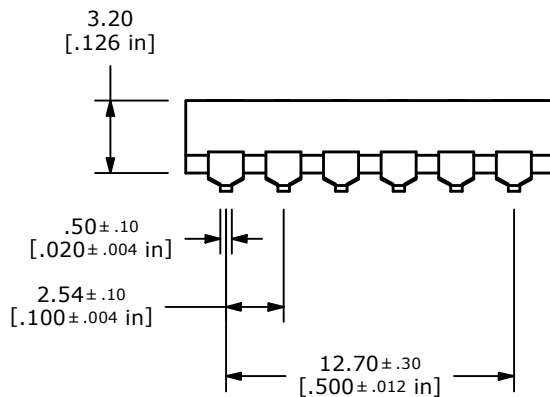

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-104075	RELEASE	05/12/26	JS						100132578
					TITLE KAG06TGGR					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					3:1	4/21/2026	JS	P800024	A	