


SHEET 1 OF 1

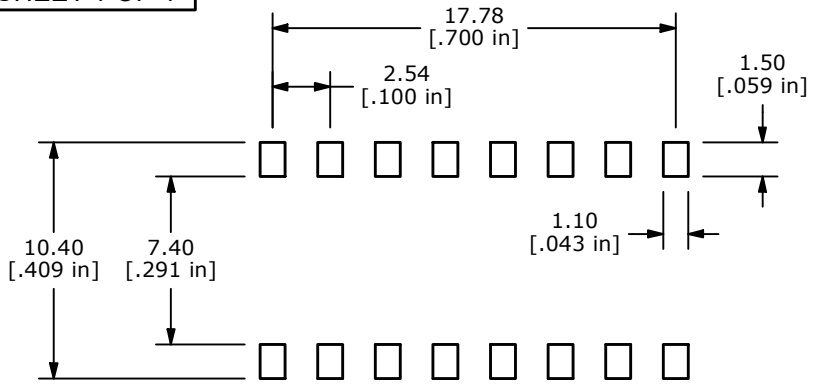



P.C.B MOUNTING

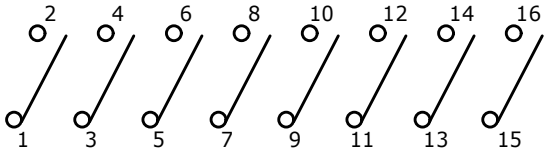

▲ CIRCUIT - 8 POSITION

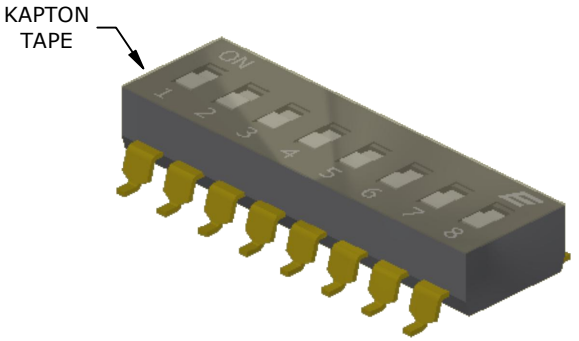

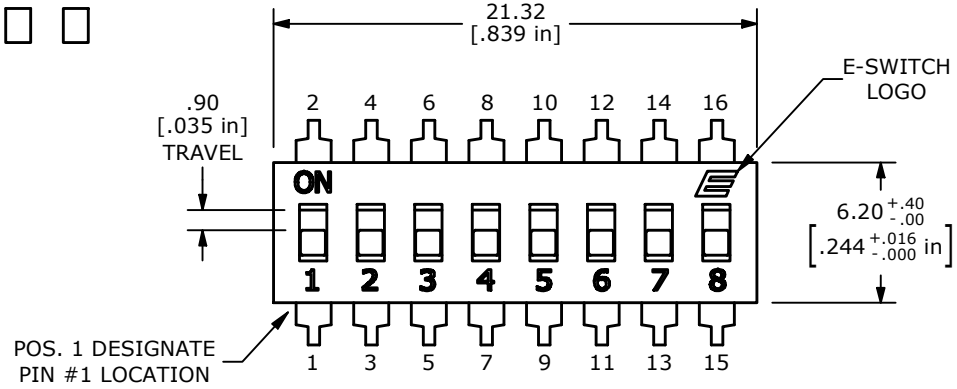

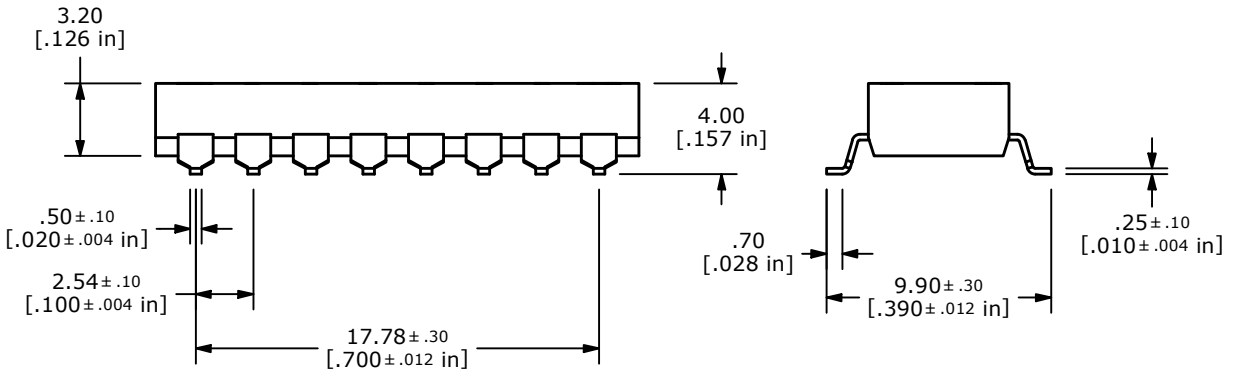

NOTES:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
   100mA @50VDC (CARRY)
▲5. CONTACT/TERMINALS: GOLD FLASH PLATED
6. INSULATION RESISTANCE: 100 MΩ MIN. @ 500VDC
7. CONTACT RESISTANCE: 50 mΩ MAX INITIAL
8. OPERATING TEMP: -40˚C to +105˚C
9. STORAGE TEMP: -40˚C to +105˚C
10. ELECTRICAL LIFE: 1,000 CYCLES
11. MECHANICAL LIFE: 1,000 CYCLES
▲12. PACKAGE: TUBE, WITH ALL POLES IN THE "OFF" POSITION
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
▲15. OPERATING FORCE: 1000gf MAX.

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-104075	RELEASE	05/12/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

OBJECT ID 100132580

TITLE KAG08TGGT

SCALE	DATE	DR	DWG	REV
3:1	4/21/2026	JS	P800025	A