


SHEET 1 OF 1

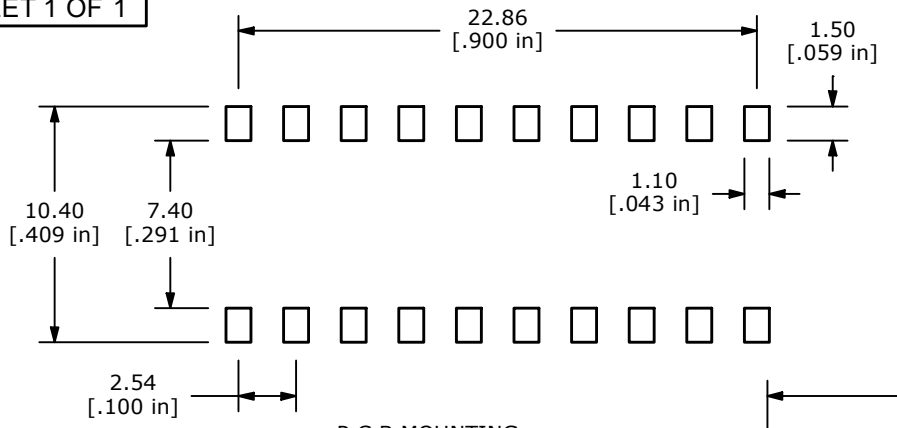


P.C.B MOUNTING

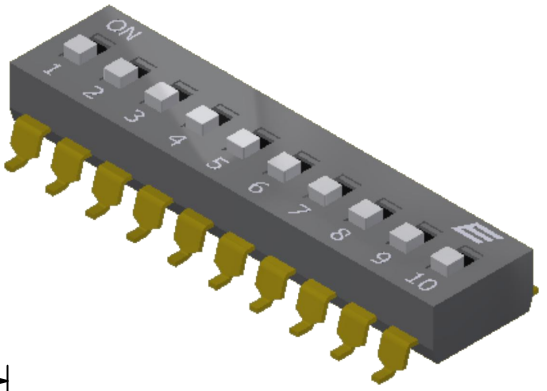


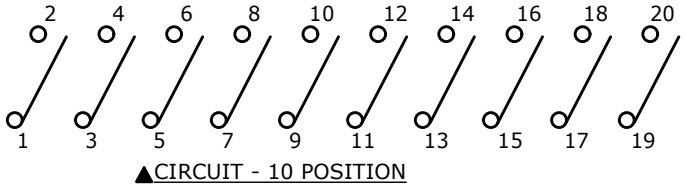

▲CIRCUIT - 10 POSITION

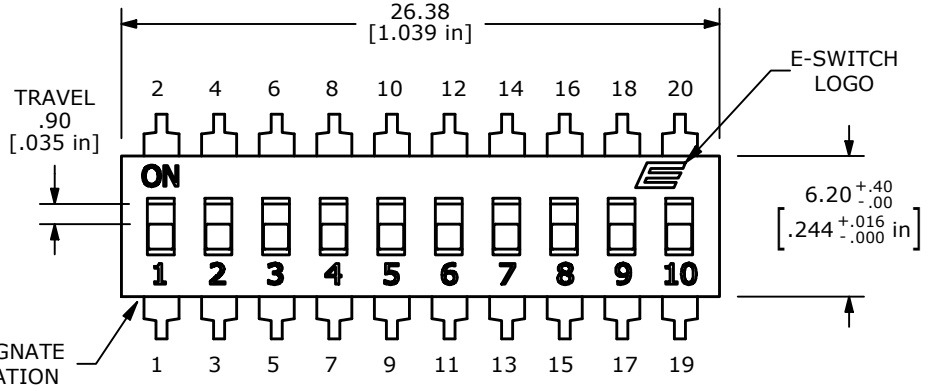

NOTES:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.(SWITCH)
   100mA @50VDC.(CARRY)
▲5. TERMINALS: GOLD FLASH PLATED.
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC.
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL.
8. OPERATING TEMP: -40˚C TO +105˚C.
9. STORAGE TEMP: -40˚C TO +105˚C.
10. ELECTRICAL LIFE: 1,000 CYCLES.
11. MECHANICAL LIFE: 1,000 CYCLES
▲12. PACKAGE: TAPE AND REEL WITH ALL
    POLES IN THE "OFF" POSITION.
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE.
▲15. OPERATING FORCE: 1000 gf MAX.

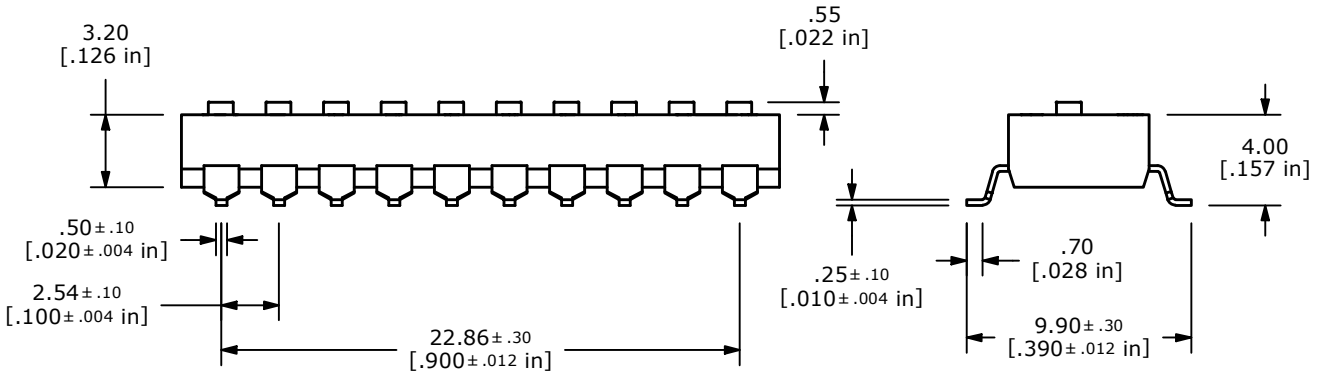

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-104075	RELEASE	05/12/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100132582

TITLE KAG10LGGR

SCALE	DATE	DR	DWG	REV
3:1	4/21/2026	JS	P800026	A