
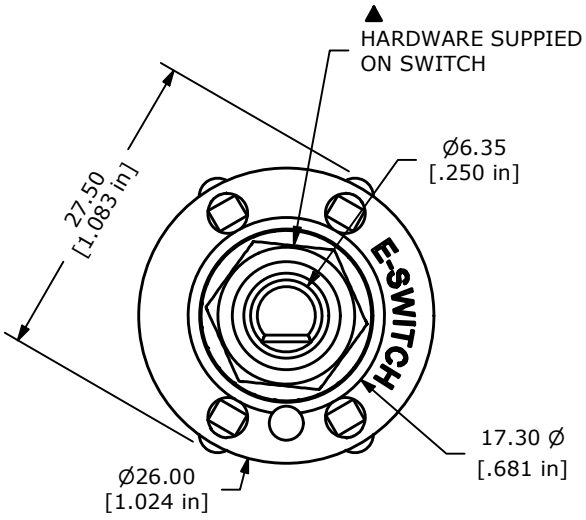
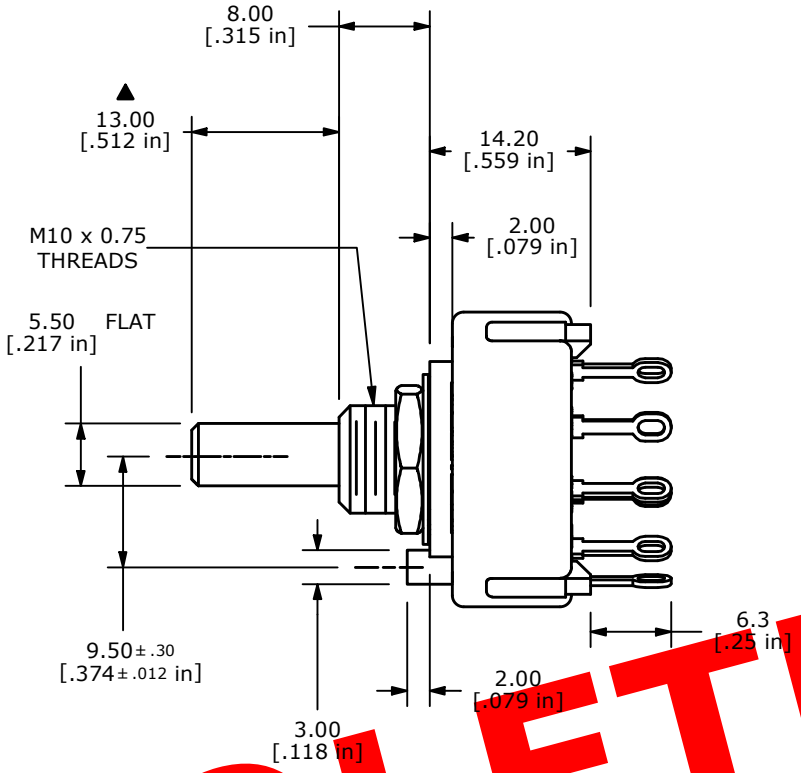

SHEET 1 OF 1





CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING



ISOMETERIC



NOTE:
1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
   350MILLIAMP, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 0.3A @ 125VAC
7. CONTACT RESISTANCE: 50 Mille-OHM Max.
8. ROTATIONAL TORQUE: 0.8 ± 0.3 Kg-CM
9. OPERATING TEMP: -30˚C TO 85˚C
▲10. CIRCUIT SP: 5 POSITION 30˚ INDEX.
11. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL.
12. WITHSTAND VOLTAGE: 500VAC FOR 1 MINUTE.
▲13 HARDWARE SUPPLIED ON SWITCH:
   LOCKWASHER, HEXNUT, STOP RING
14. ▲DENOTES CRITICAL PARAMETER.
15. 2002/95/EC (ROHS) COMPLIANT

OBSOLETE
February 2023
ECO-101581

| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| A | 18021 | RELEASED FOR PRODUCTION | 3/18/08 | BLR |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000012678

TITLE KC15A13.002NLS

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 3:2 | 3/19/2008 | BLR | G527967 | A |