


SHEET 1 OF 1




CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

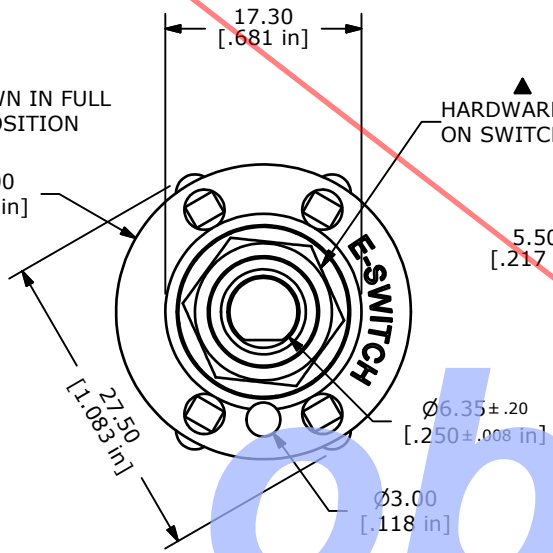


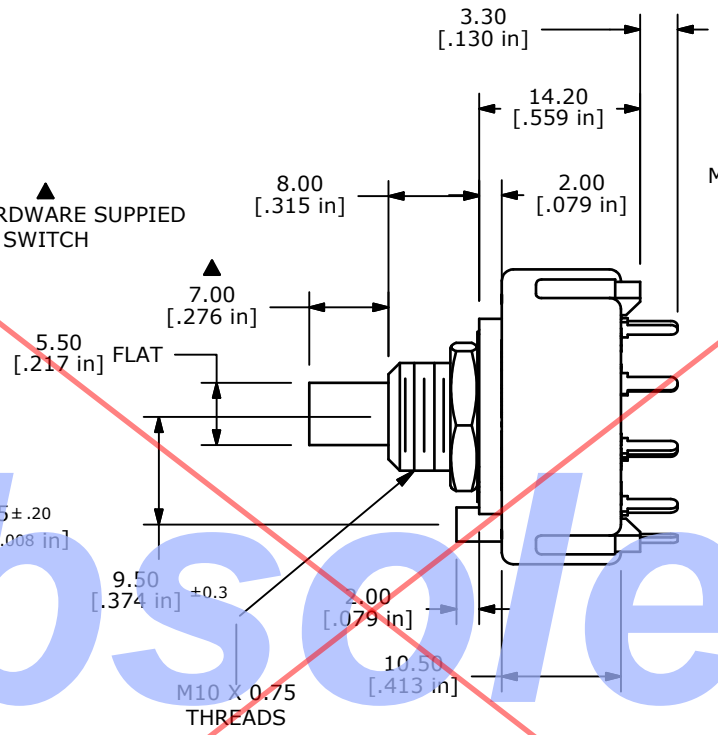


ISOMETRIC

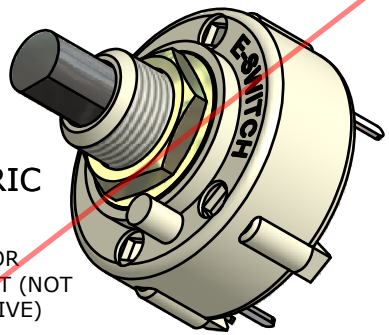

PIN 9 IS ONLY FOR
MECHANICAL SUPPORT (NOT
ELECTRICALLY ACTIVE)



NOTE:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 0.3A @ 125VAC
6. CONTACT RATING: (NON-SWITCHING) 5A
7. OPERATING FORCE 800± 300gm-cm
8. OPERATING TEMP: -30˚C TO 85˚C
▲9. CIRCUIT SP: 5 POSITION 30˚ INDEX.
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
▲11. HARDWARE SUPPLIED ON SWITCH:
(1) LOCKWASHER, (1) HEXNUT, AND (1) STOP RING. (B)
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

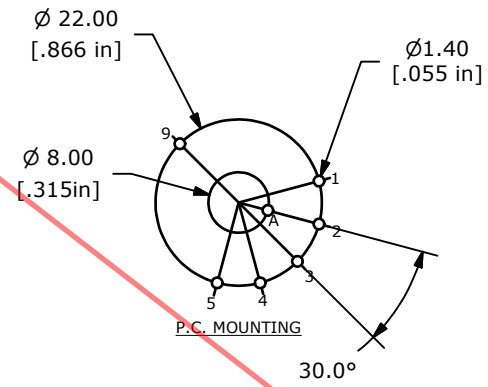

obsolete

REV	PCR NO	DESCRIPTION	DATE	BY
B	19363	UPDATED NOTES	10/19/10	BMA
A	18229	RELEASED FOR PRODUCTION	9/02/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH | LAMB INDUSTRIES

TITLE KC15A7.002NPS

SCALE	DATE	DR	DWG	REV
1.5:1	9/2/2008	BLR	G527969	B