


SHEET 1 OF 1




CONTACT CONFIGURATION
TIMING (MBB) SHORTING




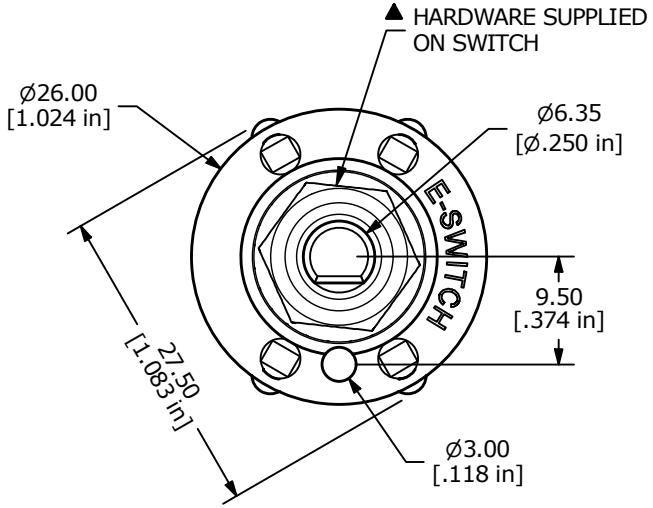

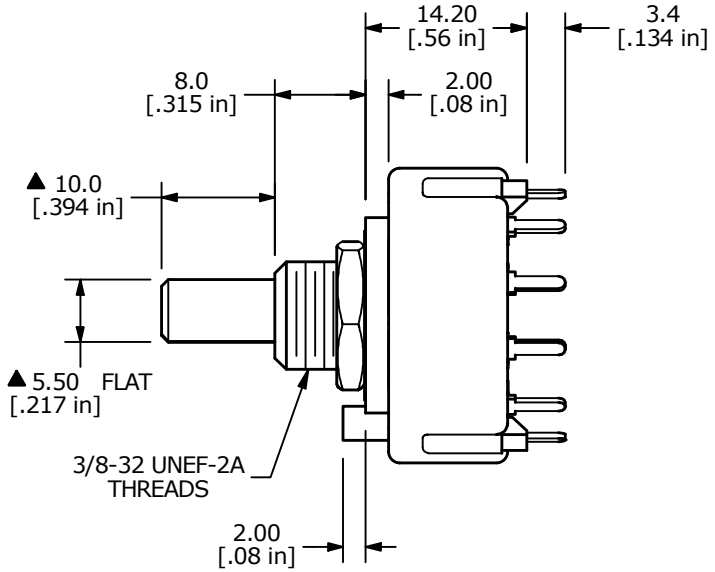



NOTE:
1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT MATERIAL: GOLD
5. CONTACT RATING: 150mA, 250VAC/DC
   350mA, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE: .8 ± .3kg-cm
8. OPERATING TEMP: -30˚C to 85˚C
▲ 9. CIRCUIT 2P: 6 POSITION 30˚ INDEX.
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL
▲ 11. HARDWARE SUPPLIED ON SWITCH: LOCKWASHER, HEXNUT
12. ▲ DENOTES CRITICAL PARAMETER.

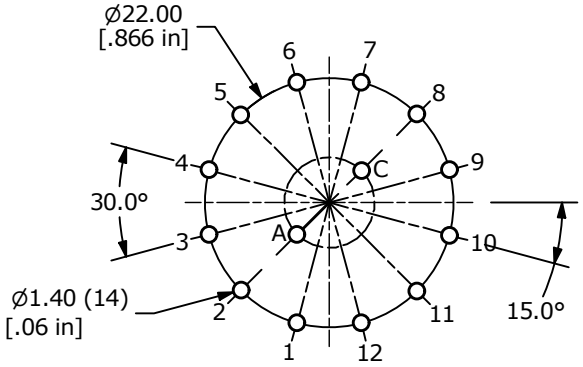

P.C.B MOUNTING LAYOUT

REV	PCR NO	DESCRIPTION	DATE	BY
A	24820	RELEASE	3/28/21	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE KC26A10.001SPF

SCALE	DATE	DR	DWG	REV
3/2	3/28/2021	MW	G510620	A