



SHEET 1 OF 1





CONTACT CONFIGURATION
TIMING (MBB) SHORTING

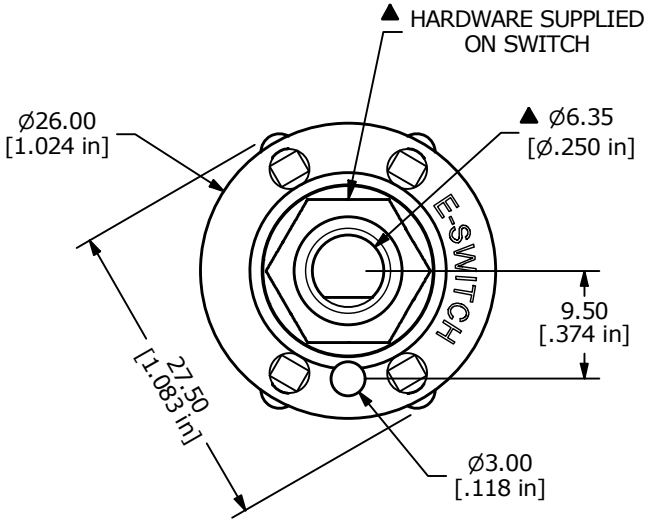


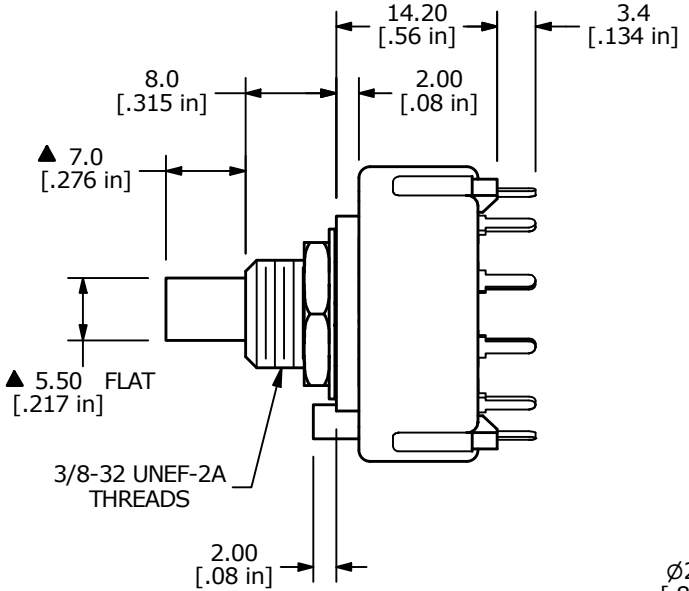

NOTE:
1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
▲4. CONTACT MATERIAL: GOLD
5. CONTACT RATING: 150mA, 250VAC/DC
   350mA, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE: .8 ± .3kg-cm
8. OPERATING TEMP: -30°C to 85°C
▲9. CIRCUIT SP: 12 POSITION 30° INDEX.
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
▲11. HARDWARE SUPPLIED ON SWITCH: LOCKWASHER, HEXNUT
12. ▲ DENOTES CRITICAL PARAMETER.




P.C.B MOUNTING LAYOUT
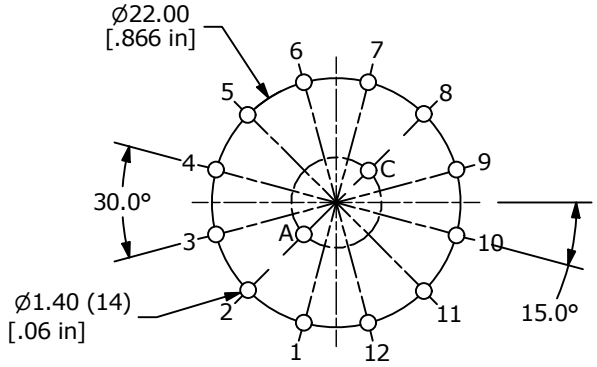
| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| B | ECO-100327 | update print and remove chamfer from Actuator | 09/02/21 | MW |
| | | | | |
| | | | | |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100096605

TITLE KC26A7.001SPF

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 3:2 | 3/28/2021 | MW | G510619 | B |