


SHEET OF

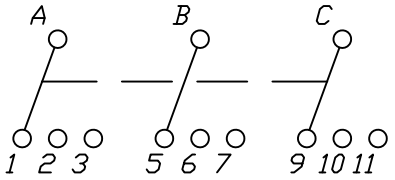



CONTACT CONFIGURATION

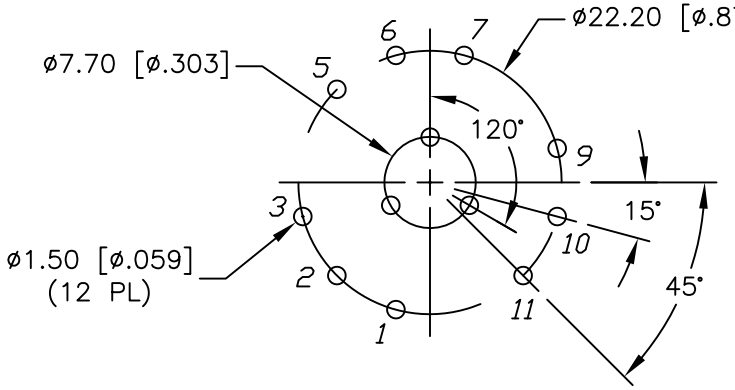

RECOMMENDED PCB LAYOUT

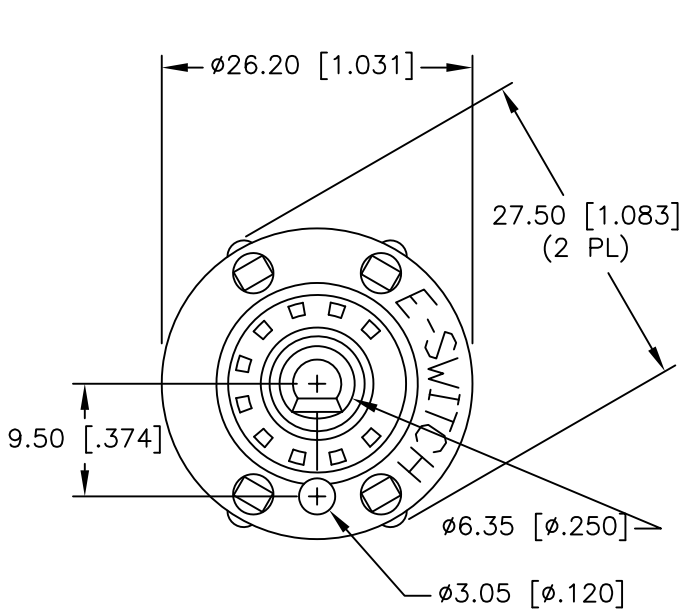

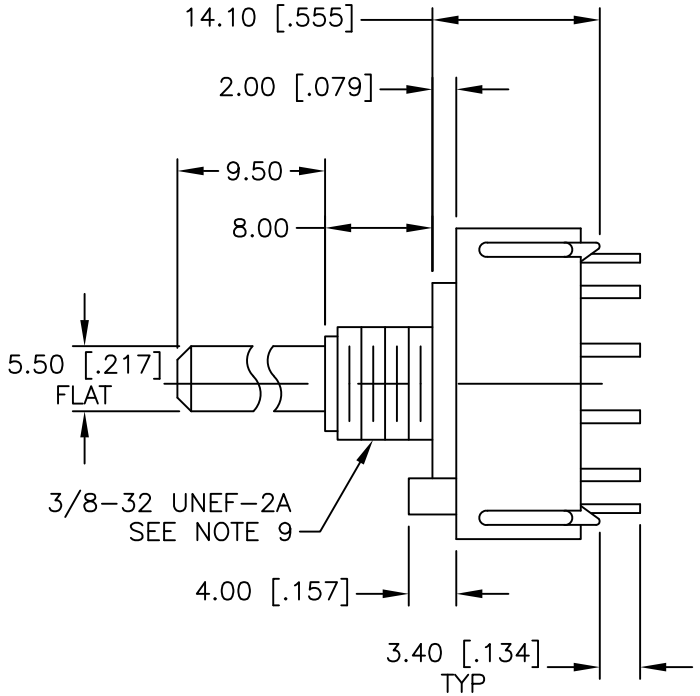

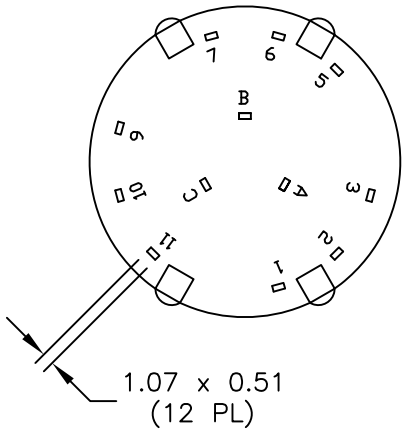

NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
   350mA, 110V AC/DC
5. CONTACT RATING (NON–SWITCHING) 5A
6. OPERATING FORCE: 425±100 CM/STANDARD
7. OPERATING TEMP: –30° to 85°C
8. ▲ CIRCUIT 3P: 3 POSITIONS, 30° INDEX.
9. DIELECTRIC STRENGTH 1000V RMS min.@ SEA LEVEL
10. ▲ DESIGNATE MAJOR DIMENSIONS
11. LOCK NUT AND WASHER NOT SHOWN.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11252	RELEASED FOR PRODUCTION	05/09/01	RJC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: KC-33-E-01-N-P-S

SCALE	DATE	DR	DWG	REV
1.5:1	05/09/01	RJC	G510263	A