



SHEET 1 OF 1



CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

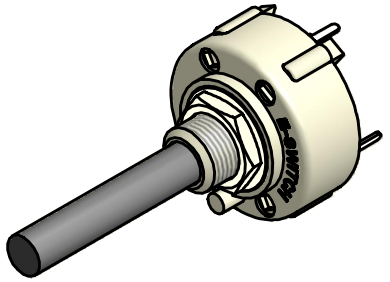

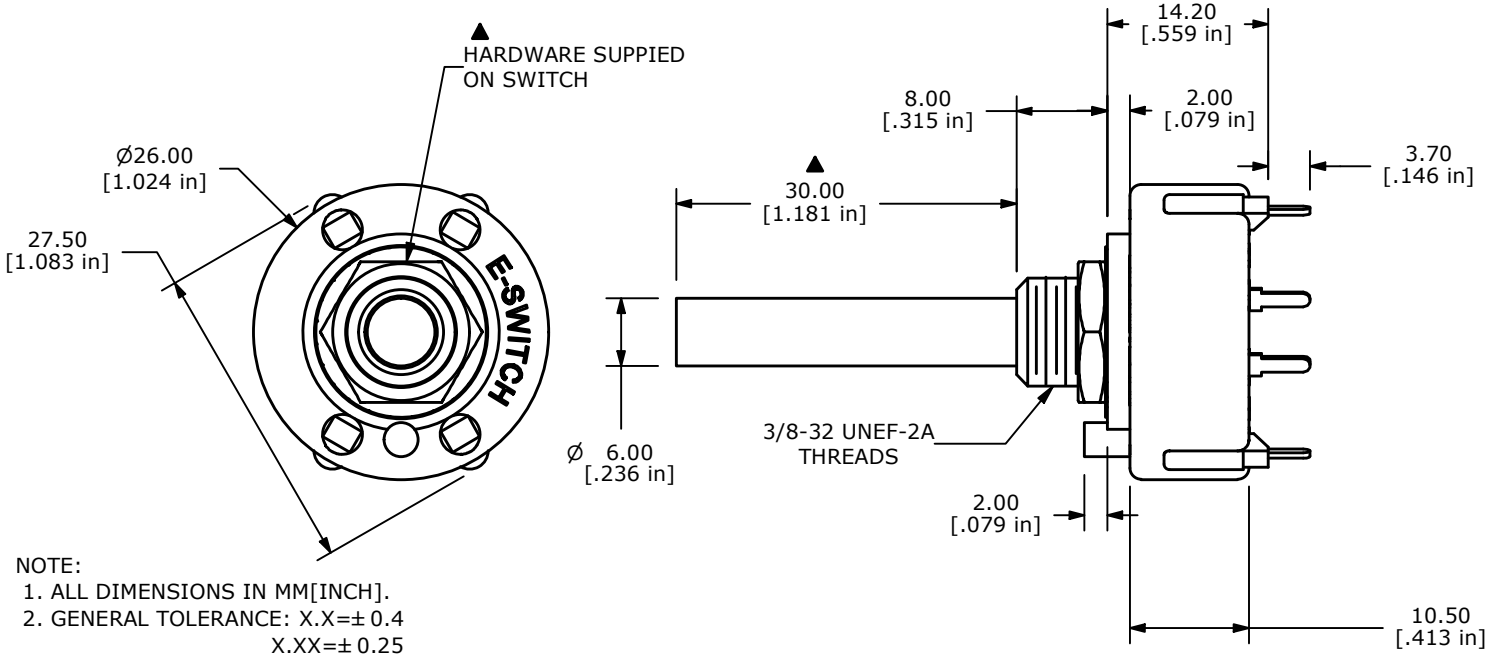



NOTE:
1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 300 mA @ 125 VAC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE: 800± 300 gm-cm
8. OPERATING TEMP: -30˚C TO 85˚C
▲9. CIRCUIT SP: 4 POSITION 90˚ INDEX.
10. DIELECTRIC STRENGTH: 500 VAC FOR 1 MIN.
▲11. HARDWARE SUPPLIED ON SWITCH:
   LOCKWASHER, HEXNUT, STOP RING
12. ▲DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	18153	RELEASED FOR PRODUCTION	6/26/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE KC58B30.001NPS

SCALE	DATE	DR	DWG	REV
1.5:1	6/26/2008	BLR	G511016	A