

SHEET 1 OF 1

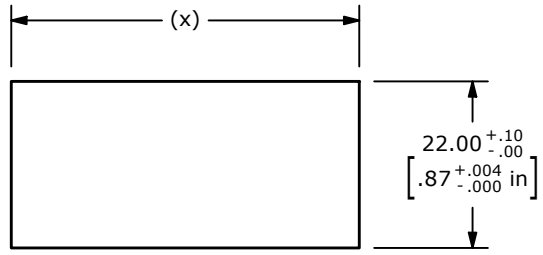



PANEL CUTOUT


PANEL THICKNESS	(x)
1.0 - 1.5	46.0 +0.1/-0
1.5 - 2.5	46.4 +0.1/-0





CIRCUIT: DPST

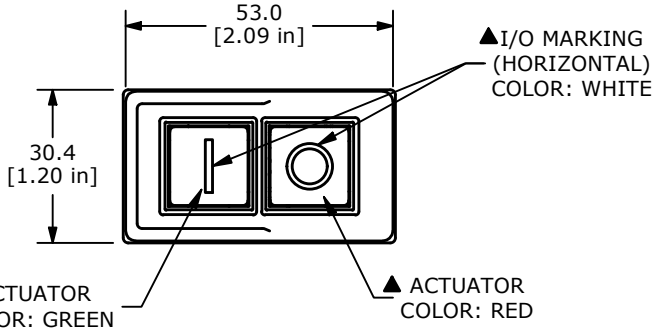

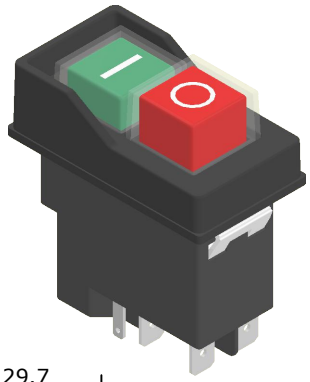

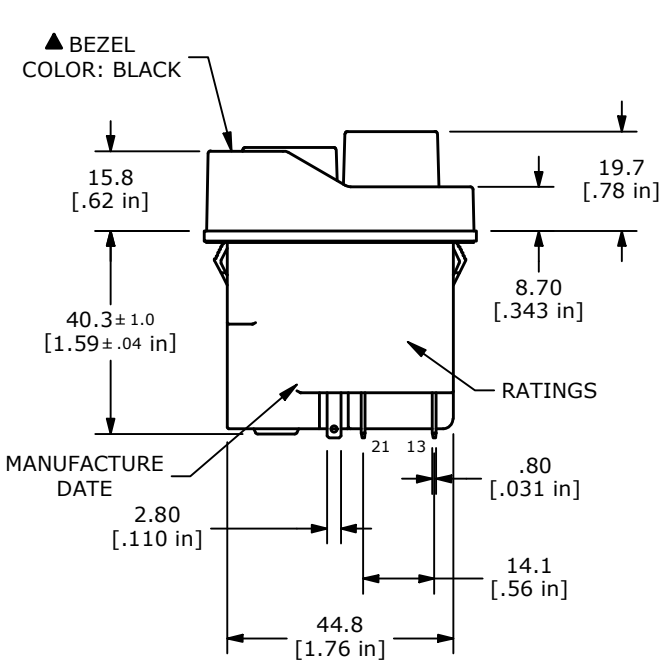

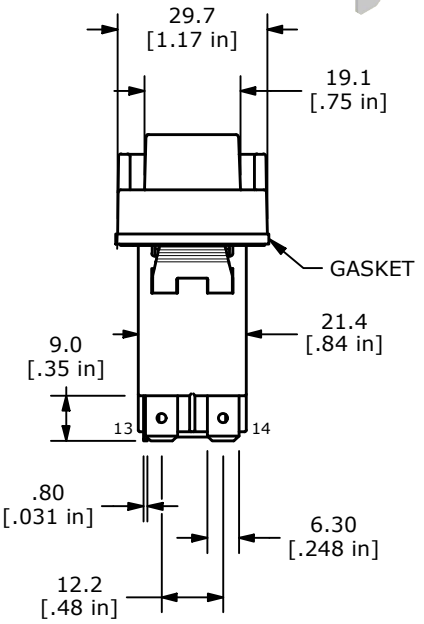

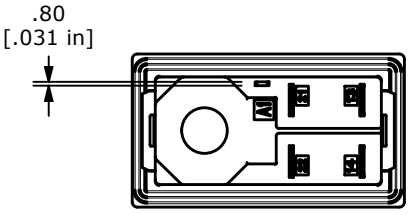

NOTE:
1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
▲5. CONTACT RATINGS:
   20(20)A@250VAC 1E5 T85/55 UL(UL61058)
   20(20)A@250VAC IE5 T85/55 TUV(EN61058)
   250VAC 50/60Hz
6. CALIBRATION VOLTAGE:
   USE: 220 - 240V @ 50/60Hz
   RELEASE: 60V - 180V
7. ELECTRICAL LIFE 100,000 CYCLES
8. INSULATION RESISTANCE: 10MΩ MIN. @ 500VDC
9. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
10. OPERATING TEMPERATURE: 0°C TO 85°C (HOUSING)
    0°C TO 55°C (ACTUATOR)
11 STORAGE TEMPERATURE: -25°C TO 85°C
12 INGRESS PROTECTION: IP55 TO PANEL
13. CONTACT RESISTANCE: 50 mΩ MAX. @ 50VAC INITIAL
14. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103248	UPDATE RATINGS	03/27/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100128812

TITLE KJE32232211

SCALE	DATE	DR	DWG	REV
2:3	11/12/2024	JS	34-KJE32232211	B