

SHEET 1 OF 1





RECOMMENDED PANEL CUTOUT

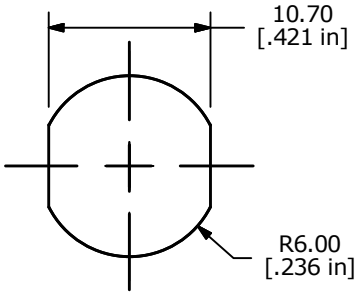


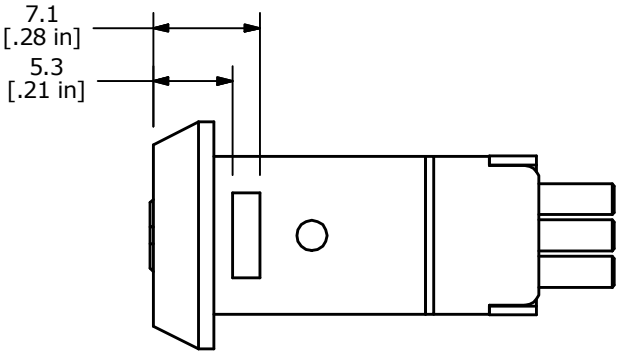


SHOWN WITH
PROVIDED HEX NUT

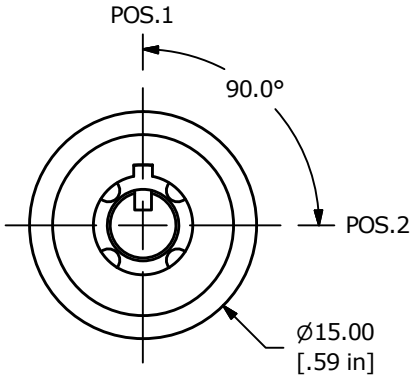

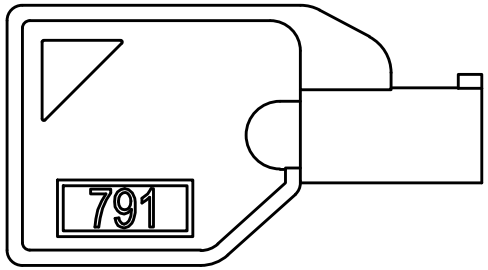


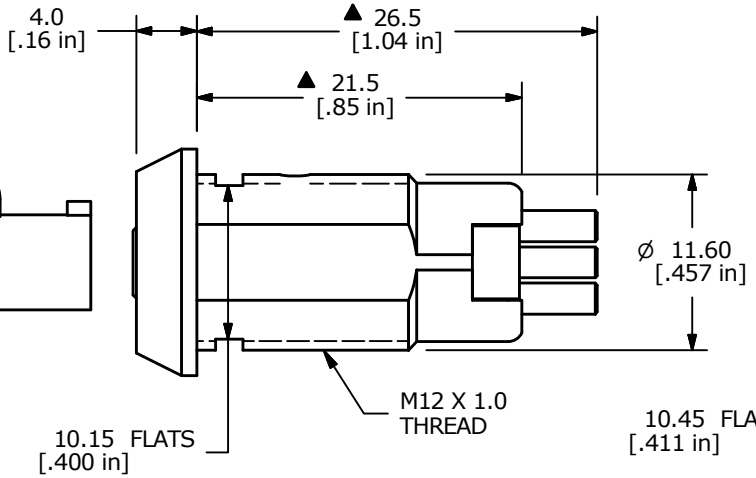



NOTE:
1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATINGS: 1A @ 125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 10mΩ MAX.
6. INSULATION RESISTANCE: 200MΩ MIN.
7. DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
8. ▲ DENOTES CRITICAL PARAMETER
9. MATERIALS:
   HOUSING: ZINC ALLOY CAST
   CYLINDER: ZINC ALLOY W/ CHROME PLATING
   TERMINAL AND CONTACTS: SILVER PLATED
   KEY: TUBULAR - ZINC ALLOY WITH CHROME PLATING
10. PANEL THICKNESS: 10MM MAX.
▲ 11. KEYCODE: 791 (QTY. 2)

LEGEND
◉ = KEY PULL POSSIBLE IN THESE POSITIONS
● = DETENT POSITIONS



SWITCH FUNCTION	
CONNECTED TERMINAL #	
POS.1	POS.2
ON	ON
1-2	3-4

▲ CIRCUIT: SPDT (90° INDEXING) CONTACT CONFIGURATION

REV	PCR NO	DESCRIPTION	DATE	BY
A	22250	NEW RELEASE	4/6/16	MJR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE KO103C-791

SCALE	DATE	DR	DWG	REV
2:1	3/24/2016	MJR	K100401	A