




SHEET 1 OF 1

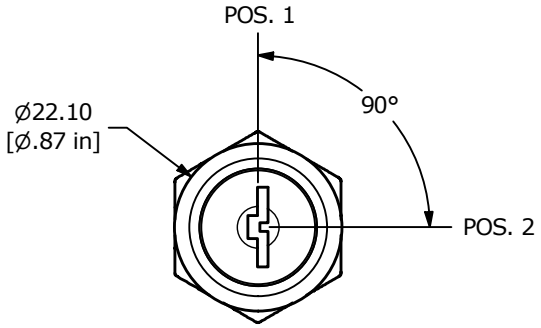

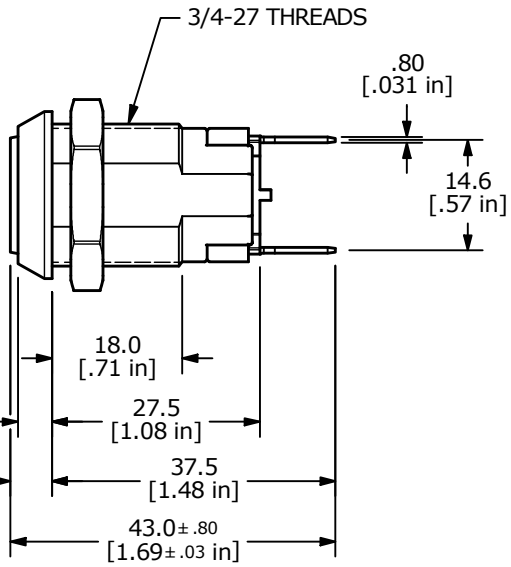


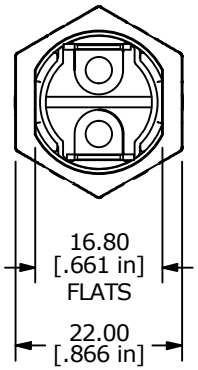






RECOMMENDED PANEL CUTOUT

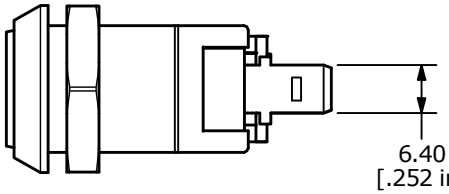



CIRCUIT: SPDT
CONTACT CONFIGURATION
90° INDEXING

SWITCH FUNCTION	
POS 1	POS 2
↑	→
OFF	1-2

LEGEND

◉ = INDICATES KEY PULL POSSIBLE

● = DETENT POSITION

NOTES:
1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: x.x = ± 0.4
   x.xx = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. RATING: 4A @ 125VAC, 2A @ 250VAC
5. CONTACT RESISTANCE: 20milli-OHMS
6. DIELECTRIC STRENGTH: 1500 VAC-1Minute
7. MATERIALS:
   HOUSING: ZINC ALLOY DIE CAST
   CYLINDER: ZINC ALLOY W/CHROME PLATING
   TERMINAL AND CONTACTS: SILVER PLATED
   KEYS (2) KEY CODE 2007: DOUBLE BITTED
8. ▲ DENOTES CRITICAL PARAMETER.
9. PACKAGING: KEYS, HARDWARE AND KEYLOCK ARE BAGGED/SHIPPED TOGETHER AS A COMPLETE LOCKSET

REV	ECO NO	DESCRIPTION	DATE	BY
D	ECO-101481	update length	01/05/23	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000015429

TITLE KO128G2007

SCALE	DATE	DR	DWG	REV
1:1	10/17/2001	CJB	K200204	D