


SHEET OF





RECOMMENDED PANEL LAYOUT

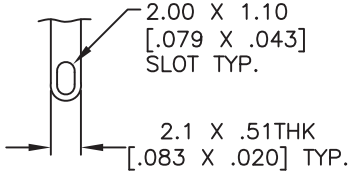

TERMINAL DETAIL
SCALE 2X

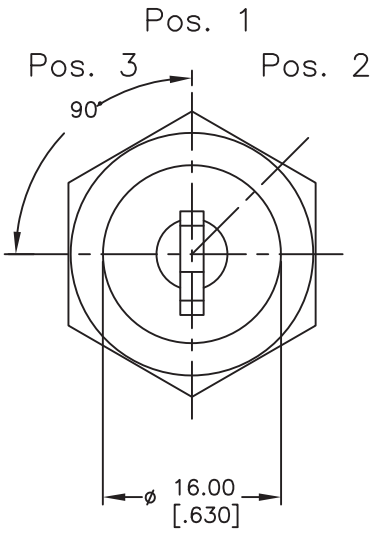


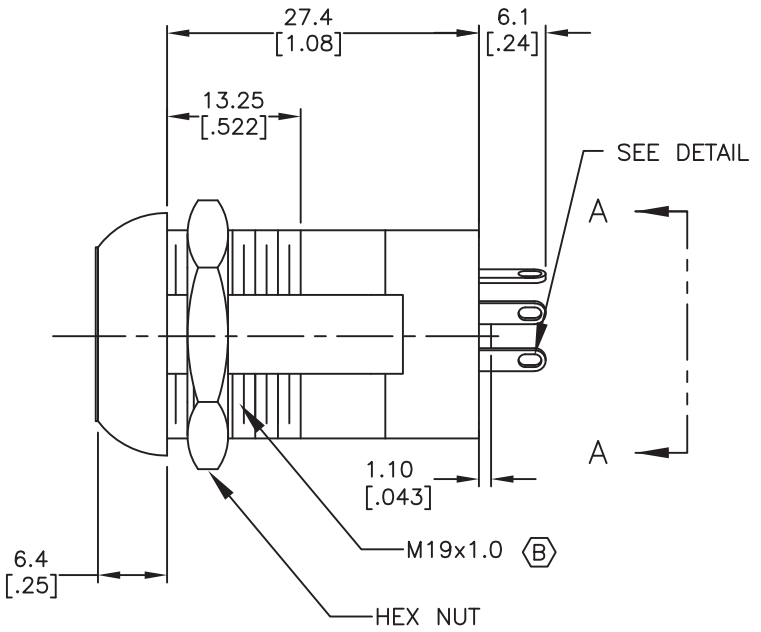

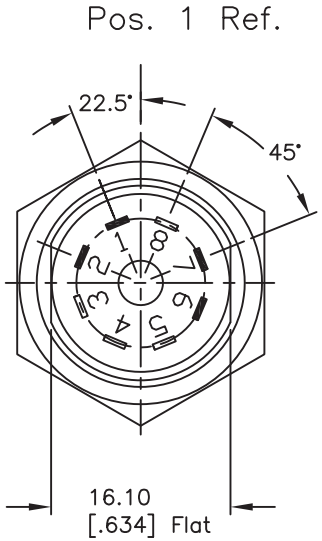

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1KV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make–and–break cycles at full load.
7. MATERIALS:
   - CONTACTS: Silver Plated CU (Q Contact material)
   - TERMINALS: Silver Plated Cu (Q Contact material)
   - MOUNTING NUT: Nickel Plated zinc alloy
   - CONTACT SPRING: Piano Wire
   - KEYS: (QTY. 2) Brass with code no. A126
   - LOCK: Bright NI plated zinc alloy with NI facing
   - TUMBLER Mechanism: 4–disc tumbler cylinder.



CIRCUIT: SP (45°/90 INDEXING)
CONTACT CONFIGURATION

SWITCH FUNCTION		
CONNECTED TERMINAL #		
POS. 1	POS. 2	POS. 3
7-1	1-2	7-6

LEGEND

- ● =Detent Positions (45°)
- ◉ =Key pull possible in these positions
- ▲ =MOMENTARY POS.

OBJECT ID: 000015433

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	102355	UPDATE HSG	11/06/23	JS
B	19509	CHANGED THREAD DESCRIPTION	12/09/10	BGL
A	11566	RELEASE FOR PRODUCTION	10/4/01	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: K0129B-A126

SCALE	DATE	DR	DWG	REV
1:1.5	10/4/01	CB	K200208	C