

SHEET 1 OF 1


▲ Parts List

| ITEM | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|
| 1 | 1 | F060621 | LAKOAV11 BODY |
| B 2 | 1 | F060251 | 25 MM BLUE LENS SUB-ASSY (OPAQUE) |
| 3 | 1 | F051705 | 30MM FLUSH MOUNT RETAINER |
| 4 | 1 | F051704 | 30MM FLUSH MOUNT BEZEL |
| 5 | 1 | Z000006 | LED BLUE 12V (WITH GROOVE BASE) DIGI-KEY #L1121-ND |

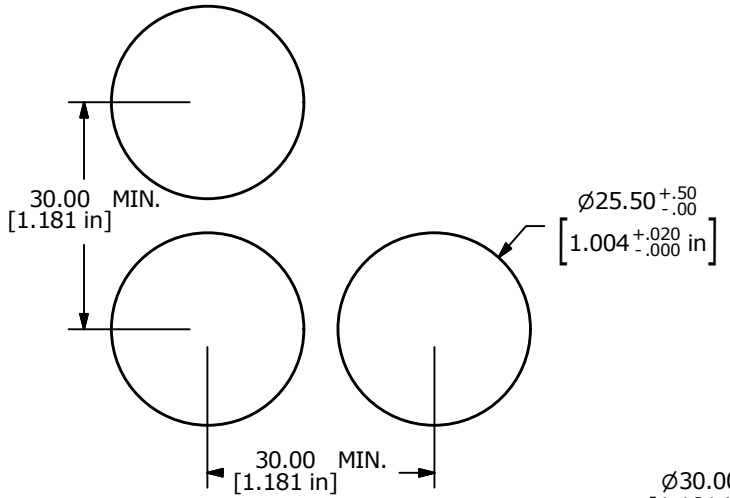

RECOMMEND PANEL MOUNTING

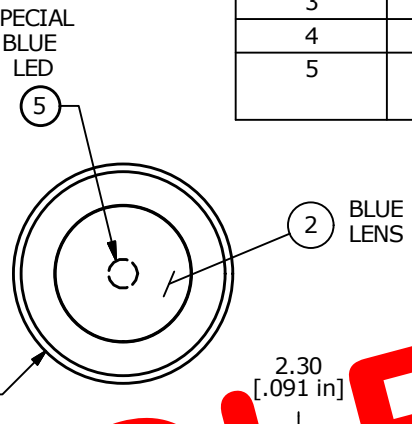


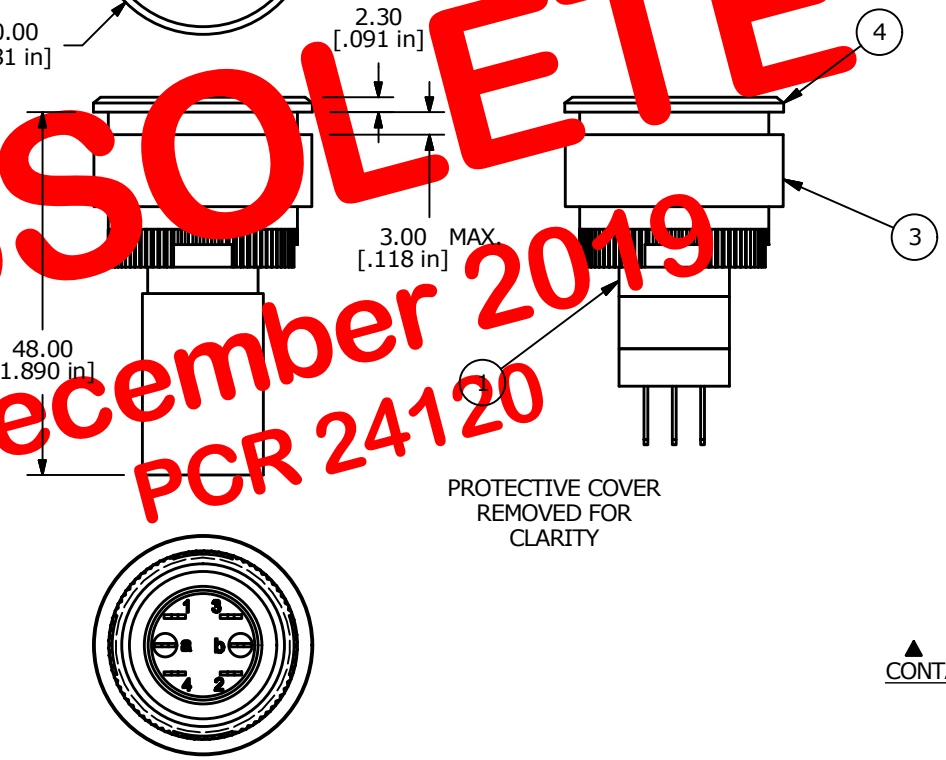




ISOMETRIC



▲ SPDT
CONTACT CONFIGURATION

OBSOLETE
December 2019
PCR 24120

NOTES:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: 0.0= 0.4
   0.00= 0.25
3. TERM. NOS. FOR REF. ONLY.
▲ 4. RATING: 5A @250VAC
   8A @125VAC
   0.2A @250VDC
   6A @24VDC
5. INSULATION: 1,000 MΩ MIN.
6. DIELETRIC STRENGTH: 2000V FOR 1 MIN.
7. SEALED TO IP65.
8. TRAVEL: 3.0MM FULL TRAVEL, 2.0MM LATCH
9. ELECTRICAL LIFE: >50,000 CYCLES
10. OPERATING TEMP: -25C TO +55C
11. PANEL THICKNESS: 0.5MM TO 3.0MM
▲ 12. LAMP: BLUE LED
13. ▲DENOTES CRITICAL PARAMETER.
14. PACKAGE: BOX/20 PCS PER.
15. 2002/95/EC (ROHS) COMPLIANT

| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| B | 18353 | PARTS LIST CHANGED FOR LENS NUMBER | 1/5/09 | BLR |
| A | 18325 | RELEASE FOR PRODUCTION | 12/2/08 | BLR |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH™

TITLE LAKOAV31BBLU

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 1:1 | 1/5/2009 | BLR | XF0776A | B |