

SHEET 1 OF 1

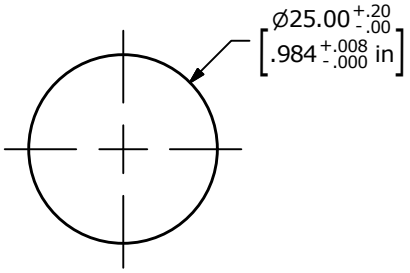


PANEL MOUNTING





▲ SPDT
CONTACT CONFIGURATION
FUNCTION: OFF-ON


▲ Parts List


ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060602	LASEEV11
2	1		GREEN LENS
3	1	F051705	V3 FLUSH MOUNT RETAINER
4	1	F051704	V3 FLUSH MOUNT BEZEL
5	1	F050419	12VDC GREEN LED

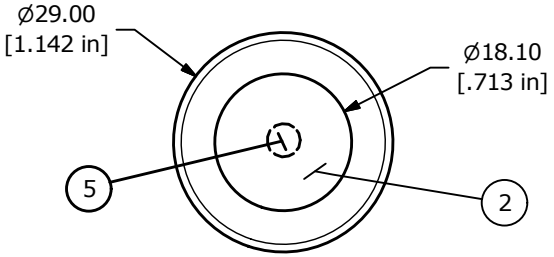



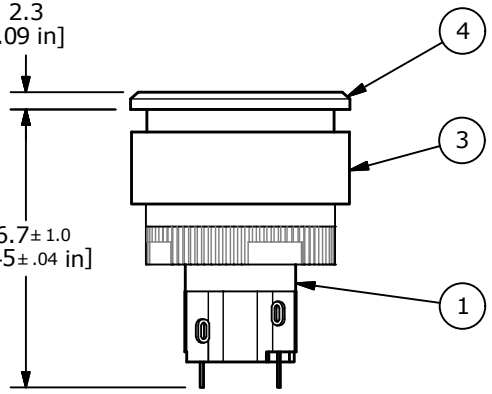

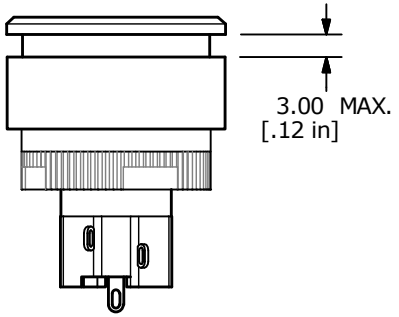



NOTES:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: x.x = ± 0.4
   x.xx = ± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
4. RATING: 5A @250VAC
   8A @125VAC
   0.2A @250VDC
   6A @24VDC
5. INSULATION: 1,000 MΩ MIN.
6. DIELETRIC STRENGTH: 2000V FOR 1 MIN.
7. SEALED TO IP65.
8. TRAVEL: 3.0mm FULL TRAVEL, 2.0mm LATCHING
9. ELECTRICAL LIFE: >50,000 CYCLES
10. OPERATING TEMP: -25C to +55C
11. PANEL THICKNESS: 0.5mm TO 3.0mm
▲ 12. LAMP : GREEN LED; 12VDC
13. ▲ DENOTES CRITICAL PARAMETER
▲ 14. PACKAGE: BOX/10 PER

REV	PCR NO	DESCRIPTION	DATE	BY
A	24209	RELEASED FOR PRODUCTION	3/2/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE LASEEV31JGRNGRN

SCALE	DATE	DR	DWG	REV
1:1	3/2/2020	MW	XF0929P	A