

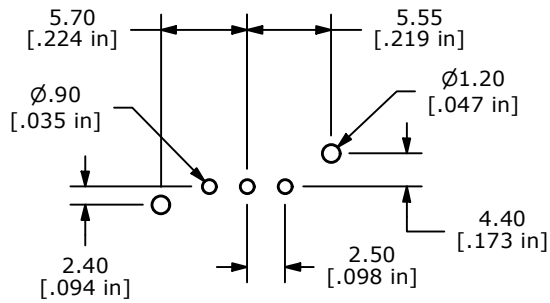
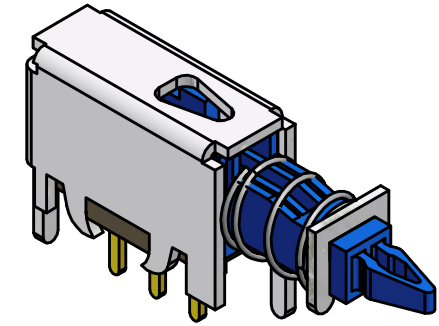


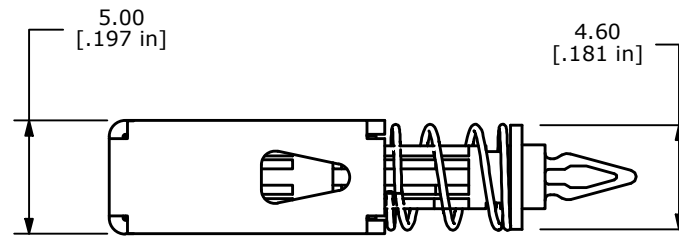

P.C.B. LAYOUT





ISOMETRIC

CIRCUIT: SPDT
NON-SHORTING

NOTES:

1. ALL DIMENSIONS IN MM.
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. RATING: DC 30V, 0.3A
- ▲ 5. ACTUATION FORCE: 460 ± 100 GF
7. TOTAL TRAVEL: 3.5 MM
8. TRAVEL TO LOCK: 2.5 MM
9. PACKAGING: 98 SWITCHES PER TUBE
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

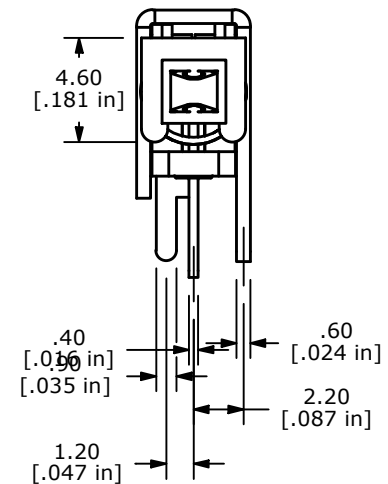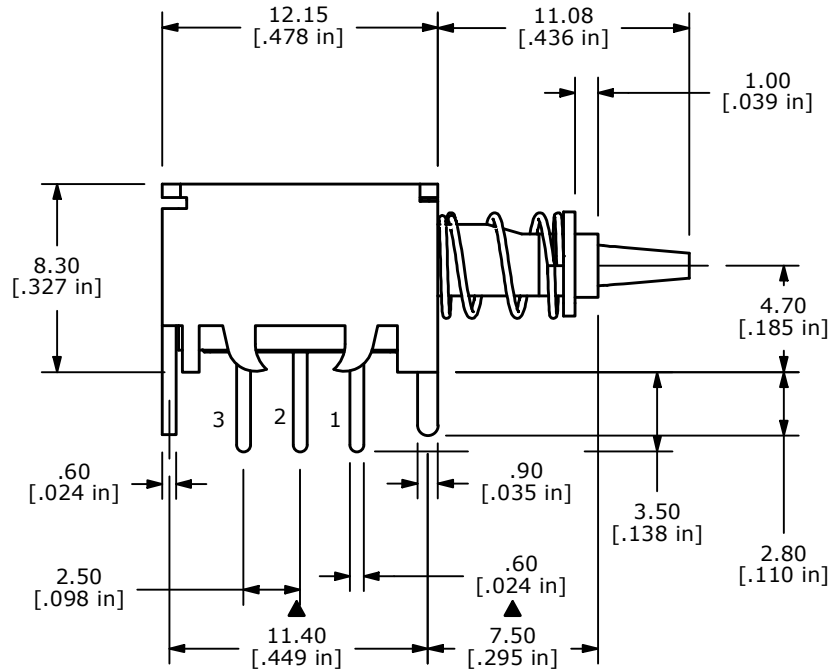

TITLE LC1258EEF460WEDGE

A	17972	RELEASED FOR PRODUCTION	2/18/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
3:1	2/18/2008	BLR	P070247	A