


RECOMMENDED P.C.B. HOLES

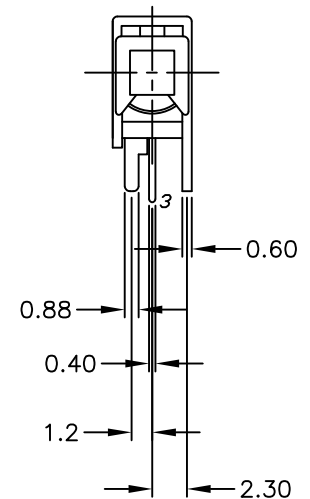
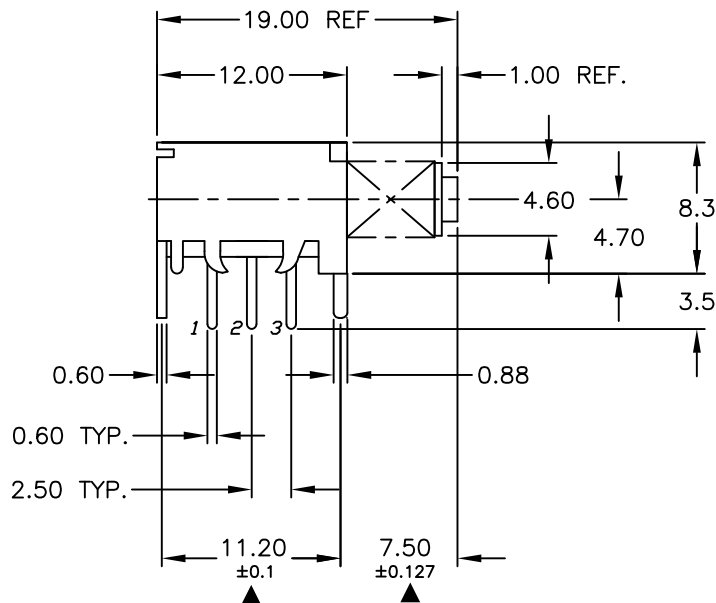
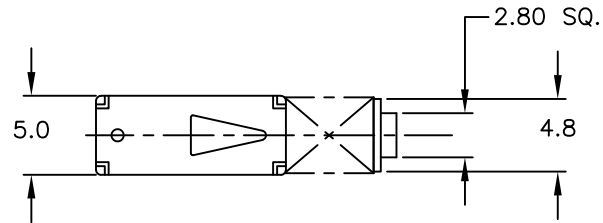


CIRCUIT: SPDT

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: DC 30V, 0.3A
5. ACTUATION FORCE: 275±75gf
6. PEAK OPERATING FORCE: 300±100gf
7. TRAVEL TO ACTUATE: 1.55±0.2mm
8. TRAVEL: TOTAL TRAVEL 3.55 ±0.2mm
9. PACKAGING: 98 SWITCHES PER TUBE
-TUBE PART NO. SEE 2000422
10. ▲ =DESIGNATE MAJOR DIMENSION

**E-SWITCH®**

TITLE

LC1258 EE N P 1.0mm SHAFT (SPECIAL)
(PACKAGE IN TUBES QTY 98)

SCALE

2:1

DATE

7/11/01

DR

CJB

DWG

PD70131

REV

D

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

D	14188	CHANGE PACKAGE QUANTITY	7/26/04	AR
C	11340	REVISED PACKAGING NOTES	11/2/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD