



SHEET OF

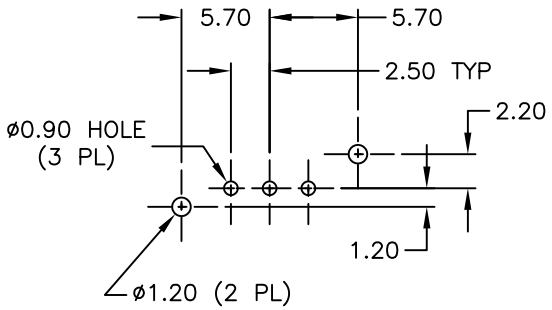


RECOMMENDED PCB LAYOUT

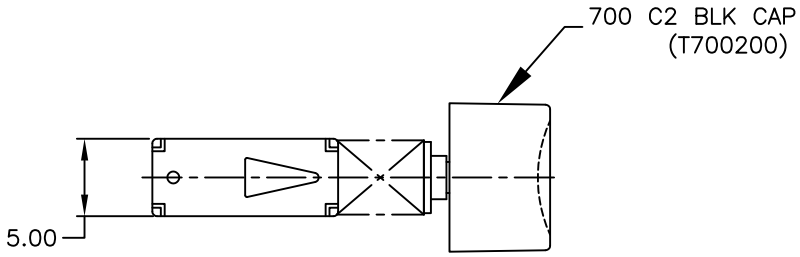

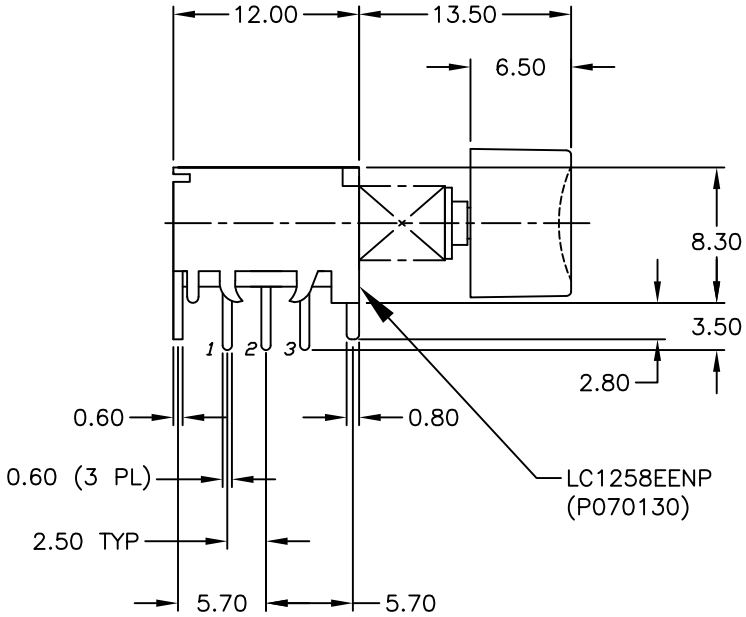

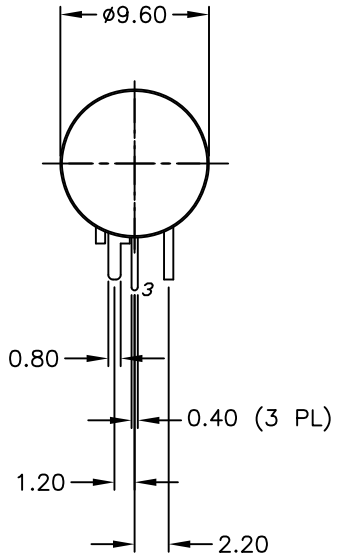



CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.3A @30V DC
5. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATE.
6. OPERATING FORCE: 230±100gf
7. TRAVEL: FULL: 3.5mm; LOCK: 2.5mm
8. TIMING: NON-SHORTING (BBM)
9. CONTACT RESISTANCE: 100mILLI-OHMS
10. INSULATION RESISTANCE: 500VDC-100MEGA-OHMS MIN.
11. WITHSTAND VOLTAGE: 500VAC for 1 minute.

OBJECT ID: 000028235

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	99999	ADDED SERVICE ITEM	1/10/24	MJR
A	11915	RELEASED FOR PRODUCTION	7/21/00	MM

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: LC 1258 EE NP/700 C2 BLK CAP

SCALE	DATE	DR	DWG	REV
2:1	7/21/00	MM	XP0199P	B