





P.C.B. LAYOUT




CURCUT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM.
2. GENERAL TOLERANCE: X.X= .04
X.XX= .025
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: DC 30V, 0.3A
5. ACTUATION FORCE: 275± 75GF
6. PEEK OPERATING FORCE: 300± 100GF
7. TRAVEL: TOTAL TRAVEL 3.55 ± 0.2MM
8. TRAVEL TO ATUATE: 1.55± 0.2MM
- ▲9. PACKAGING: 98 SWITCHES PER TUBE
-TUBE PART NO. SEE 2000422
10. ▲ DENOTES CRITICAL PARAMETER.

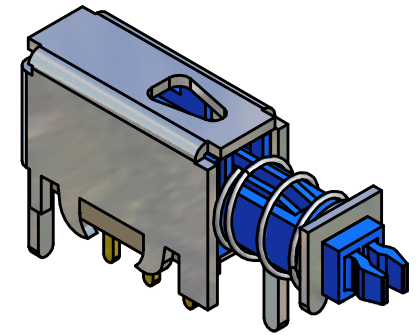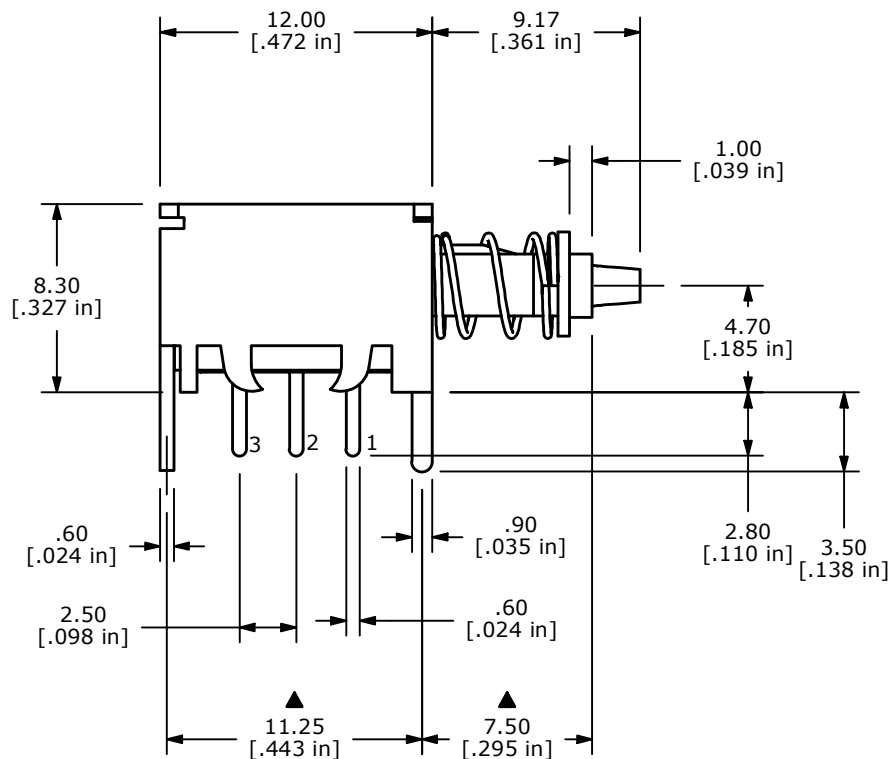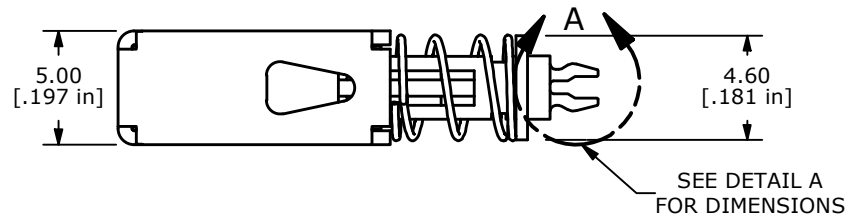

ISOMETRIC


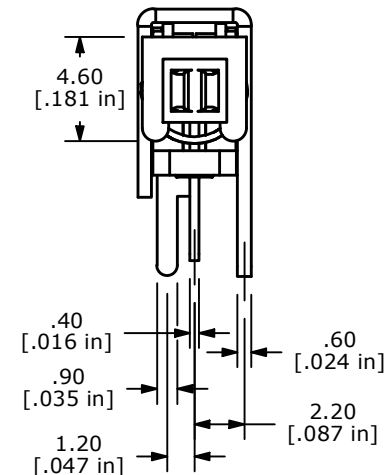
**E-SWITCH®**

TITLE LC1258EENP SPECIAL PLUNGER


B	14939	REVISED AND REDRAWN	5/24/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	3:1	DATE	5/5/2003	DR	AR	DWG	P070132	REV	B
-------	-----	------	----------	----	----	-----	---------	-----	---

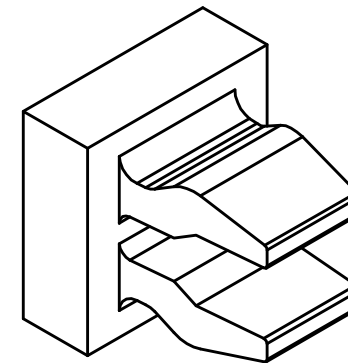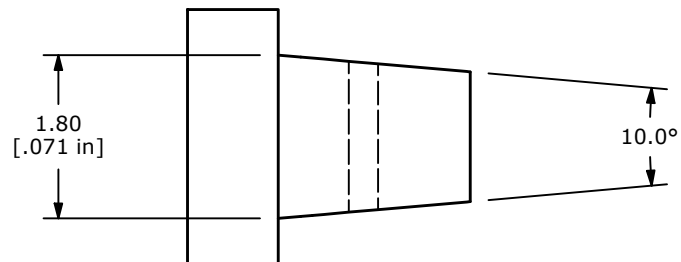

ISOMETRIC

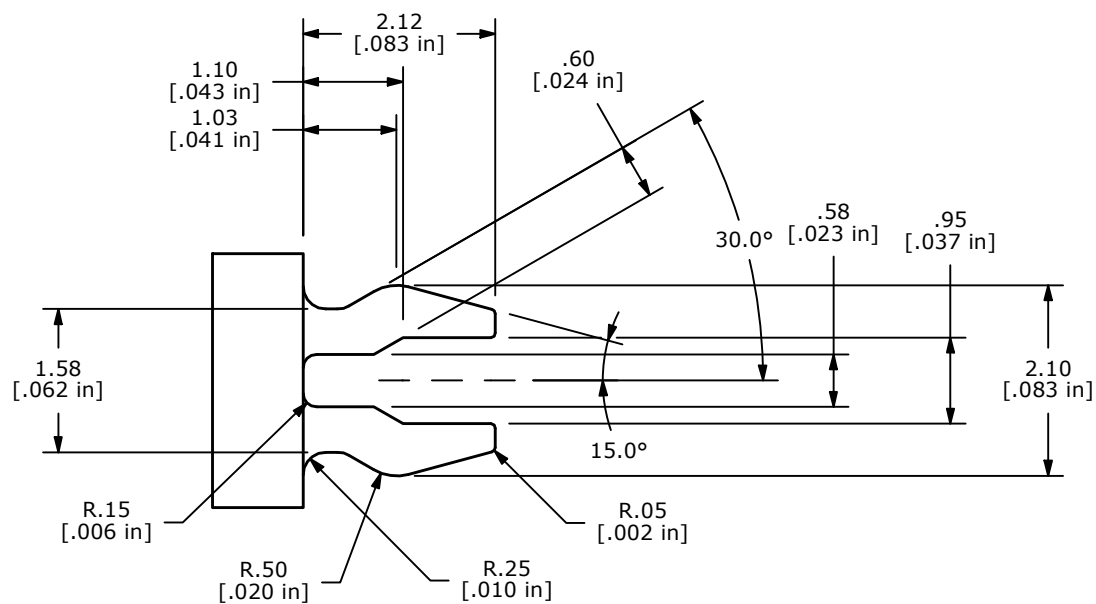

DETAIL "A"

E-SWITCH®

TITLE LC1258EENP SPECIAL PLUNGER

B		SEE SHEET 1 FOR FOR REV CHANGE		
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 12:1

DATE 5/5/2003

DR AR

DWG P070132

REV B