


SHEET 1 OF 1

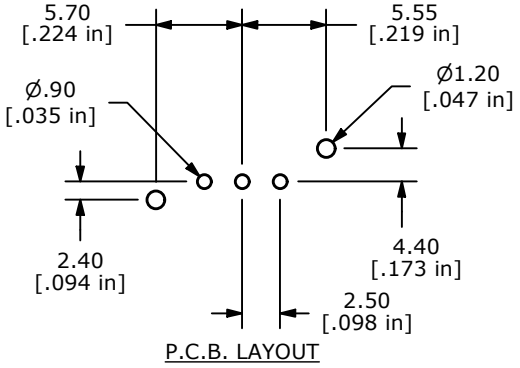


P.C.B. LAYOUT

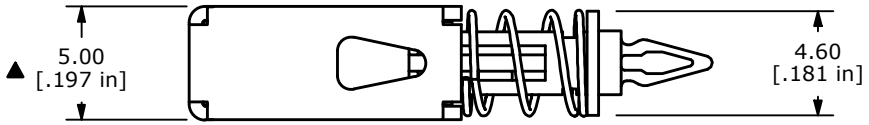


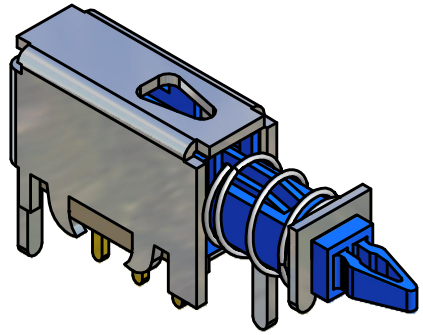


ISOMETRIC



CIRCUIT: SPDT
NON-SHORTING

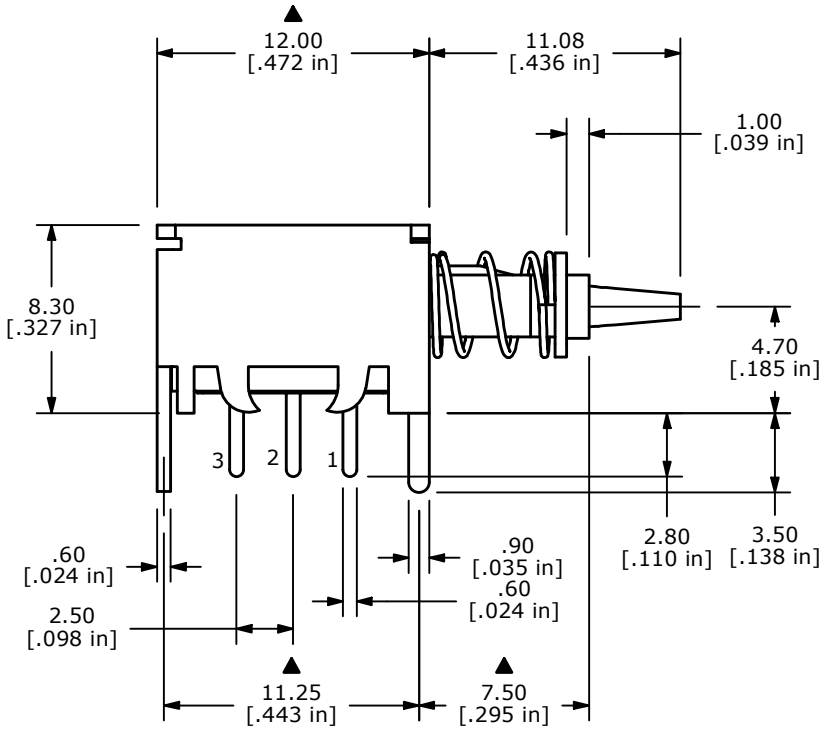

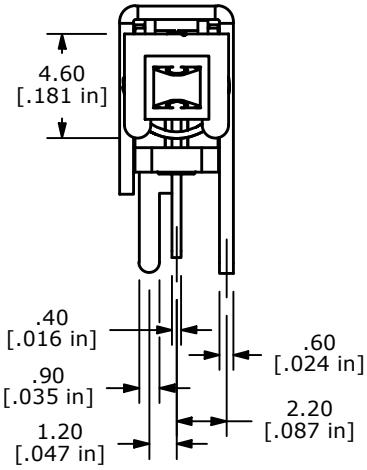

NOTES:
1. ALL DIMENSIONS IN MM.
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. ▲ RATING: DC 30V, 0.3A
5. ▲ ACTUATION FORCE: 460 ± 100 GF
6. TOTAL TRAVEL 3.5 ± 0.2MM
7. PACKAGING: 98 SWITCHES PER TUBE
8. ▲ DENOTES CRITICAL PARAMETER.
9. 2002/95/EC (ROHS) COMPATIBLE

REV	PCR NO	DESCRIPTION	DATE	BY
A	17971	RELEASED FOR PRODUCTION	2/18/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE LC1258OAF460WEDGE

SCALE	DATE	DR	DWG	REV
3:1	2/18/2008	BLR	P070246	A