

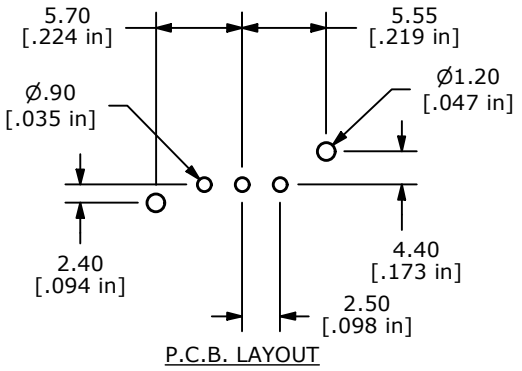
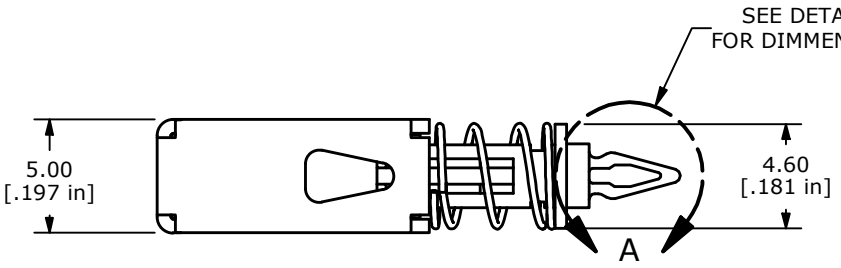



P.C.B. LAYOUT

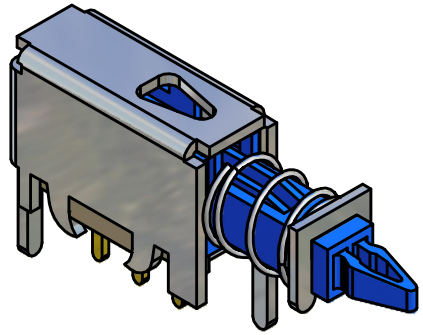




ISOMETRIC



CURCUT: SPDT


DETAIL A

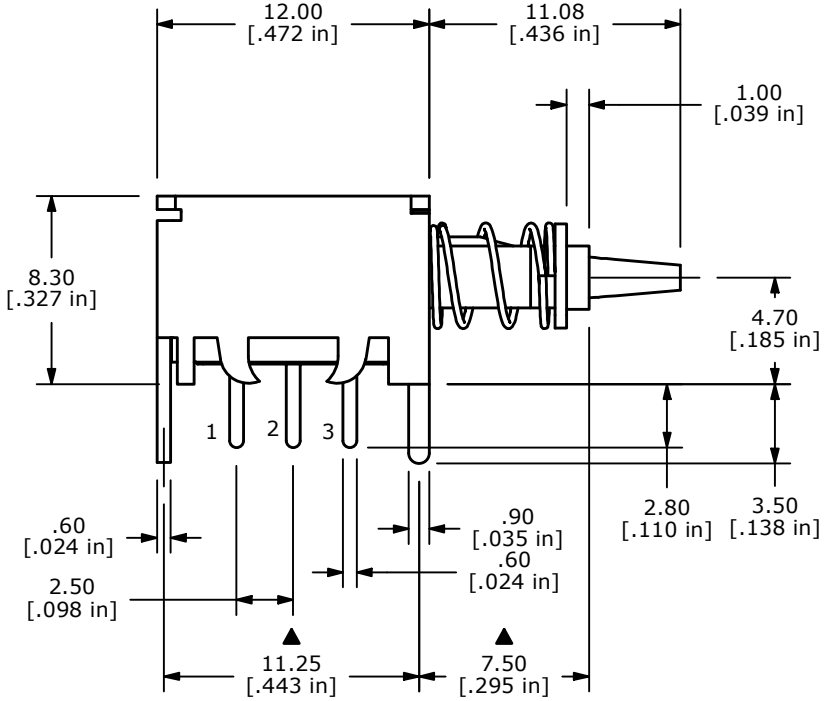

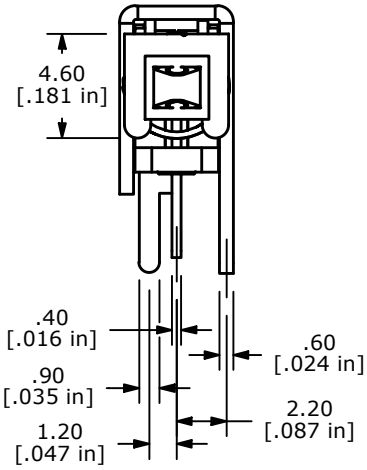

NOTES:
1. ALL DIMENSIONS IN MM.
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: DC 30V, 0.3A
5. ACTUATION FORCE: 275± 75GF
6. PEEK OPERATING FORCE: 300± 100GF
7. TRAVEL: TOTAL TRAVEL 3.55 ± 0.2MM
8. TRAVEL TO ATUATE: 1.55± 0.2MM
9. PACKAGING: 98 SWITCHES PER TUBE
   -TUBE PART NO. SEE 2000422
10. DENOTES CRITICAL PARAMETER.


REV	PCR NO	DESCRIPTION	DATE	BY
B	14939	ADDED NOTES	5/20/05	JB
A	14928	RELEASED FOR PRODUCTION	5/17/05	JB


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED


E-SWITCH®

TITLE LC1258EENP WEDGE PLUNGER

SCALE	DATE	DR	DWG	REV
3:1	4/26/2005	AR	P070244	B

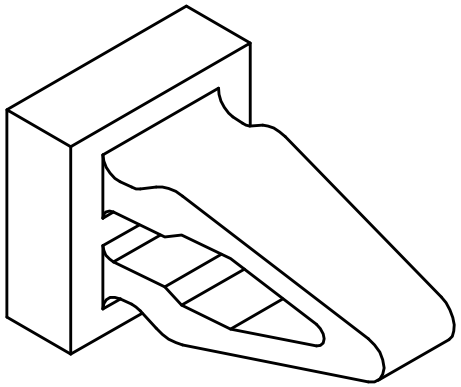

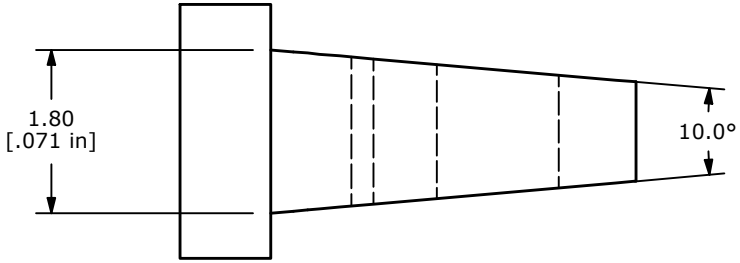

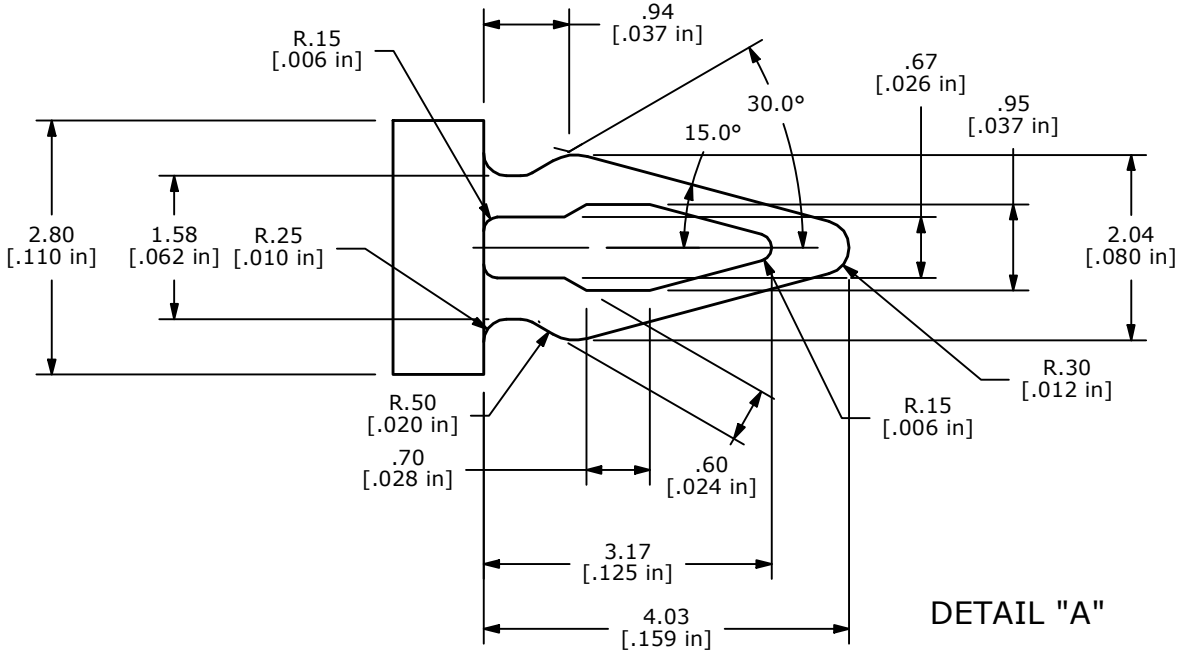

DETAIL "A"

REV	PCR NO	DESCRIPTION	DATE	BY
B		SEE SHEET 1		JB
A	14921	RELEASED FOR PRODUCTION	5/17/05	JB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE LC1258EENP WEDGE PLUNGER

SCALE	DATE	DR	DWG	REV
12:1	4/26/2005	AR	P070244	B