



SHEET 1 OF 1

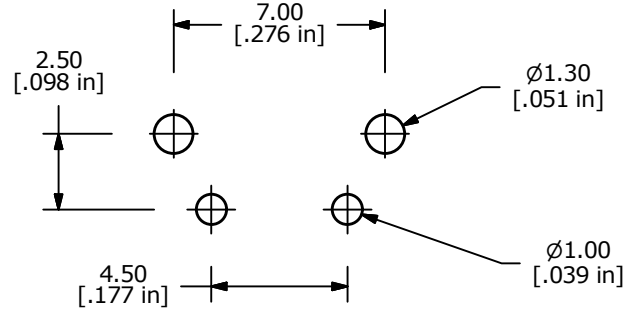


P.C.B. MOUNTING HOLE LAYOUT

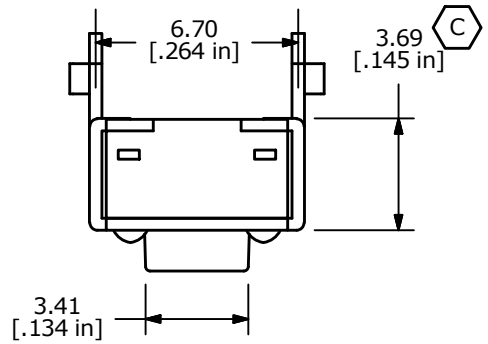


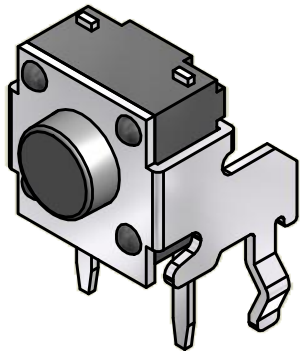



CIRCUIT: SPST

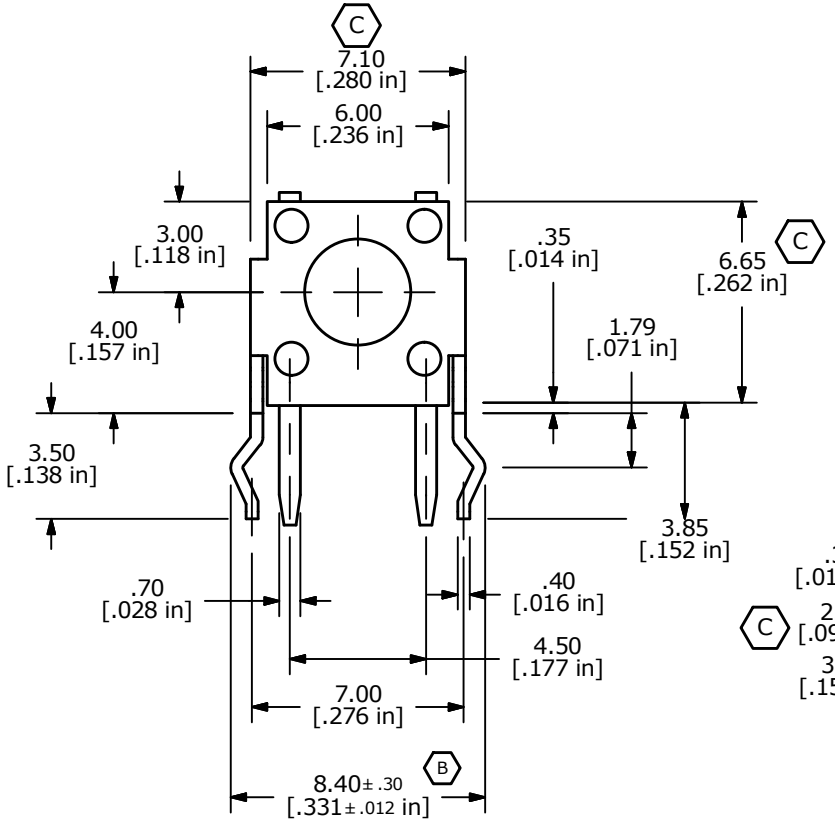

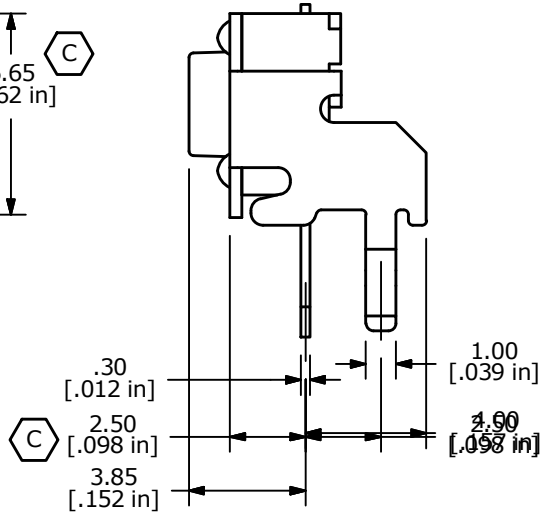

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.xx ± 0.4
   x.xx ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25± 0.1mm
6. CONTACT RESISTANCE: 50m ohms max initial.MOS & TTC COMPATIBLE
7. ELECTRICAL LIFE: 5,000,000 CYCLES MIN.
8. INSULTION RESISTANCE: 100M ohms min.
9. DIELECTRIC STRENGTH: 250VA
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER
▲12. CONTACTS: SILVER PLATED
▲13. OPENING FORCE: 65± 20 GRAMS
14. PACKAGING: 1000 PCS PER POLYBAG

REV	PCR NO	DESCRIPTION	DATE	BY
C	20784	UPDATE AND CORRECT DIMS	9/27/12	EBP
B	18742	LEG TOLERANCE WAS +/- 0.1	1/4/2010	BLR
A	16116	NEW PART RELEASE	6/13/06	CT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH® | LAMB™ INDUSTRIES

TITLE LL1105VF065Q

SCALE	DATE	DR	DWG	REV
4:1	1/4/2010	BLR	P090004	C