





|           |           |
|-----------|-----------|
| O.P. (MM) | P.T. (MM) |
| 15.3±0.5  | 2.0 MAX.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]  
 2. GENERAL TOLERANCE: X.XX $\pm$ 0.4  
     X.XX $\pm$ 0.25  
 3. RATING: 15A @125/250VAC UL, CUL APPROVED  
 ▲ 4. OPERATING FORCE: 160  $\pm$  40 GRAMS  
 5. OPERATING TEMP: -25°C TO 85°C  
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.  
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.  
 8. INSULATION RESISTANCE: 100 Mega-OHMS MIN.  
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)  
 10. CONTACT RESISTANCE: 100 Milli-OHMS MAX.  
 11. ▲ DENOTES CRITICAL PARAMETER.

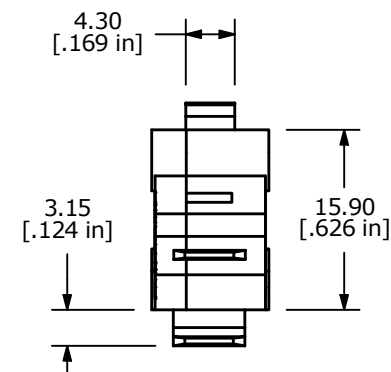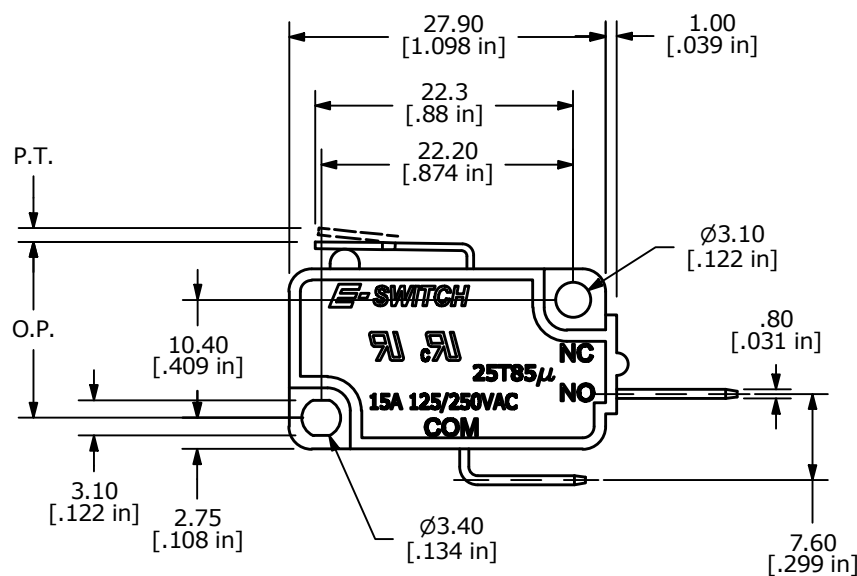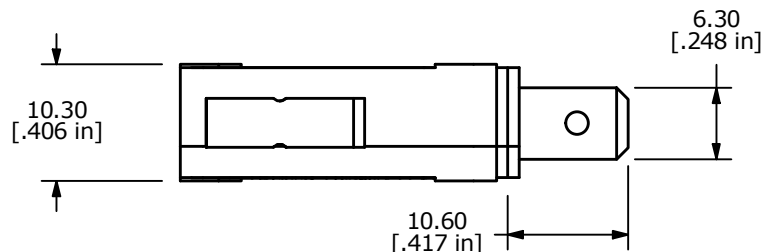

|                                                                                                              |            |                            |          |    |                                                                                                            |                  |           |                |          |           |
|--------------------------------------------------------------------------------------------------------------|------------|----------------------------|----------|----|------------------------------------------------------------------------------------------------------------|------------------|-----------|----------------|----------|-----------|
| REV                                                                                                          | ECO NO     | DESCRIPTION                | DATE     | BY | <div> E-SWITCH®</div> |                  |           |                |          | OBJECT ID |
| B                                                                                                            | ECO-100839 | REMOVE VDE RATING AND LOGO | 04/28/22 | JS |                                                                                                            |                  |           |                |          | 000021072 |
|                                                                                                              |            |                            |          |    | TITLE LS0851501F160C2C                                                                                     |                  |           |                |          |           |
|                                                                                                              |            |                            |          |    |                                                                                                            |                  |           |                |          |           |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                            |          |    | SCALE<br>3:2                                                                                               | DATE<br>4/8/2010 | DR<br>BLR | DWG<br>Q950088 | REV<br>B |           |