


SHEET 1 OF 1

▲ O.P. (MM)	P.T. (MM)
20.0±1.5mm	5.2 MAX


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

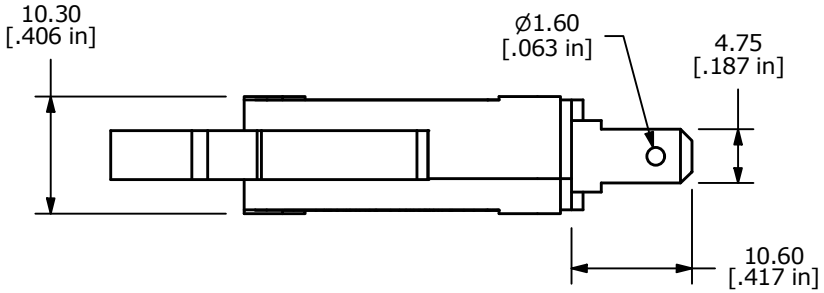


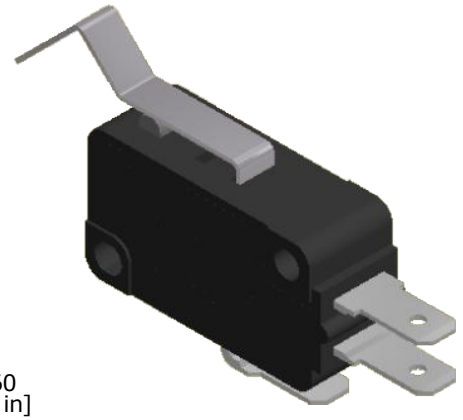



CIRCUIT DIAGRAM: SPDT ▲

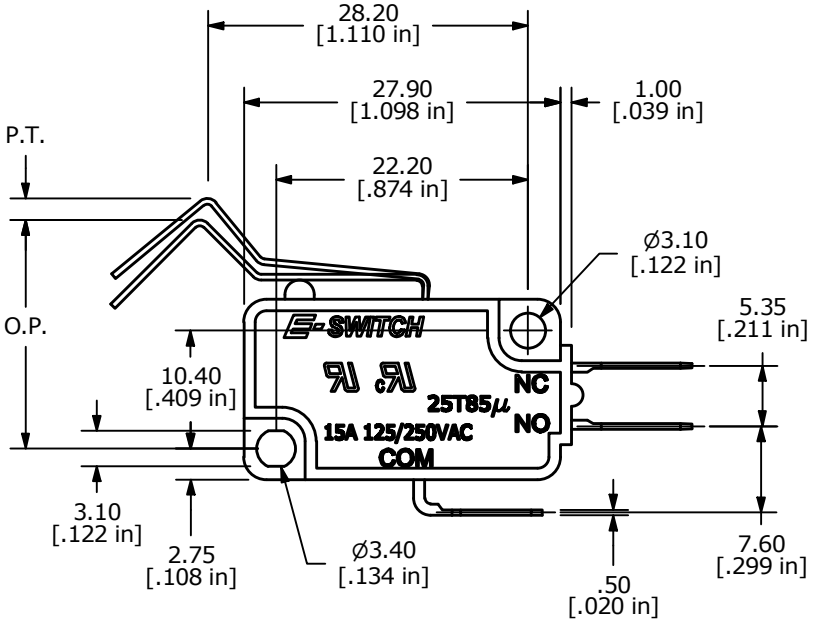

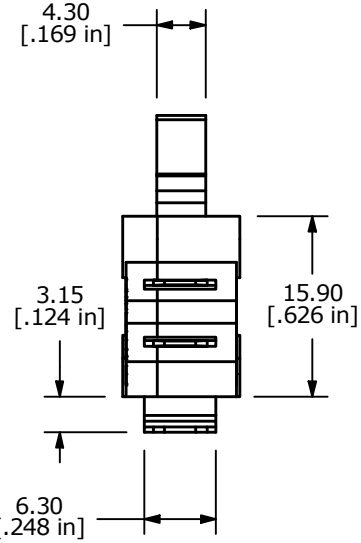

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. RATING: 15A @125/250VAC UL, CUL APPROVED
▲4. OPERATING FORCE: 110± 25 GRAMS
5. OPERATING TEMP: -25˚C TO 85˚C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MΩ MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 mΩ MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100840	REMOVE VDE RATING AND LOGO	04/21/23	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

OBJECT ID 000021082

TITLE LS0851512F110C1A

SCALE	DATE	DR	DWG	REV
3:2	5/18/2012	DRG	Q950098	C