


SHEET 1 OF 1



P.C. MOUNTING

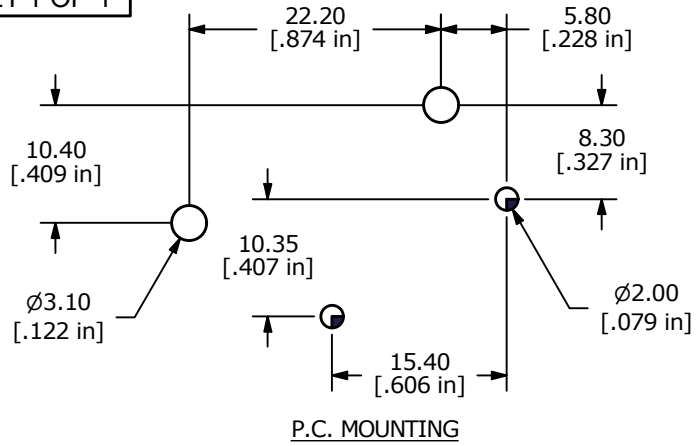

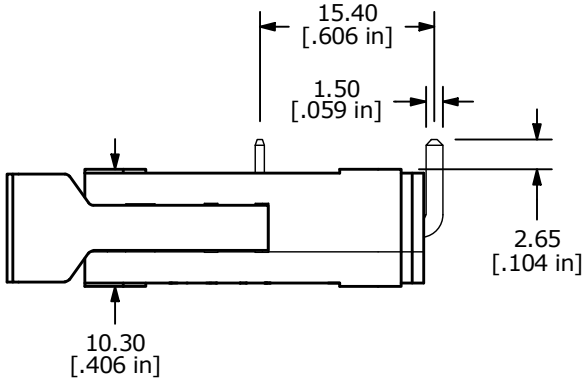


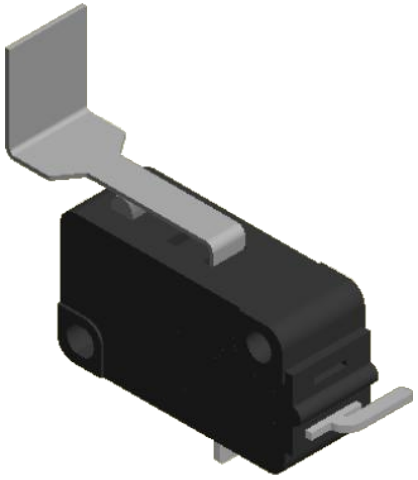


CIRCUIT: SPST
NORMALLY OPEN

▲ O.P. (MM)	P.T. (MM)
28.5 ± 1.2	3.5mm

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

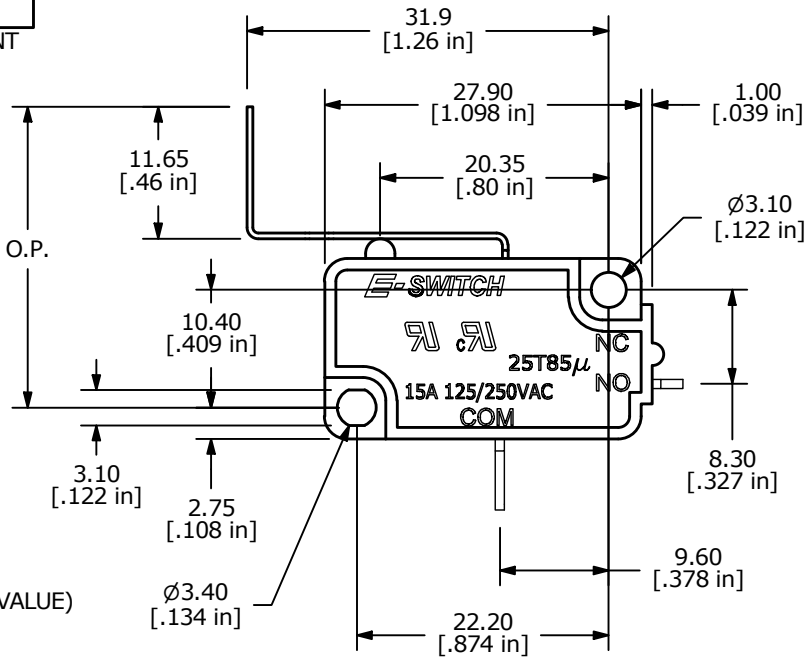

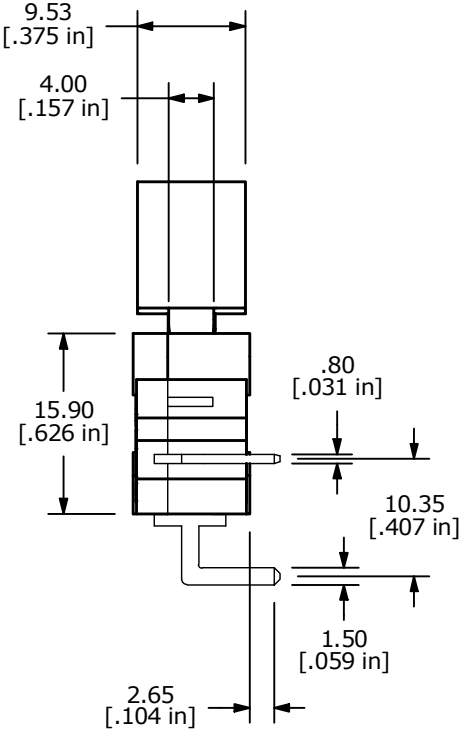

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. RATING: 15A @125/250VAC UL, CUL APPROVED
▲ 4. OPERATING FORCE: 130 ± 50 GRAMS
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-100848	REMOVE VDE RATING AND LOGO	05/09/22	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000021109

TITLE LS0851520F130V1C

SCALE	DATE	DR	DWG	REV
3:2	9/24/2013	RC	Q951000	B