





O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

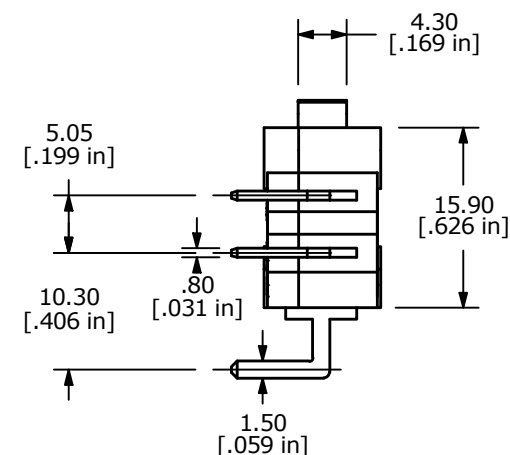

1. ALL DIMENSIONS IN MM [INCH]

2. GENERAL TOLERANCE: $X, X = \pm 0.4$

$$X.XX = \pm 0.25$$

3. RATING: 0.4VA @20 VDC or VAC MAX.

- ▲ 4. OPERATING FORCE: 160 ± 40 GRAMS

5. OPERATING TEMP: -25°C TO 85°C

6. ELECTRICAL LIFE: 50,000 CYCLES MIN.

7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.

8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.

9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)

10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.

11. ▲ DENOTES CRITICAL PARAMETER.

 E-SWITCH®		OBJECT ID 000021058
TITLE	LS085R101F160V2A	

SCALE 3:2	DATE 8/5/2009	DR BLR	DWG Q950074	REV B
--------------	------------------	-----------	----------------	----------