


SHEET 1 OF 1

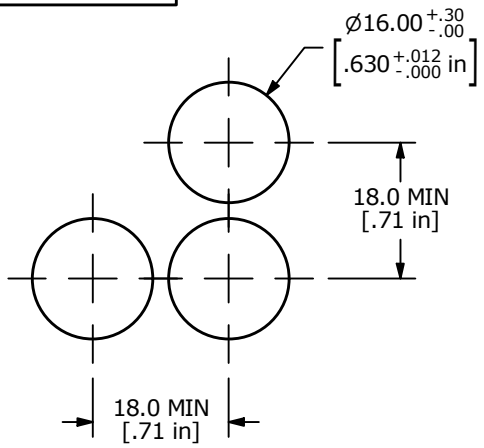


PANEL MOUNTING




SPDT
CONTACT CONFIGURATION

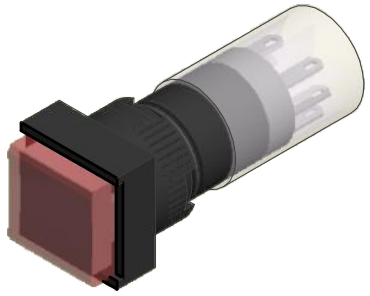

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
2	1	F050417	50-004-17 6VDC RED LED
3	1	F040011	P16EES11 (BEZEL)
4	1	F050304	50-003-04 CONCAVE RED LENS

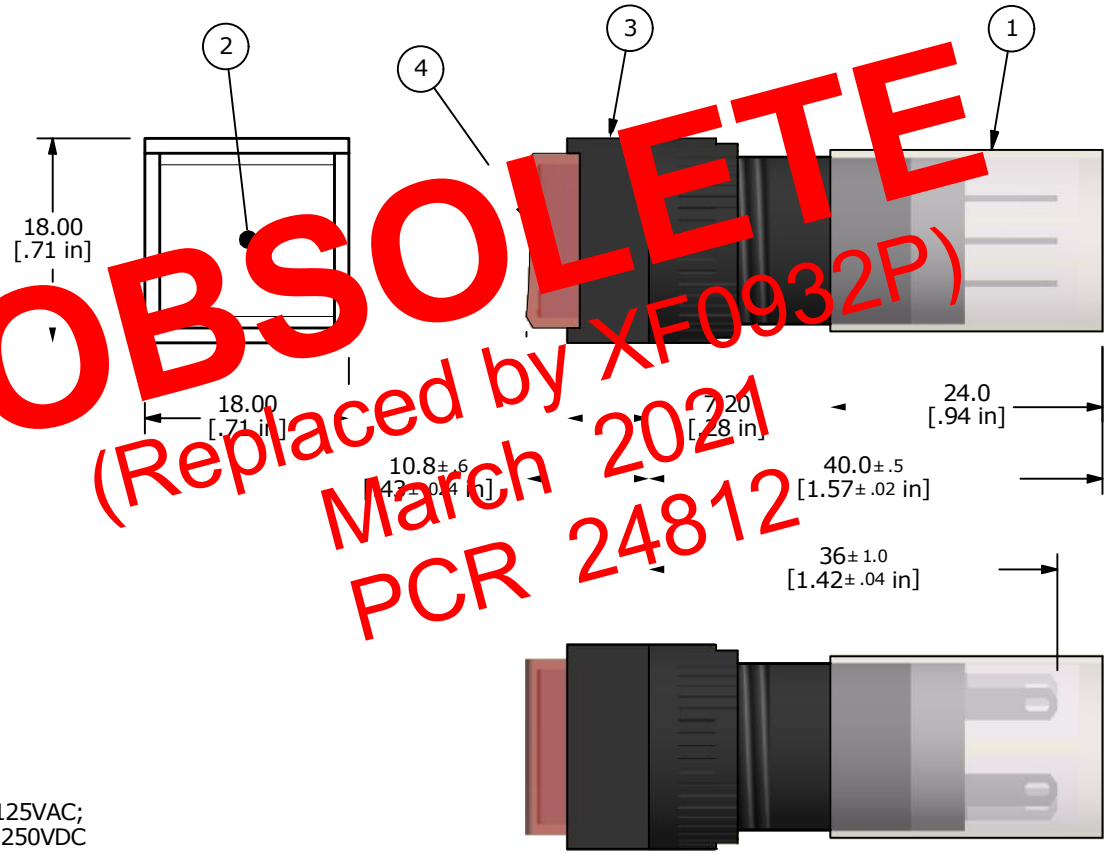



OBSOLETE
(Replaced by XF0932P)
March 2021
PCR 24812

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 5A@ 250VAC; 8A 125VAC;
   6A@ 24VDC; 0.2A 250VDC
5. ELECTRICAL LIFE: 50,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
▲ 8. LAMP VOLTAGE: 6VDC RED LED
9. ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
A	24791	RELEASE	3/11/21	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE P16EES11HREDRED

SCALE	DATE	DR	DWG	REV
2:1	3/11/2021	MW	XP0931P	A