
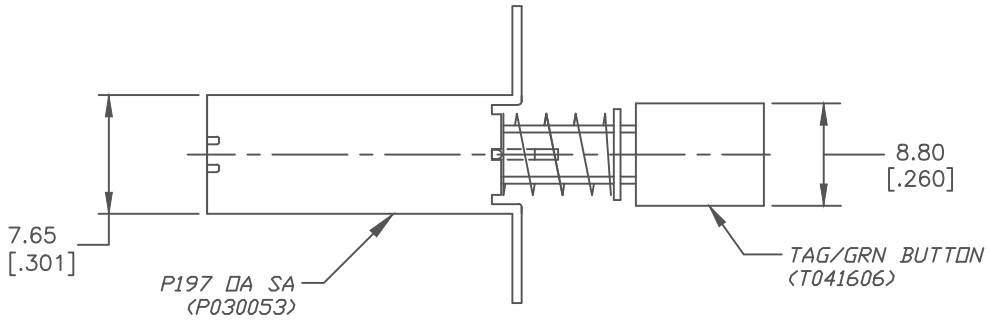


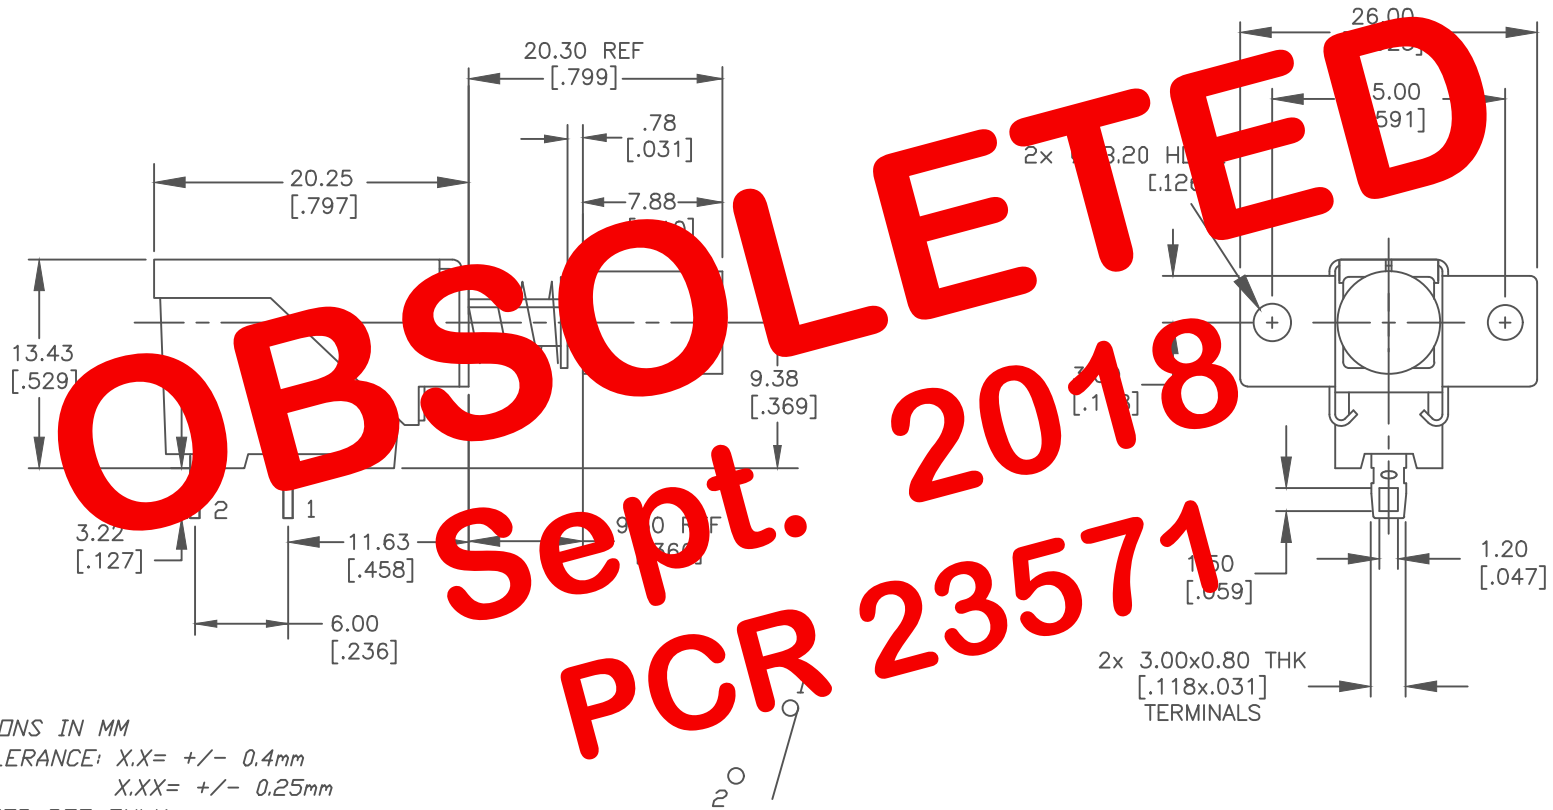

OBSOLETED
Sept. 2018
PCR 23571

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= +/- 0.4mm
   X.XX= +/- 0.25mm
3. TERM. NOS. FOR REF ONLY
4. RATING: AC250V 5A/80A
5. CONTACT RESISTANCE: 100 milli Ohms MAX. (AT DC5V 1A)
6. DIELECTRIC STRENGTH: AC 1000V FOR 1 MIN.
7. OPERATING FORCE: 350±100gf
8. TRAVEL: FULL STROKE: 3.5 +0.5/-0mm
9. 2002/95/EC (ROHS) COMPLIANT

CIRCUIT: SPST (Normally Open)

CONTACT CONFIGURATION

PCR No.	REV.	DESCRIPTION	DATE
17852	C	RELEASE FOR PRODUCTION	11/12/07

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TOLERANCES	±0.4	±0.25
	0.0	0.00

TITLE: P197DASATAGGRN

SCALE	DATE	DR	DWG	REV
2:1	7/17/96	MM	XP0197A	C