

SHEET 1 OF 1

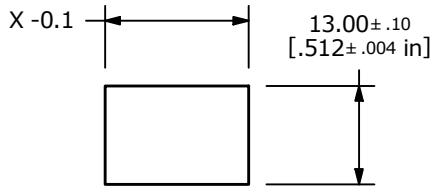


PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8


RECOMMENDED
PANEL CUT-OUT





▲OFF-ON
DPST

SCHEMATIC

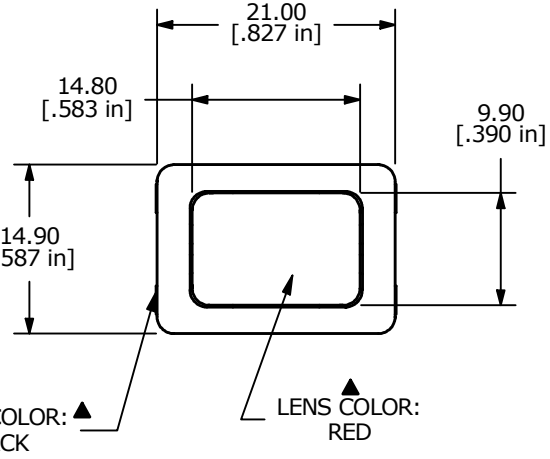

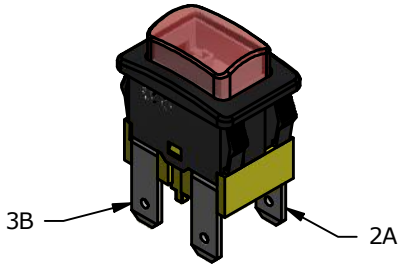

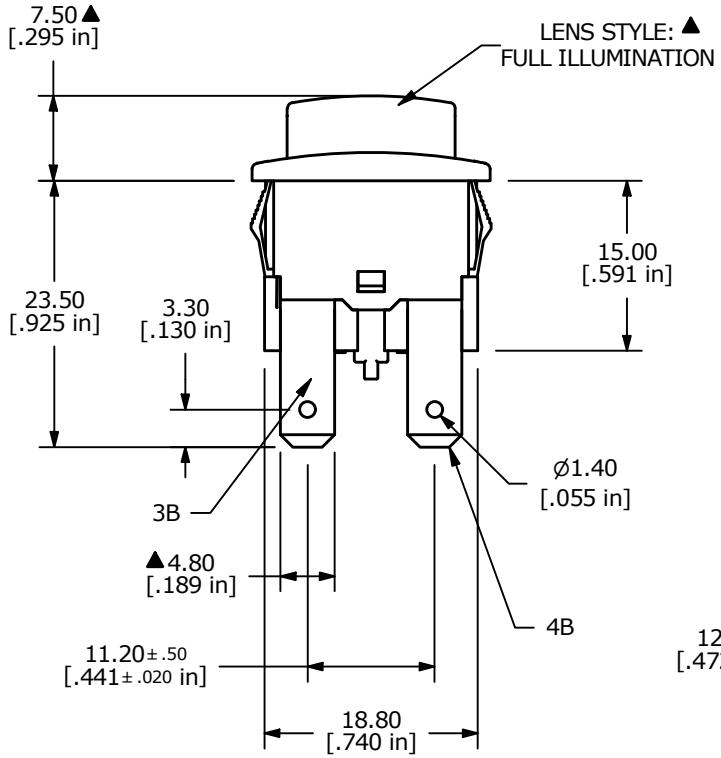

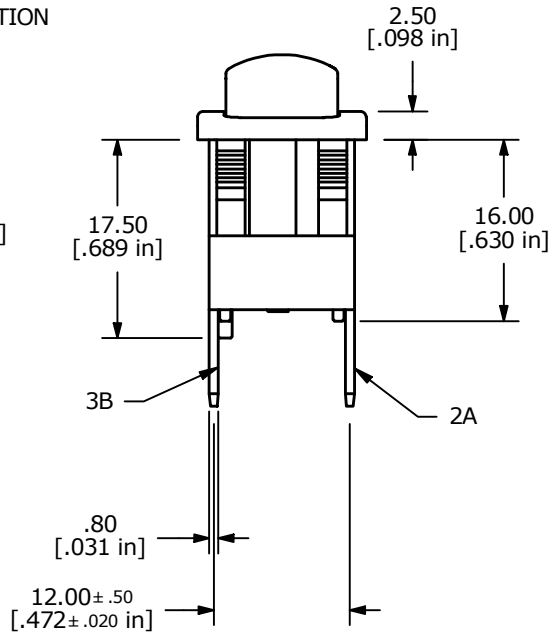

NOTES:
1. ALL DIMESNSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. ELECTRICAL LIFE: 6,000 [cURus]
▲4. CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
5. INSULATION RESISTANCE: 100 MΩ AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
9. ILLUMINATION VOLTAGE: 125V
10. TERMINALS TO BE SILVER PLATED
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100481	REMOVE VDE FROM NOTES	12/13/21	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000000195

TITLE PA412C1000-116

SCALE	DATE	DR	DWG	REV
3:2	8/7/2014	RC	14-PA412C1000116	C