

SHEET 1 OF 1

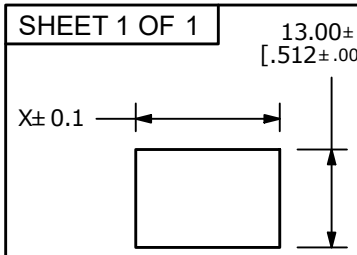


PANEL THICKNESS	X
0.50-1.20	19.0
1.20-2.00	19.3
2.00-3.00	19.6


RECOMMENDED
PANEL CUT-OUT




▲ OFF - ON
DPST


SCHEMATIC

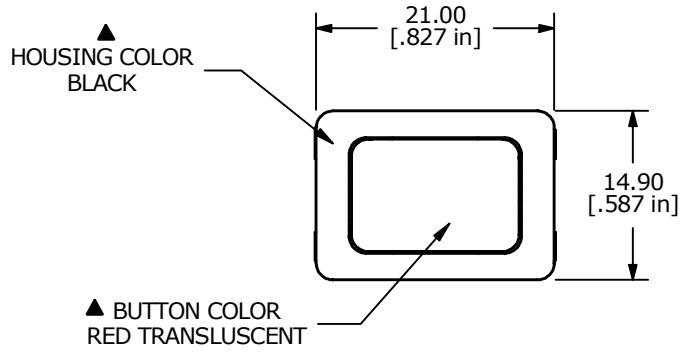




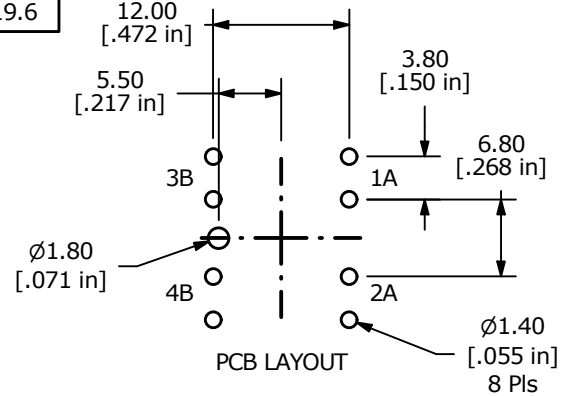

PCB LAYOUT

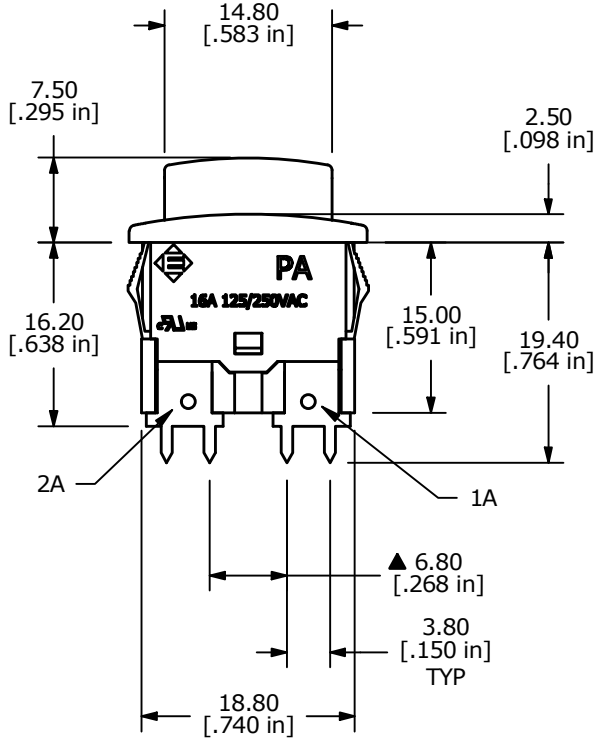

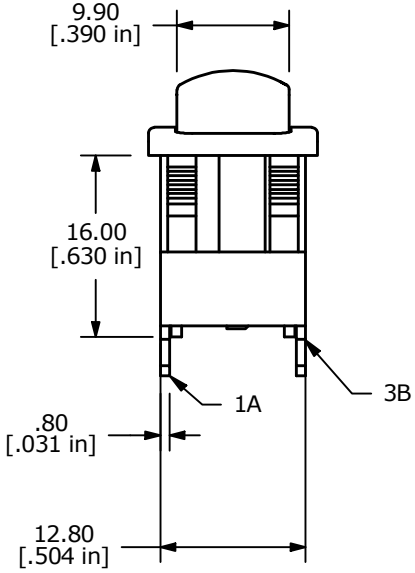

NOTES:
1. ALL DIMESNSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. ELECTRICAL LIFE: 6,000 cURus
4. CONTACT RESISTANCE: 20mΩ
5. INSULATION RESISTANCE: 100MΩ AT 50VDC
6. OPERATING TEMPERATURE: -20˚C TO +65˚C cURus
7. CONTACT RATING: 16A, 125VAC-250VAC, cURus APPROVED
▲ 8. LAMP VOLTAGE: 125V
9. DIELECTRIC STRENGTH: 1000V FOR 1 MIN
10. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100489	REMOVE VDE FROM NOTES	12/13/21	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

OBJECT ID 000000227

TITLE PA4N42C1000-116

SCALE	DATE	DR	DWG	REV
3:2	8/8/2014	RC	14-PA4N42C1000116	C