


SHEET 1 OF 1

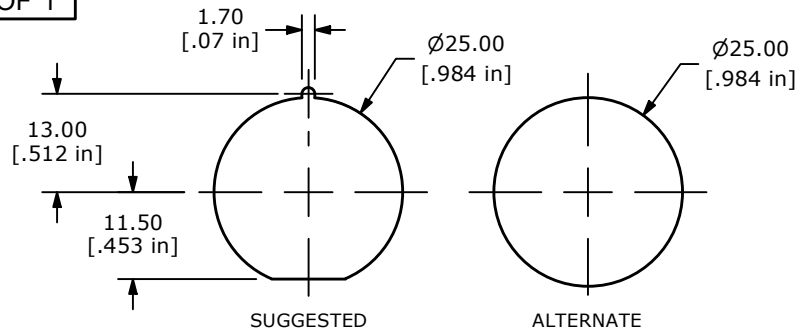


PANEL CUTOUTS

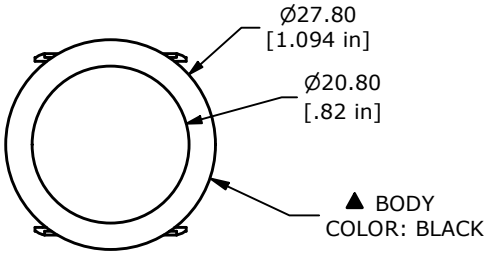

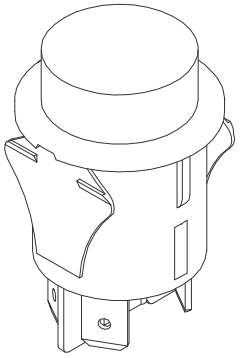



▲ SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-3, 2-4

(ON) = MOMENTARY




▲ DPST
CONTACT CONFIGURATION

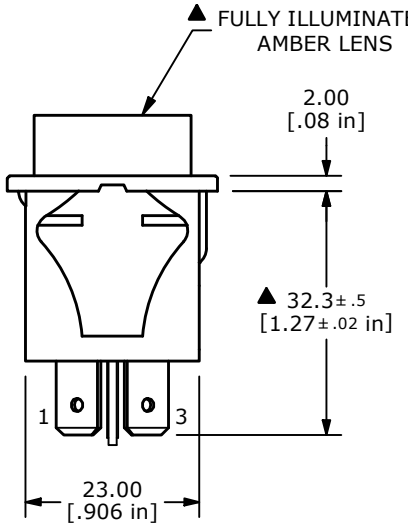

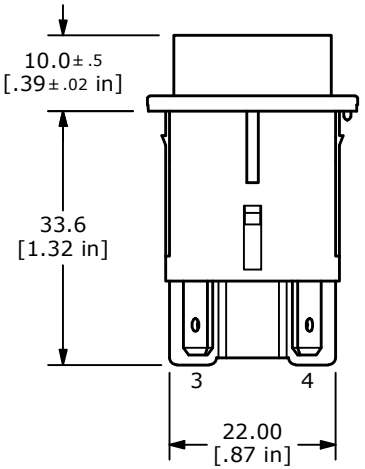

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = 0.4
   X.XX = 0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY.
▲ 4. CONTACT RATINGS:
   ANSI/UL 1054 AND CAN/CSA C22.2 NO.55 (E194579)
   16A 125VAC [UR, cUR]
   1/2HP 125VAC, 3/4HP 250VAC [UR, cUR]
   EN 61058-1: 2002:
   16(6)A 250V~ 1E4 T125/55 [ENEC14]
   10(4)A 250V~ 5E4 T125/55 [ENEC14]
5. CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC
6. INSULATION RESISTANCE: 100MΩ @ 500VDC
7. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE
8. ELERTICAL LIFE: 6,000 CYCLES [UR, cUR]
   10,000 CYCLES [ENEC14]
   50,000 CYCLES [ENEC14]
9. OPERATING TEMP: -20°C to 105°C [UR, cUR]
   -20°C to 125°C [ENEC14]
10. ▲ DENOTE CRITICAL PARAMETER
▲ 11. ILLUMINATION VOLTAGE: 12V
▲ 12. LENS COLOR: AMBER (Orange)

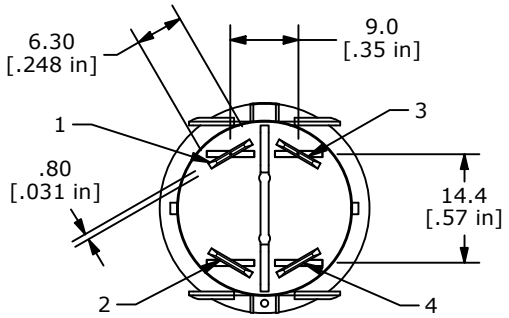

REV	PCR NO	DESCRIPTION	DATE	BY
A	24250	RELEASE	4/7/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE PR14EC1000-124

SCALE	DATE	DR	DWG	REV
1:1	4/7/2020	MW	38-PR14EC1000124	A