

SHEET 1 OF 1




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS
11.0 [.43 in]

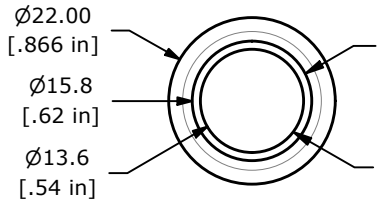



▲ RING
ILLUMINATION COLOR:
GREEN

▲ FLAT
ACTUATOR FINISH:
STAINLESS STEEL





▲

| SWITCH FUNCTION | |
|---|---|
| POS. 1 | POS. 2 |
| ON | ON |
| 1-3 | 1-2 |





▲ SPDT
CONTACT CONFIGURATION

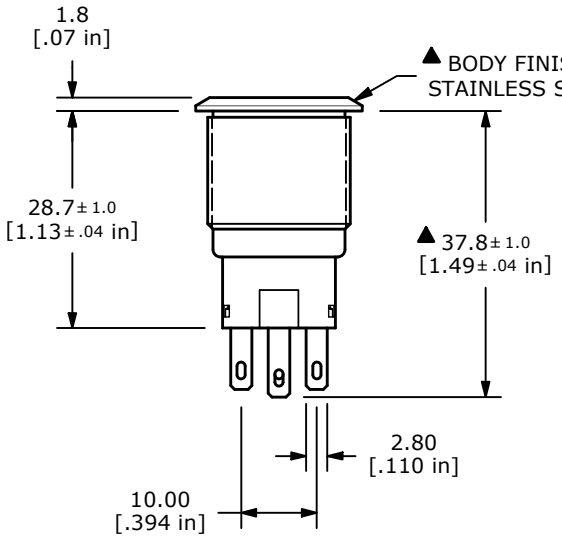

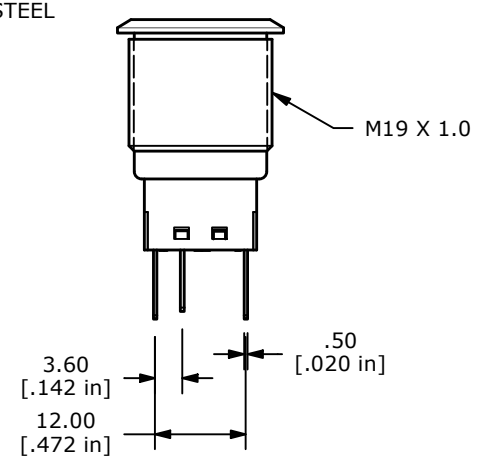
NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C TO 85°C
11. TRAVEL: 2.8 [.11 in]
12. ▲ DENOTES CRITICAL PARAMETER
13. INGRESS PROTECTION: IP67
▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT
▲ 15. ILLUMINATION VOLTAGE: 24V




| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| C | ECO-103865 | PV4 SERIES UPDATE | 01/14/26 | MR |
| | | | | |
| | | | | |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH®

OBJECT ID 000002565

TITLE PV4F230SS-335

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 1:1 | 8/22/2012 | RC | 52-PV4F230SS335 | C |